

Press Fittings


We feel better under pressure





Vitillo

Hydraulic Components

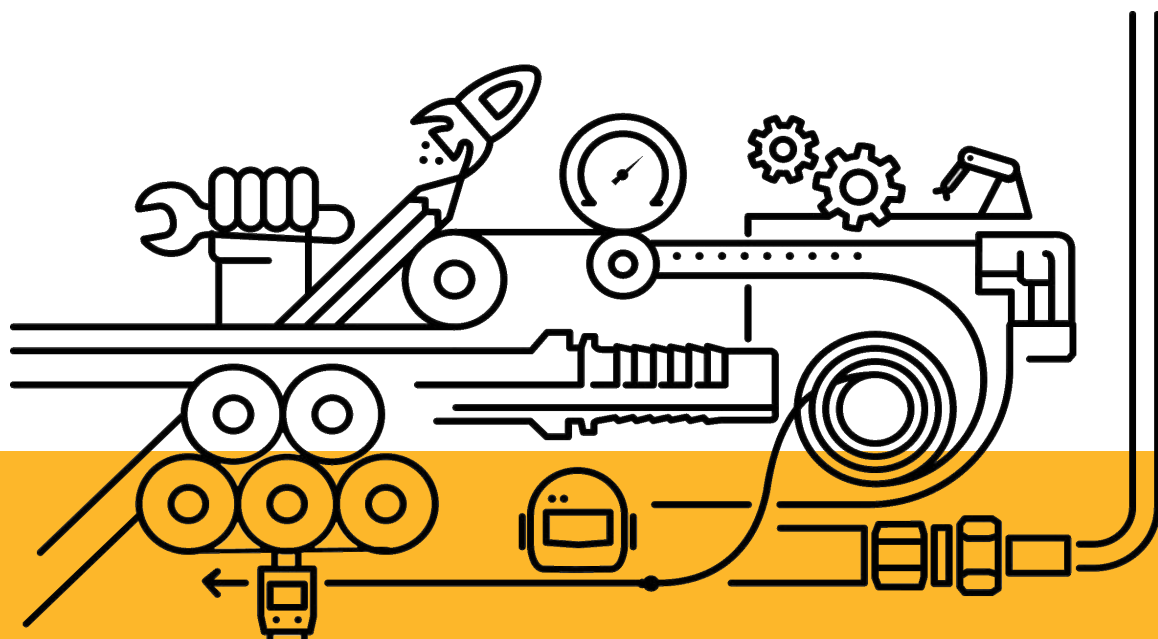

Hoses



Press fittings ISO 12151 SAE J516



BSP adaptors BS 5200



JIC adaptors SAE J514



DIN 24° adaptors DIN 2353



ORFS adaptors ORFS J1453



Complete product range


Vitillo is your solution for any hydraulic applications. Spiral and braided hoses with metal and textile reinforcement, standard and interlock press fittings, BSP, JIC, DIN and ORFS adaptors, customized special fittings.

All our fittings and adapters are available in Zinc chromium III plating, Zinc-nichel plating and Stainless steel.

Whatever the customer's needs, Vitillo has the answer.

Alternative Versions

Zinc Chromium III




01. Sealing Layer


02. Passivation

03. Zinc Cr III

04. Carbon Steel



Zinc Nickel



01. Sealing Layer


02. Passivation

03. Zinc Cr III

04. Carbon Steel



Stainless Steel




01. Stainless Steel





Applications

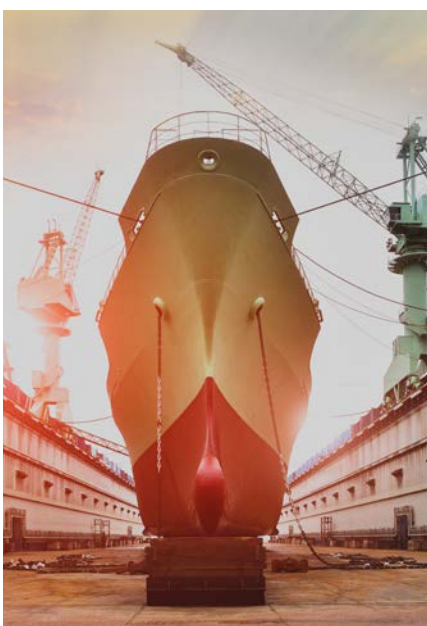

High performances in very extreme conditions



Certifications



▼

MINE SAFETY AND HEALTH
ADMINISTRATION
(MSHA)




▼

DET NORSKE VERITAS (DNV)
GERMANISCHER LLOYD (GL)



▼

RINA (Registro Navale Italiano)



▼

MarED



▼

GOST-R



AC 149



HAMILTON

▼

J.S. Hamilton Poland Sp. z o.o. –
Jednostka Certyfikująca



▼

UNI EN 45545-2

Visual index


Ferrules for Standard Fittings	
--------------------------------	--

Visual index


BSP - BSPT	FDG SP BSPP FEMALE (thrust-wire nut) / Pg. 52	F90G SP BSPP FEMALE 90° ELBOW (thrust-wire nut) / Pg. 54	F45G SP BSPP FEMALE 45° ELBOW (thrust-wire nut) Pg. 56	MGSP BSPP MALE (flat seat) / Pg. 58	FGSP BSPP FEMALE (flat seat) / Pg. 59
	MNPT NPTF MALE / Pg. 60	MNPT LN NPTF MALE (long nose) / Pg. 62	FNPSM NPSM FEMALE / Pg. 63	MNPT SW NPTF SWIVEL MALE / Pg. 64	
	M90NPTF SW NPTF SWIVEL MALE 90° ELBOW / Pg. 65	MJ JIC 37° MALE / Pg. 66	FDJ JIC 37° FEMALE / Pg. 68	FDJ GIR JIC 37° FEMALE SWIVEL (double hex) / Pg. 70	F90J JIC 37° FEMALE SWIVEL 90° / Pg. 72
NPT					
	F90J K JIC 37° FEMALE 90° ELBOW (compact forged) / Pg. 74	F90J LD JIC 37° FEMALE SWIVEL 90° (long drop) / Pg. 76	F45J JIC 37° FEMALE SWIVEL 45° / Pg. 77		
	FDJ SP JIC 37° FEMALE (thrust-wire nut) / Pg. 78	F90J SP JIC 37° FEMALE SWIVEL 90° (thrust-wire nut) / Pg. 80	F90J SPLD JIC 37° FEMALE SWIVEL 90° (thrust-wire nut long drop) / Pg. 82	F45J SP JIC 37° FEMALE SWIVEL 45° (thrust-wire nut) / Pg. 83	
JIC 37°	MOB O-RING BOSS MALE / Pg. 85	MOB SW O-RING BOSS MALE SWIVEL / Pg. 86	MOB90 SW O-RING BOSS SWIVEL MALE 90° ELBOW / Pg. 87		
	MJ..SV45 SAE 45° MALE / Pg. 88	FDJ..GIR45 SAE 45° FEMALE SWIVEL (double hexagon) / Pg. 89	F90J..SV45 SAE 45° FEMALE 90° ELBOW / Pg. 90	F45J..SV45 SAE 45° FEMALE 45° ELBOW / Pg. 91	
	SAE				

Visual index


FDK
KOMATSU STYLE
FEMALE SWIVEL
(cone 60°) / Pg. 92




F90K
KOMATSU STYLE
FEMALE SWIVEL 90°
ELBOW / Pg. 93




F45K
KOMATSU STYLE
FEMALE SWIVEL 45°
ELBOW / Pg. 94




FDT
TOYOTA STYLE FEMALE
SWIVEL
(cone 60°) / Pg. 95




F90T
TOYOTA STYLE FEMALE
SWIVEL 90° ELBOW
/ Pg. 96



F45T
TOYOTA STYLE FEMALE
SWIVEL 45° ELBOW
/ Pg. 97




MM
METRIC MALE 60° CONE
/ Pg. 98




FDM
METRIC FEMALE
60° CONE
/ Pg. 100




F90M
METRIC° FEMALE
SWIVEL 90° ELBOW
/ Pg. 102




F45M
METRIC FEMALE
SWIVEL 45° ELBOW
/ Pg. 104




ME L
METRIC MALE 24°
CONE L TYPE / Pg. 106




FE L
METRIC FEMALE 24°
CONE L TYPE / Pg. 108



F90E L
METRIC FEMALE
24° CONE 90° ELBOW L
TYPE / Pg. 110




F45E L
METRIC FEMALE
24° CONE 45° ELBOW
L TYPE / Pg. 112




ME S
METRIC MALE
24° CONE -S TYPE
/ Pg. 114




FE S
METRIC FEMALE
24° CONE -S TYPE
/ Pg. 116



F90E S
METRIC FEMALE
24° CONE 90° ELBOW
S TYPE / Pg. 118




F45E S
METRIC FEMALE
24° CONE 45° ELBOW
S TYPE / Pg. 120




PDL
STANDPIPE
/ Pg. 122




P90L
STANDPIPE 90° ELBOW
/ Pg. 124



P45L
STANDPIPE 40° ELBOW
/ Pg. 125




















MAV
METRIC MALE FOR
AGRICULTURE VALVES
/Pg. 126






















JIS

METRIC/DIN


























Visual index

BANJO	OG BSP BANJO / Pg. 127	OM METRIC BANJO / Pg. 129			
					
METRIC FRENCH	ME F METRIC MALE 24° CONE (french type) / Pg. 131	FE F METRIC FEMALE 24° CONE (french type) / Pg. 132	F90E F METRIC FEMALE 24° CONE 90° (french type) / Pg. 133	F45E F METRIC FEMALE 24° CONE 45° (french type) / Pg. 134	
					
ORFS	PDL F STANDPIPE FRENCH TYPE / Pg. 135				
					
FLANGES	MORFS ORFS MALE / Pg. 136	FORFS ORFS FEMALE / Pg. 137	FORFS GIR ORFS FEMALE (doble exagon) / Pg. 138	F90ORFS ORFS FEMALE SWIVEL 90° ELBOW / Pg. 139	F90ORFS LD ORFS FEMALE SWIVEL 90° ELBOW (long drop) / Pg. 140
					
	F45ORFS ORFS FEMALE SWIVEL 45° ELBOW / Pg. 141				
					
	FDL FLANGE CODE 61 3000 PSI / Pg. 142	F90L FLANGE CODE 61 90° ELBOW 3000 PSI / Pg. 143	F90L LD FLANGE CODE 61 90° ELBOW 3000 PSI LD / Pg. 144	F60L FLANGE CODE 61 60° ELBOW 3000 PSI / Pg. 145	F45L FLANGE CODE 61 45° ELBOW 3000 PSI / Pg. 146
					
	F30L FLANGE CODE 61 30° ELBOW 3000 PSI / Pg. 147	F22.5L FLANGE CODE 61 22.5° ELBOW 3000 PSI / Pg. 148			
					













Visual index

FLANGES	FDP FLANGE CODE 62 6000 PSI / Pg. 149 	F90P FLANGE CODE 62 90° ELBOW 6000 PSI / Pg. 150 	F90P LD FLANGE CODE 62 90° ELBOW 6000 PSI LD / Pg. 151 	F60P FLANGE CODE 62 60° ELBOW 6000 PSI / Pg. 152 	F45P FLANGE CODE 62 45° ELBOW 6000 PSI / Pg. 153 
	F30P FLANGE CODE 62 30° ELBOW 6000 PSI / Pg. 154 	F22.5P FLANGE CODE 62 22.5° ELBOW 6000 PSI / Pg. 155 			
	FDS SUPERCAT FLANGE /Pg. 156 	F90S SUPERCAT FLANGE 90° / Pg. 157 	F90S LD SUPERCAT FLANGE 90° / Pg. 158 	F45S SUPERCAT FLANGE 45° / Pg. 159 	
	FDW T WATERJET CLEANER FEMALE FK TYPE / Pg. 160 	F90W T WATERJET CLEANER FEMALE 90° ELBOW FK TYPE / Pg. 161 	FW D PISTOL WASH CLEANER JUNCTION / Pg.162 		
STAPLE-LOCK	MINE STAPLE-LOCK MALE / Pg. 163 	MINE 90 STAPLE-LOCK MALE / Pg. 164 	MINE 45 STAPLE-LOCK MALE / Pg. 165 		
	GD DOUBLE CONNECTOR / Pg. 166 	CS BRAZING TAIL / Pg. 167 			
OTHERS	FW WHITWORTH CO2 FEMALE / Pg. 168 	MW WHITWORTH CO2 MALE / Pg. 169 			

Visual index

Interlock Ferrules	KB4SH FERRULE FOR 4SH (skive) / Pg. 172		KBH FERRULE FOR R13/R15 (skive) / Pg. 173		
					
Interlock BSP - PSPT	KMG INTERLOCK BSPP MALE / Pg.174	KMGK INTERLOCK BSPT MALE / Pg. 175	KFDG INTERLOCK BSPP FEMALE / Pg.176	KF90G INTERLOCK BSPP FEMALE 90° ELBOW / Pg.177	KF45G INTERLOCK BSPP FEMALE 45° ELBOW / Pg. 178
					
Interlock NPT	KMPTF INTERLOCK MNPTF MALE / Pg. 179				
					
Interlock JIC 37°	KMJ INTERLOCK JIC MALE / Pg. 180	KFDJ INTERLOCK JIC FEMALE / Pg. 181	KF90J INTERLOCK JIC FEMALE 90° ELBOW / Pg. 182	KF90J LD INTERLOCK JIC FEMALE 90° ELBOW (LONG DROP) / Pg. 183	KF45J INTERLOCK JIC FEMALE 45° ELBOW / Pg. 184
					
Interlock DIN	KME S INTERLOCK METRIC MALE 24° CONE-S TYPE / Pg. 185	KFE S INTERLOCK METRIC FEMALE 24° CONE-S TYPE / Pg. 186	KF90E S INTERLOCK METRIC FEMALE 24° CONE-S TYPE - 90° / Pg. 187	KF45E S INTERLOCK METRIC FEMALE 24° CONE-S TYPE - 45° / Pg. 188	
					
Interlock ORFS	KMORFS INTERLOCK ORFS MALE / Pg. 189	KFORFS INTERLOCK ORFS FEMALE / Pg. 190	KF90ORFS INTERLOCK ORFS FEMALE 90° ELBOW / Pg. 191	KF90ORFSLD INTERLOCK ORFS FE- MALE 90° ELBOW / Pg.192	KF45ORFS INTERLOCK ORFS FEMALE 45° ELBOW / Pg.193
					
Interlock Flanges	KFDL INTERLOCK FLANGE CODE 61 3000 PSI / Pg. 194	KF90L INTERLOCK FLANGE CODE 61 90° ELBOW 3000 PSI / Pg. 195	KF90L LD INTERLOCK FLANGE C. 6190° ELBOW 3000 PSI LD / Pg. 196	KF45L INTERLOCK FLANGE CODE 61 45° ELBOW 3000 PSI / Pg. 197	
					

Visual index


Interlock Flanges	KFDP INTERLOCK FLANGE CODE 62 6000 PSI / Pg. 198 	KF90P INTERLOCK FLANGE CODE 62 90° ELBOW 6000 PSI / Pg. 199 	KF90P LD INTERLOCK FLANGE C. 62 90° ELBOW 6000 PSI LD / Pg. 200 	KF45P INTERLOCK FLANGE CODE 62 45° ELBOW 6000 PSI / Pg. 201 
	KFDS INTERLOCK FLANGE SUPERCAT STILE / Pg. 202 	KF90S INTERLOCK FLANGE SU- PERCAT STILE 90° EL- BOW / Pg. 203 	KF90S LD INTERLOCK FLANGE SU- PERCAT STILE 90° EL- BOW / Pg. 204 	KF45S INTERLOCK FLANGE SU- PERCAT STILE 45° EL- BOW / Pg. 205 
Waterblast	WB4 FERRULE WATERBLAST HOSE (4 spiral) / Pg. 208 	WB6 FERRULE WATERBLAST HOSE (6 spiral) / Pg.209 	KMNPTF WB NPTF MALE FOR WATERBLAST HOSE / Pg. 210 	KFE S WB METRIC FEMALE FOR WATERBLAST HOSE / Pg. 211 

Visual index


HB.NS
FERRULE
FOR SPIRAL HOSE
 (no skive) / Pg. 214




HMG
BSPP MALE 60° CONE
 / Pg. 215




HFDG.SP
BSPP FEMALE
 (thrust-wire nut)
 / Pg. 216




HF90G.SP
BSPP FEMALE 90°
ELBOW (thrust-wire nut)
 / Pg. 217




HF45G.SP
BSPP FEMALE 45°
ELBOW (thrust-wire nut)
 / Pg. 218




HMNPTF
NPTF MALE
 / Pg. 219




HMOB
O-RING BOSS MALE
 / Pg. 220




HMJ
JIC 37° MALE
 / Pg. 221




HFDJ SP
JIC 37° FEMALE
 (thrust-wire nut)
 / Pg. 222
























HF90J SP
JIC 37° FEMALE SWIVEL
90° (thrust-wire nut)
 / Pg. 223



HF45J SP
JIC 37° FEMALE SWIVEL
45° (thrust-wire nut)
 / Pg. 224



Visual index

METRIC / DIN	HME.L METRIC MALE 24° CONE L TYPE / Pg. 225 	HFE.L METRIC FEMALE 24° CONE L TYPE / Pg. 226 	HF90E.L METRIC FEMALE 24° CONE 90° ELBOW L TYPE / Pg. 227 	HF45E.L METRIC FEMALE 24° CONE 45° ELBOW L TYPE / Pg. 228 
	HME.S METRIC MALE 24° CONE -S TYPE / Pg. 229 	HFE.S METRIC FEMALE 24° CONE -S TYPE / Pg. 230 	HF90E.S METRIC FEMALE 24° CONE 90° ELBOW S TYPE / Pg. 231 	HF45E.S METRIC FEMALE 24° CONE 45° ELBOW S TYPE / Pg. 232 
	HMORFS ORFS MALE / Pg. 233 			
	HFORFS ORFS FEMALE (doble exagon) / Pg. 234 	HF90ORFS ORFS FEMALE SWIVEL 90° ELBOW / Pg. 235 	HF45ORFS ORFS FEMALE SWIVEL 45° ELBOW / Pg. 236 	
FLANGES	HFDL FLANGE CODE 61 3000 PSI / Pg. 237 	HF90L FLANGE CODE 61 90° ELBOW 3000 PSI / Pg. 238 	HF45L FLANGE CODE 61 45° ELBOW 3000 PSI / Pg. 239 	
	HFDP FLANGE CODE 62 6000 PSI / Pg. 240 	HF90P FLANGE CODE 62 90° ELBOW 6000 PSI / Pg. 241 	HF45P FLANGE CODE 62 45° ELBOW 6000 PSI / Pg. 242 	
	HFDS SUPERCAT FLANGE / Pg. 243 	HF90S SUPERCAT FLANGE 90° ELBOW / Pg. 244 	HF45S SUPERCAT FLANGE 90° ELBOW / Pg. 245 	

Standard


FERRULE FOR 1SN/2SN/2SC

BOCCOLA PER TUBO 1SN/2SN/2SC

JUPE POUR 1SN/2SN/2SC

PRESSHÜLSE 1SN/2SN/2SC

CASQUILLO PARA 1SN/2SN/2SC



No skive - Senza pelatura - Non-dénudable -

Nichtschaelfassung - Sin pelar

IDENTIFICATION: PRINTED CODE OR SCRATCHES

Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
B12T03N	-3	3/16"	4.8		21	23	
B12T04N	-4	1/4"	6.4		23	30	
B12T05N	-5	5/16"	7.9		24	30	
B12T06N	-6	3/8"	9.5		26	32	
B12T08N	-8	1/2"	12.8		29	34	
B12T10N	-10	5/8"	16		33	37	
B12T12N	-12	3/4"	19		37	42	
B12T16N	-16	1"	25.4		46	51	
B12T20N	-20	1.1/4"	31.8		59	59	
B12T24N	-24	1.1/2"	38.1		67	67	
B12T32N	-32	2"	50.8		80	72	


FERRULE FOR 1SC/1SN/2SC

BOCCOLA PER TUBO 1SC/1SN/2SC

JUPE POUR 1SC/1SN/2SC

PRESSHÜLSE 1SC/1SN/2SC

CASQUILLO PARA 1SC/1SN/2SC



No skive - Senza pelatura - Non-dénudable -

Nichtschaelfassung - Sin pelar

IDENTIFICATION: PRINTED CODE OR SCRATCHES

Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
B1SC04	-4	1/4"	6.4		20	30	
B1SC05	-5	5/16"	7.9		22	30	
B1SC06	-6	3/8"	9.5		24	32	
B1SC08	-8	1/2"	12.8		28	34	
B1SC10	-10	5/8"	16		32	37	
B1SC12	-12	3/4"	19		35	42	
B1SC16	-16	1"	25.4		43	51	


FERRULE FOR 1SC-SLIM-R17-R7-R6 1TE/2TE

BOCCOLA PER TUBO 1SC-SLIM-R17-R7-R6 1TE-R6 2TE

JUPE POUR 1SC-SLIM-R17-R7-R6 1TE-R6 2TE

PRESSHÜLSE 1SC-SLIM-R17-R7-R6 1TE-R6 2TE

CASQUILLO PARA 1SC-SLIM-R17-R7-R6 1TE-R6 2TE



No skive - Senza pelatura - Non-dénudable -

Nichtschaelfassung - Sin pelar

IDENTIFICATION: PRINTED CODE OR SCRATCHES


Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
B1K04	-4	1/4"	6.4		18	30	
B1K05	-5	5/16"	7.9		20	30	
B1K06	-6	3/8"	9.5		22	32	
B1K08	-8	1/2"	12.8		26	34	
B1K10	-10	5/8"	16		30	37	
B1K12	-12	3/4"	19		33	42	
B1K16	-16	1"	25.4		41	51	
B1K20	-20	1.1/4"	31.8		48	57	
B1K24	-24	1.1/2"	38.1		56	66	
B1K32	-32	2"	50.8		68	70	

FERRULE FOR 1SN/R1AT

BOCCOLA PER TUBO 1SN/R1AT
 JUPE POUR 1SN/R1AT
 PRESSHÜLSE 1SN/R1AT
 CASQUILLO PARA 1SN/R1AT




No skive - Senza pelatura - Non-dénudable -
 Nichtschaelfassung - Sin pelar



Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
B1T03	-3	3/16"	4.8		19	26	
B1T04	-4	1/4"	6.4		20	30	
B1T05	-5	5/16"	7.9		22	30.5	
B1T06	-6	3/8"	9.5		24	32	
B1T08	-8	1/2"	12.8		29	34	
B1T10	-10	5/8"	16		32	37	
B1T12	-12	3/4"	19		36	42.5	
B1T16	-16	1"	25.4		43	50.5	
B1T20	-20	1.1/4"	31.8		53	59	
B1T24	-24	1.1/2"	38.1		60	63	

FERRULE FOR 2SN/R2AT

BOCCOLA PER TUBO 2SN/R2AT
 JUPE POUR 2SN/R2AT
 PRESSHÜLSE 2SN/R2AT
 CASQUILLO PARA 2SN/R2AT



No skive - Senza pelatura - Non-dénudable -
 Nichtschaelfassung - Sin pelar

IDENTIFICATION: PRINTED CODE OR SCRATCHES

Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
	Inch	mm	mm		mm	mm	
B2T03	-3	3/16"	4.8		20	26	
B2T04	-4	1/4"	6.4		22	30	
B2T05	-5	5/16"	7.9		24	30.5	
B2T06	-6	3/8"	9.5		25.5	31.5	
B2T08	-8	1/2"	12.8		30	34	
B2T10	-10	5/8"	16		34	37	
B2T12	-12	3/4"	19		38	42.5	
B2T16	-16	1"	25.4		46	50	
B2T20	-20	1.1/4"	31.8		56	59	
B2T24	-24	1.1/2"	38.1		64	63	

FERRULE FOR 1ST/R1A

BOCCOLA PER TUBO 1ST/R1A

JUPE POUR 1ST/R1A


PRESSHÜLSE 1ST/R1A

CASQUILLO PARA 1ST/R1A

Skive - A pelare - Dénudable -

Schäelfassung - A pelar

IDENTIFICATION: PRINTED CODE OR SCRATCHES



Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
B1R03	-3	3/16"	4.8		17	26.5	
B1R04	-4	1/4"	6.4		20	29.5	
B1R05	-5	5/16"	7.9		22	29.5	
B1R06	-6	3/8"	9.5		24	32	
B1R08	-8	1/2"	12.8		29	34	
B1R10	-10	5/8"	16		32	37	
B1R12	-12	3/4"	19		36	43	
B1R16	-16	1"	25.4		43	50	
B1R20	-20	1.1/4"	31.8		52	57	
B1R24	-24	1.1/2"	38.1		57	63	
B1R32	-32	2"	50.8		70	78	

FERRULE FOR 2ST/R2A

BOCCOLA PER TUBO 2ST/R2A

JUPE POUR 2ST/R2A


PRESSHÜLSE 2ST/R2A

CASQUILLO PARA 12ST/R2A

Skive - A pelare - Dénudable -

Schweifassung - A pelar


IDENTIFICATION: PRINTED CODE OR SCRATCHES



Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
B2R03	-3	3/16"	4.8		20	27	
B2R04	-4	1/4"	6.4		22	30	
B2R05	-5	5/16"	7.9		24	30	
B2R06	-6	3/8"	9.5		26	32	
B2R08	-8	1/2"	12.8		30	34	
B2R10	-10	5/8"	16		34	37	
B2R12	-12	3/4"	19		38	43	
B2R16	-16	1"	25.4		46	50	
B2R20	-20	1.1/4"	31.8		56	59	
B2R24	-24	1.1/2"	38.1		62	63	
B2R32	-32	2"	50.8		75	79	

FERRULE FOR R3-R4

BOCCOLA PER TUBO R3/R4
 JUPE POUR R3/R4
 PRESSHÜLSE R3/R4
 CASQUILLO PARA R3/R4



No skive - Senza pelatura - Non-dénudable -
 Nichtschaelfassung - Sin pelar

IDENTIFICATION: PRINTED CODE OR SCRATCHES

Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
B3R04	-4	1/4"	6.4		19	29	
B3R05	-5	5/16"	7.9		22	30	
B3R06	-6	3/8"	9.5		24	31	
B3R08	-8	1/2"	12.8		28.5	34	
B3R10	-10	5/8"	16		32	36	
B3R12	-12	3/4"	19		38	42	
B3R16	-16	1"	25.4		46	50	
B3R20	-20	1.1/4"	31.8		52	57	

FERRULE FOR R9R-4SP

BOCCOLA PER TUBO R9R-4SP


JUPE POUR R9R-4SP

PRESSHÜLSE R9R-4SP

CASQUILLO PARA R9R-4SP

Skive - A pelare - Dénudable -

Schweifassung - A pelar



IDENTIFICATION: PRINTED CODE OR SCRATCHES


Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
B9R04	-4	1/4"	6.4		22	30	
B9R06	-6	3/8"	9.5		26	32	
B9R08	-8	1/2"	12.8		30	34	
B9R10	-10	5/8"	16		34	40	
B9R12	-12	3/4"	19		38	45.2	
B9R16	-16	1"	25.4		46	56	
B9R20	-20	1.1/4"	31.8		59	66	
B9R24	-24	1.1/2"	38.1		65	76.5	
B9R32	-32	2"	50.8		80	80	

FERRULE FOR 4SH (skive)

BOCCOLA PER TUBO 4SH
JUPE POUR 4SH
PRESSHÜLSE 4SH
CASQUILLO PARA 4SH

Skive - A pelare - Dénudable -
Schaelfassung - A pelar

IDENTIFICATION: PRINTED CODE OR SCRATCHES



Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
B4SH20	-20	1.1/4"	31.8		52	66	
B4SH24	-24	1.1/2"	38.1		62	76.5	
B4SH32	-32	2"	50.8		75	80	


FERRULE FOR R7/MTH 1/R6

BOCCOLA PER TUBO R7/MTH1/R6

JUPE POUR R7/MTH1/R6

PRESSHÜLSE R7/MTH1/R6

CASQUILLO PARA R7/MTH1/R6



No skive - Senza pelatura - Non-dénudable -

Nichtschaelfassung - Sin pelar

IDENTIFICATION: PRINTED CODE OR SCRATCHES

Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
B7R03	-3	3/16"	4.8		14	30	
B7R04	-4	1/4"	6.4		17	30	
B7R05	-5	5/16"	7.9		19	30	
B7R06	-6	3/8"	9.5		21	30	
B7R08	-8	1/2"	12.8		25.5	34	
B7R10	-10	5/8"	16		28.5	36	
B7R12	-12	3/4"	19		32	42	
B7R16	-16	1"	25.4		40	50	


FERRULE FOR PTFE

BOCCOLA PER TUBO PTFE


JUPE POUR PTFE

PRESSHÜLSE PTFE

CASQUILLO PARA PTFE




* version with grooves
versione scanalata



	Code	Tube			Thread	Dimensions		Pressure
		D.N.	Hose	Diam		D	L	
			Inch	mm		mm	mm	
*	BPTFE03	-3	3/16"	4.8		14	25	
	BPTFE04	-4	1/4"	6.4		16	26.5	
*	BPTFE05	-5	5/16"	7.9		17	25	
	BPTFE06	-6	3/8"	9.5		19	30	
	BPTFE08	-8	1/2"	12.8		24	32	
	BPTFE10	-10	5/8"	16		25.5	34	
	BPTFE12	-12	3/4"	19		30.5	40	
	BPTFE16	-16	1"	25.4		37	47	

FERRULE FOR PTFE CORRUGATED


BOCCOLA PER TUBO PTFE CORRUGATA
 JUPE POUR PTFE ONDULÉ
 PRESSHÜLSE PTFE GEWELLT
 CASQUILLO PARA PTFE CORRUGADO



Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
BPTFEC04	-4	1/4"	6.4		17.8	26.5	
BPTFEC06	-6	3/8"	9.5		20	30.5	
BPTFEC08	-8	1/2"	12.8		24	33	
BPTFEC10	-10	5/8"	16		29	31	
BPTFEC12	-12	3/4"	19		31.1	41	
BPTFEC16	-16	1"	25.4		38	47	
BPTFEC20	-20	1.1/4"	31.8		49.5	53	
BPTFEC24	-24	1.1/2"	38.1		55.3	58.5	
BPTFEC32	-32	2"	50.8		69	72	

FERRULE FOR 4SP/4SH/R12/ ELASTIK4000/ELASTIK5000

BOCCOLA PER TUBO 4SP/4SH/R12/ELASTIK 4000 / 5000
 JUPE POUR 4SP/4SH/R12 ELASTIK 4000 / 5000
 PRESSHÜLSE 4SP/4SH/R12 ELASTIK 4000 / 5000
 CASQUILLO PARA 4SP/4SH/R12 ELASTIK 4000 / 5000




No skive - Senza pelatura - Non-dénudable -
 Nichtschaelfassung - Sin pelar

IDENTIFICATION: PRINTED CODE OR SCRATCHES

Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
B5K06	-6	3/8"	9.5		33	33	
B5K08	-8	1/2"	12.8		35.5	36	
B5K10	-10	5/8"	16		40.5	40	
B5K12	-12	3/4"	19		43.5	44	
B5K16	-16	1"	25.4		51	54.4	
B5K204	-20	1.1/4"	31.8		62.5	63.5	
B5K206	-20	1.1/4"	31.8		66.5	63.8	

FERRULE FOR 1TE/R6

BOCCOLA PER TUBO 1TE/R6
JUPE POUR 1TE/R6
PRESSHÜLSE 1TE/R6
CASQUILLO PARA 1TE/R6




No skive - Senza pelatura - Non-dénudable -
Nichtschaelfassung - Sin pelar

IDENTIFICATION: PRINTED CODE OR SCRATCHES

Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
B6R03	-3	3/16"	4.8		14	30	

BSPP MALE - 60° CONE (1)

MASCHIO BSPP SV 60°
 MÂLE BSPP CÔNE 60°
 AGR 60° INNENKONUS (BSPP GEWINDE)
 MACHO FIJO BSPP CONO 60°

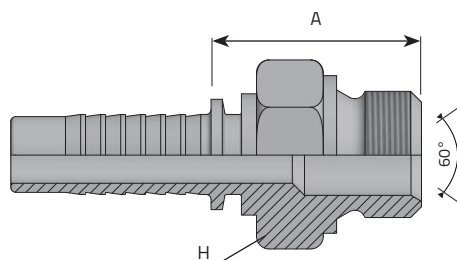

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	Inch		mm	mm		
MG0302	-3	3/16"	4.8	1/8"	28	14	20.5	350	5076
MG0304	-3	3/16"	4.8	1/4"	19	19	26	415	6019
MG0402	-4	1/4"	6.4	1/8"	28	14	20.5	350	5076
MG0404	-4	1/4"	6.4	1/4"	19	19	27	450	6526
MG0406	-4	1/4"	6.4	3/8"	19	22	29	450	6526
MG0408	-4	1/4"	6.4	1/2"	14	27	32	450	6526
MG0504	-5	5/16"	7.9	1/4"	19	19	27	350	5076
MG0506	-5	5/16"	7.9	3/8"	19	22	29	350	5076
MG0508	-5	5/16"	7.9	1/2"	14	27	32	350	5076
MG0604	-6	3/8"	9.5	1/4"	19	19	27	450	6526
MG0606	-6	3/8"	9.5	3/8"	19	22	29	450	6526
MG0608	-6	3/8"	9.5	1/2"	14	27	32	450	6526
MG0806	-8	1/2"	12.8	3/8"	19	22	29	415	6019
MG0808	-8	1/2"	12.8	1/2"	14	27	33	415	6019
MG0810	-8	1/2"	12.8	5/8"	14	30	34.5	415	6019
MG0812	-8	1/2"	12.8	3/4"	14	32	36	415	6019
MG1008	-10	5/8"	16	1/2"	14	27	33	350	5076
MG1010	-10	5/8"	16	5/8"	14	30	34.5	350	5076


BSPP MALE - 60° CONE (2)

MASCHIO BSPP SV 60°

MÂLE BSPP CÔNE 60°

AGR 60° INNENKONUS (BSPP GEWINDE)


MACHO FIJO BSPP CONO 60°

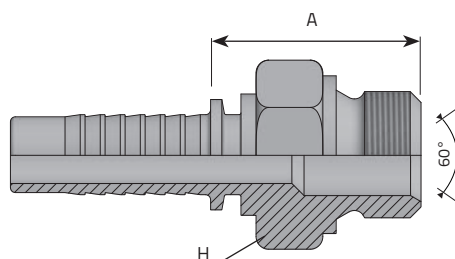

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
	Inch		mm	Inch		mm	mm		
MG1012	-10	5/8"	16	3/4"	14	32	36	350	5076
MG1016	-10	5/8"	16	1"	11	38	40	350	5076
MG1208	-12	3/4"	19	1/2"	14	27	34	350	5076
MG1210	-12	3/4"	19	5/8"	14	30	36	350	5076
MG1212	-12	3/4"	19	3/4"	14	32	37	350	5076
MG1216	-12	3/4"	19	1"	11	38	40	350	5076
MG1612	-16	1"	25.4	3/4"	14	32	38	280	4061
MG1616	-16	1"	25.4	1"	11	38	40	280	4061
MG1620	-16	1"	25.4	1.1/4"	11	50	45	280	4061
MG2020	-20	1.1/4"	31.8	1.1/4"	11	50	46	210	3046
MG2024	-20	1.1/4"	31.8	1.1/2"	11	55	46	210	3046
MG2424	-24	1.1/2"	38.1	1.1/2"	11	55	46	185	2683
MG2432	-24	1.1/2"	38.1	2"	11	70	53	185	2683
MG3232	-32	2"	50.8	2"	11	70	54	165	2393

BSPP SWIVEL MALE - 90° ELBOW (COMPACT FORGED)


MASCHIO COMPATTO 90° BSPP GIREVOLE
 MALE 90° BSPP COMPACT
 AGR BSPP 90° KOMPAKT DREHBAR
 MACHO BSPP GIRATORIO A 90° COMPACTO



Code	Tube			Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm	mm		
M90G0404SW	-4	1/4"	6.4	1/4"	19	14	19	45.7	54	350	5076
M90G0606SW	-6	3/8"	9.5	3/8"	19	19	22	57.2	62	350	5076
M90G0808SW	-8	1/2"	12.8	1/2"	14	22	27	64.1	67	350	5076

BSPT TAPERED MALE


MASCHIO BSPT SV 60°
 MÂLE BSPT CÔNE 60°
 AGR-K KONISCH (BSPT)
 MACHO BSPT CONO 60°

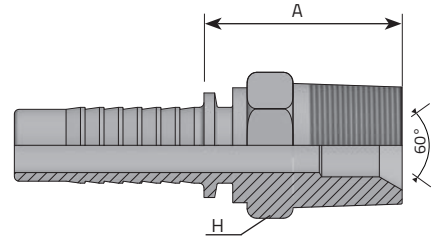

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm		
MGK0302	-3	3/16"	4.8	1/8"	28	12	22	350	5076
MGK0304	-3	3/16"	4.8	1/4"	19	15	22	415	6019
MGK0402	-4	1/4"	6.4	1/8"	28	12	22.5	350	5076
MGK0404	-4	1/4"	6.4	1/4"	19	15	27	450	6526
MGK0406	-4	1/4"	6.4	3/8"	19	19	28	450	6526
MGK0504	-5	5/16"	7.9	1/4"	19	15	27	350	5076
MGK0506	-5	5/16"	7.9	3/8"	19	19	28	350	5076
MGK0604	-6	3/8"	9.5	1/4"	19	15	28	450	6526
MGK0606	-6	3/8"	9.5	3/8"	19	19	28	450	6526
MGK0608	-6	3/8"	9.5	1/2"	14	22	34	415	6019
MGK0806	-8	1/2"	12.8	3/8"	19	19	28	415	6019
MGK0808	-8	1/2"	12.8	1/2"	14	22	34.5	415	6019
MGK1008	-10	5/8"	16	1/2"	14	24	34.5	350	5076
MGK1012	-10	5/8"	16	3/4"	14	27	36.5	350	5076
MGK1212	-12	3/4"	19	3/4"	14	27	37	350	5076
MGK1216	-12	3/4"	19	1"	11	36	45	280	4061
MGK1616	-16	1"	25.4	1"	11	36	46	280	4061
MGK1620	-16	1"	25.4	1.1/4"	11	46	45.5	210	3046
MGK2020	-20	1.1/4"	31.8	1.1/4"	11	46	46	210	3046
MGK2024	-20	1.1/4"	31.8	1.1/2"	11	50	47	185	2683
MGK2424	-24	1.1/2"	38.1	1.1/2"	11	50	47.3	185	2683
MGK3232	-32	2"	50.8	2"	11	65	57	165	2393

BSPP FEMALE - 60° CONE (1)


FEMMINA BSPP SV 60°
 FEMELLE DROITE BSPP CÔNE 60°
 DKR 60° KONUS (BSPP-GEWINDE)
 HEMBRA GIRATORIA RECTA BSPP CONO 60°

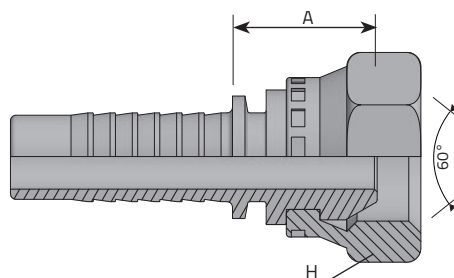

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
		Inch	mm	Inch		mm	mm			
FDG0302	-3	3/16"	4.8	1/8"	28	15	18		350	5076
FDG0304	-3	3/16"	4.8	1/4"	19	19	18		415	6019
FDG0402	-4	1/4"	6.4	1/8"	28	15	18		350	5076
FDG0404	-4	1/4"	6.4	1/4"	19	19	18		450	6526
FDG0406	-4	1/4"	6.4	3/8"	19	22	19		450	6526
FDG0408	-4	1/4"	6.4	1/2"	14	27	21		450	6526
FDG0504	-5	5/16"	7.9	1/4"	19	19	18		350	5076
FDG0506	-5	5/16"	7.9	3/8"	19	22	19		350	5076
FDG0508	-5	5/16"	7.9	1/2"	14	27	21		350	5076
FDG0604	-6	3/8"	9.5	1/4"	19	19	19		450	6526
FDG0606	-6	3/8"	9.5	3/8"	19	22	20		450	6526
FDG0608	-6	3/8"	9.5	1/2"	14	27	21		450	6526
FDG0806	-8	1/2"	12.8	3/8"	19	19	20		415	6019
FDG0808	-8	1/2"	12.8	1/2"	14	27	22		415	6019
FDG0810	-8	1/2"	12.8	5/8"	14	28	22		415	6019
FDG0812	-8	1/2"	12.8	3/4"	14	32	24		415	6019
FDG1008	-10	5/8"	16	1/2"	14	27	22		350	5076
FDG1010	-10	5/8"	16	5/8"	14	28	23		350	5076

BSPP FEMALE - 60° CONE (2)


FEMMINA BSPP SV 60°
FEMELLE DROITE BSPP CÔNE 60°
DKR 60° KONUS (BSPP-GEWINDE)
HEMBRA GIRATORIA RECTA BSPP CONO 60°

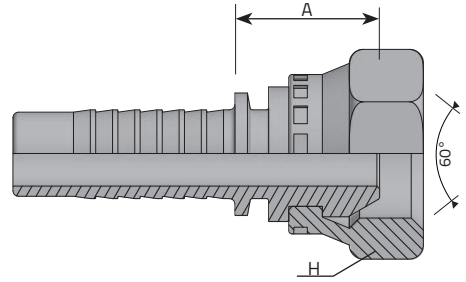

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	Inch		mm	mm		
FDG1012	-10	5/8"	16	3/4"	14	32	24	350	5076
FDG1208	-12	3/4"	19	1/2"	14	27	22.5	350	5076
FDG1210	-12	3/4"	19	5/8"	14	28	24	350	5076
FDG1212	-12	3/4"	19	3/4"	14	32	25	350	5076
FDG1216	-12	3/4"	19	1"	11	38	26	350	5076
FDG1612	-16	1"	25.4	3/4"	14	32	26	280	4061
FDG1616	-16	1"	25.4	1"	11	38	27	280	4061
FDG1620	-16	1"	25.4	1.1/4"	11	50	30	280	4061
FDG2020	-20	1.1/4"	31.8	1.1/4"	11	50	30	210	3046
FDG2024	-20	1.1/4"	31.8	1.1/2"	11	55	32	210	3046
FDG2424	-24	1.1/2"	38.1	1.1/2"	11	55	32	185	2683

BSPP FEMALE - 60° CONE - 90° ELBOW (1)


FEMMINA 90° BSPP SV 60°
 FEMELLE 90° BSPP CÔNE 60°
 DKR 90° BOGEN 60° KONUS (BSPP-GEWINDE)
 HEMBRA GIRATORIA A 90° BSPP - CONO 60°

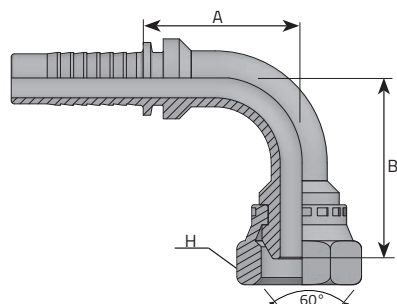

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm	mm		
F90G0302	-3	3/16"	4.8	1/8"	28	15	29	23	350	5076
F90G0304	-3	3/16"	4.8	1/4"	19	19	29	23	415	6019
F90G0402	-4	1/4"	6.4	1/8"	28	15	29	23	350	5076
F90G0404	-4	1/4"	6.4	1/4"	19	19	29	23	450	6526
F90G0406	-4	1/4"	6.4	3/8"	19	22	32	23	450	6526
F90G0408	-4	1/4"	6.4	1/2"	14	27	30	31.5	450	6526
F90G0504	-5	5/16"	7.9	1/4"	19	19	33.5	31.5	350	5076
F90G0506	-5	5/16"	7.9	3/8"	19	22	35.5	31.5	350	5076
F90G0508	-5	5/16"	7.9	1/2"	14	27	39	31.5	350	5076
F90G0604	-6	3/8"	9.5	1/4"	19	19	37	33	450	6526
F90G0606	-6	3/8"	9.5	3/8"	19	22	38	33	450	6526
F90G0608	-6	3/8"	9.5	1/2"	14	27	42	33	450	6526
F90G0806	-8	1/2"	12.8	3/8"	19	22	43	39	415	6019
F90G0808	-8	1/2"	12.8	1/2"	14	27	45	39	415	6019
F90G0810	-8	1/2"	12.8	5/8"	14	28	45	39	415	6019
F90G0812	-8	1/2"	12.8	3/4"	14	32	51	39	415	6019
F90G1008	-10	5/8"	16	1/2"	14	27	54	49	350	5076
F90G1010	-10	5/8"	16	5/8"	14	28	54	49	350	5076

BSPP FEMALE - 60° CONE - 90° ELBOW (2)


FEMMINA 90° BSPP SV 60°
 FEMELLE 90° BSPP CÔNE 60°
 DKR 90° BOGEN 60° KONUS (BSPP-GEWINDE)
 HEMBRA GIRATORIA A 90° BSPP - CONO 60°

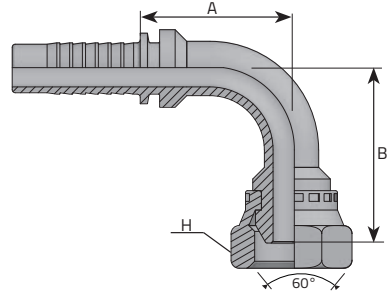

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F90G1012	-10	5/8"	16	3/4"	14	32	56	49	350	5076
F90G1208	-12	3/4"	19	1/2"	14	27	56	53.5	350	5076
F90G1210	-12	3/4"	19	5/8"	14	28	56	53.5	350	5076
F90G1212	-12	3/4"	19	3/4"	14	32	59	53.5	350	5076
F90G1216	-12	3/4"	19	1"	11	38	65	53.5	350	5076
F90G1612	-16	1"	25.4	3/4"	14	32	72	68.5	280	4061
F90G1616	-16	1"	25.4	1"	11	38	72	73	280	4061
F90G1620	-16	1"	25.4	1.1/4"	11	50	80	73	280	4061
F90G2020	-20	1.1/4"	31.8	1.1/4"	11	50	93	89	210	3046
F90G2024	-20	1.1/4"	31.8	1.1/2"	11	55	98.5	89	210	3046
F90G2424	-24	1.1/2"	38.1	1.1/2"	11	55	114	101	185	2683

BSPP FEMALE - 90° ELBOW (COMPACT FORGED)

FEMMINA 90° BSPP SV 60° COMPATTA
 FEMELLE 90° BSPP COMPACTE CÔNE 60°
 DKR 90° KOMPAKT
 HEMBRA GIRATORIA A 90° BSPP COMPACTA

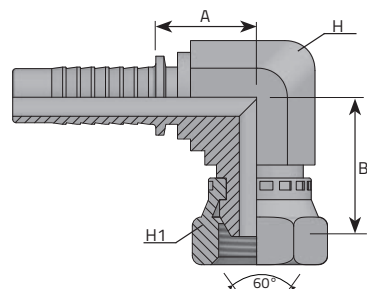

Code	Tube			Thread		Dimensions					Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	B	A		Bar	Psi
		Inch	mm	Inch		mm	mm	mm	mm			
F90G0404K	-4	1/4"	6.4	1/4"	19	14	19	26.7	19		450	6526
F90G0406K	-4	1/4"	6.4	3/8"	19	19	22	28	21.5		450	6526
F90G0506K	-5	5/16"	7.9	3/8"	19	19	22	28	21.5		350	5076
F90G0606K	-6	3/8"	9.5	3/8"	19	19	22	28	21.5		450	6526
F90G0608K	-6	3/8"	9.5	1/2"	14	22	27	32.5	24		450	6526
F90G0808K	-8	1/2"	12.8	1/2"	14	22	27	32.5	24		415	6019
F90G1212K	-12	3/4"	19	3/4"	14	27	32	39.5	25		350	5076
F90G1616K	-16	1"	25.4	1"	11	33	38	43.5	32.5		280	4061


BSPP FEMALE - 60° CONE - 45° ELBOW (1)

FEMMINA 45° BSPP SV 60°

FEMELLE 45° BSPP CÔNE 60°

DKR 45° BOGEN 60° KONUS (BSPP-GEWINDE)


HEMBRA GIRATORIA A 45° BSPP - CONO 60°

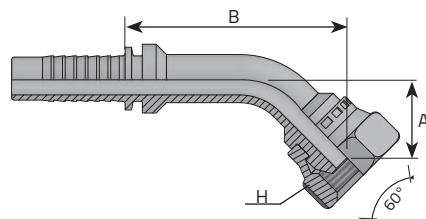

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	B	Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm	mm		
F45G0302	-3	3/16"	4.8	1/8"	28	15	17	40	350	5076
F45G0304	-3	3/16"	4.8	1/4"	19	19	17	40	415	6019
F45G0402	-4	1/4"	6.4	1/8"	28	15	17	40	350	5076
F45G0404	-4	1/4"	6.4	1/4"	19	19	17	40	450	6526
F45G0406	-4	1/4"	6.4	3/8"	19	22	20	43	450	6526
F45G0408	-4	1/4"	6.4	1/2"	14	27	24	55	450	6526
F45G0504	-5	5/16"	7.9	1/4"	19	19	20	51	350	5076
F45G0506	-5	5/16"	7.9	3/8"	19	22	21	52	350	5076
F45G0508	-5	5/16"	7.9	1/2"	14	27	24	55	350	5076
F45G0604	-6	3/8"	9.5	1/4"	19	19	19	54	450	6526
F45G0606	-6	3/8"	9.5	3/8"	19	22	20	55	450	6526
F45G0608	-6	3/8"	9.5	1/2"	14	27	23	58	450	6526
F45G0806	-8	1/2"	12.8	3/8"	19	22	20	63	415	6019
F45G0808	-8	1/2"	12.8	1/2"	14	27	23	65	415	6019
F45G0810	-8	1/2"	12.8	5/8"	14	28	23	65	415	6019
F45G0812	-8	1/2"	12.8	3/4"	14	32	21	66	415	6019
F45G1008	-10	5/8"	16	1/2"	14	27	25	63	350	5076
F45G1010	-10	5/8"	16	5/8"	14	28	25	64	350	5076

BSPP FEMALE - 60° CONE - 45° ELBOW (2)


FEMMINA 45° BSPP SV 60°
 FEMELLE 45° BSPP CÔNE 60°
 DKR 45° BOGEN 60° KONUS (BSPP-GEWINDE)
 HEMBRA BSPP CODO 45° ASIENTO 60°

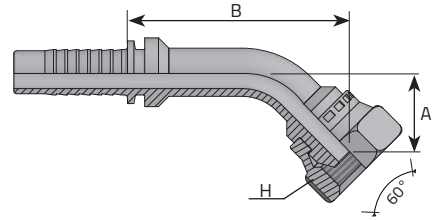

Code	Tube			Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	B		Bar	Psi
		Inch	mm	Inch		mm	mm	mm			
F45G1012	-10	5/8"	16	3/4"	14	32	26	64		350	5076
F45G1208	-12	3/4"	19	1/2"	14	27	28	62		350	5076
F45G1210	-12	3/4"	19	5/8"	14	28	29	63		350	5076
F45G1212	-12	3/4"	19	3/4"	14	32	29	63		350	5076
F45G1216	-12	3/4"	19	1"	11	38	31	65		350	5076
F45G1612	-16	1"	25.4	3/4"	14	32	39	88		280	4061
F45G1616	-16	1"	25.4	1"	11	38	41	90		280	4061
F45G1620	-16	1"	25.4	1.1/4"	11	50	44	93		280	4061
F45G2020	-20	1.1/4"	31.8	1.1/4"	11	50	44	102		210	3046
F45G2024	-20	1.1/4"	31.8	1.1/2"	11	55	45	103		210	3046
F45G2424	-24	1.1/2"	38.1	1.1/2"	11	55	45	118		185	2683

BSPP FEMALE (SLIP-ON NUT)


FEMMINA BSPP SV 60° (DADO LIBERO)
 FEMELLE DROIT BSPP CÔNE 60° (ÉCROU LIBRE)
 DKR 60° KONUS (BSPP-GEWINDE) + ÜBERWURFMUTTER
 HEMBRA GIRATORIA RECTA BSPP CONO 60° (TUERCA LIBRE)

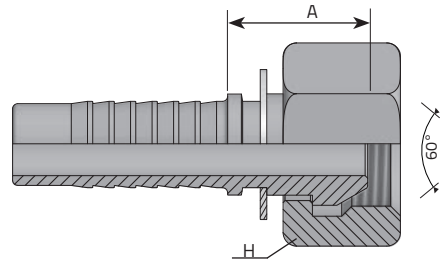

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
	Inch		mm	Inch		mm	mm		
FDG0304SF	-3	3/16"	4.8	1/4"	19	19	18	415	6019
FDG0404SF	-4	1/4"	6.4	1/4"	19	19	18	450	6526
FDG0406SF	-4	1/4"	6.4	3/8"	19	22	19	450	6526
FDG0506SF	-5	5/16"	7.9	3/8"	19	22	19	350	5076
FDG0606SF	-6	3/8"	9.5	3/8"	19	22	20	450	6526
FDG0608SF	-6	3/8"	9.5	1/2"	14	27	21	450	6526
FDG0808SF	-8	1/2"	12.8	1/2"	14	27	22	415	6019

BSPP FEMALE - 90° ELBOW (SLIP-ON NUT)


FEMMINA BSPP SV 60° (DADO LIBERO)
 FEMELLE 90° BSPP CÔNE 60° (ÉCROU LIBRE)
 DKR 90° BOGEN 60° KONUS (BSPP- GEWINDE) + ÜBERWURFMUTTER
 HEMBRA GIRATORIA A 90° BSPP CONO 60° (TUERCA LIBRE)

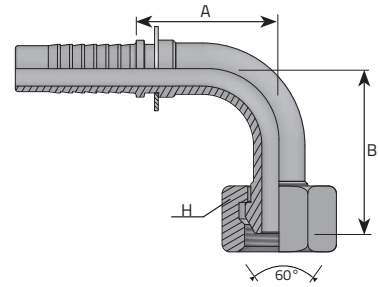

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F90G0304SF	-3	3/16"	4.8	1/4"	19	19	29	23	415	6019
F90G0404SF	-4	1/4"	6.4	1/4"	19	19	29	23	450	6526
F90G0406SF	-4	1/4"	6.4	3/8"	19	22	32	23	450	6526
F90G0506SF	-5	5/16"	7.9	3/8"	19	22	35.5	31.5	350	5076
F90G0606SF	-6	3/8"	9.5	3/8"	19	22	38	33	450	6526
F90G0608SF	-6	3/8"	9.5	1/2"	14	27	42	33	450	6526
F90G0808SF	-8	1/2"	12.8	1/2"	14	27	45	39	415	6019

BSPP FEMALE 45° ELBOW (SLIP-ON NUT)


FEMMINA 45° BSPP SV 60° DADO LIBERO
 FEMELLE 45° BSPP CÔNE 60° (ÉCROU LIBRE)
 DKR 45° BOGEN 60° KONUS (BSPP- GEWINDE) + ÜBERWURFMUTTER
 HEMBRA GIRATORIA A 45° BSPP CONO 60° (TUERCA LIBRE)

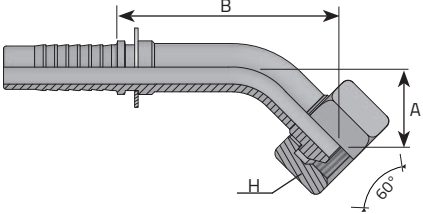

Code	Tube			Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	B		Bar	Psi
		Inch	mm	Inch		mm	mm	mm			
F45G0304SF	-3	3/16"	4.8	1/4"	19	19	17	40		415	6019
F45G0404SF	-4	1/4"	6.4	1/4"	19	19	17	40		450	6526
F45G0406SF	-4	1/4"	6.4	3/8"	19	22	20	43		450	6526
F45G0506SF	-5	5/16"	7.9	3/8"	19	22	21	52		350	5076
F45G0606SF	-6	3/8"	9.5	3/8"	19	22	20	55		450	6526
F45G0608SF	-6	3/8"	9.5	1/2"	14	27	23	58		450	6526
F45G0808SF	-8	1/2"	12.8	1/2"	14	27	23	65		415	6019

BSPP FEMALE (O - RING - SLIP - ON NUT)

FEMMINA BSPP SV 60° (DADO LIBERO E O-RING)
 FEMELLE DROIT BSPP CÔNE 60° (ÉCROU LIBRE AVEC O-RING)
 DKR 60° KONUS (BSPP-GEWINDE) + ÜBERWURFMUTTER + O-RING
 HEMBRA GIRATORIA RECTA BSPP CONO 60° (TUERCA LIBRE - JUNTA TORICA)

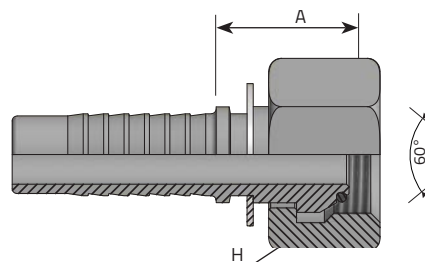

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
	Inch		mm	Inch		mm	mm		
FDG0404SF-OR	-4	1/4"	6.4	1/4"	19	19	18	450	6526
FDG0406SF-OR	-4	1/4"	6.4	3/8"	19	22	19	450	6526
FDG0506SF-OR	-5	5/16"	7.9	3/8"	19	22	19	350	5076
FDG0606SF-OR	-6	3/8"	9.5	3/8"	19	22	20	450	6526
FDG0608SF-OR	-6	3/8"	9.5	1/2"	14	27	21	450	6526
FDG0808SF-OR	-8	1/2"	12.8	1/2"	14	27	22	415	6019


BSPP FEMALE - 90° ELBOW (O - RING - SLIP - ON NUT)

FEMMINA BSPP SV 60° (DADO LIBERO E O-RING)

FEMELLE 90° BSPP CÔNE 60° (ÉCROU LIBRE AVEC O-RING)

DKR 90° BOGEN 60° KONUS (BSPP- GEWINDE) + ÜBERWURFMUTTER + O-RING

HEMBRA GIRATORIA A 90° BSPP CONO 60° (TUERCA LIBRE - JUNTA TORICA)

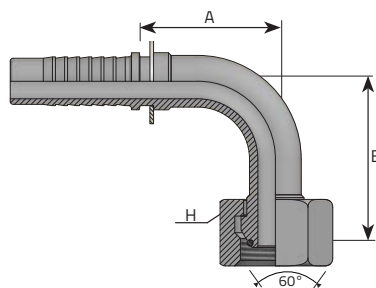

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm	mm		
F90G0404SF-OR	-4	1/4"	6.4	1/4"	19	19	29	23	450	6526
F90G0406SF-OR	-4	1/4"	6.4	3/8"	19	22	32	23	450	6526
F90G0506SF-OR	-5	5/16"	7.9	3/8"	19	22	35.5	31.5	350	5076
F90G0606SF-OR	-6	3/8"	9.5	3/8"	19	22	38	33	450	6526
F90G0608SF-OR	-6	3/8"	9.5	1/2"	14	27	42	33	450	6526
F90G0808SF-OR	-8	1/2"	12.8	1/2"	14	27	45	39	415	6019


BSPP FEMALE 45° ELBOW (O - RING - SLIP - ON NUT)

FEMMINA 45° BSPP SV 60° (DADO LIBERO E O-RING)

FEMELLE 45° BSPP CÔNE 60° (ÉCROU LIBRE AVEC O-RING)

DKR 45° BOGEN 60° KONUS (BSPP- GEWINDE) + ÜBERWURFMUTTER + O-RING

HEMBRA GIRATORIA A 45° BSPP CONO 60° (TUERCA LIBRE - JUNTA TORICA)

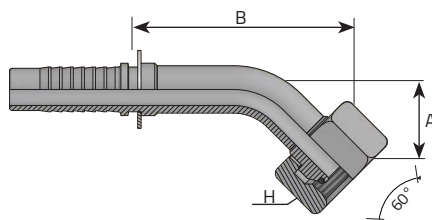


Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	B	Bar	Psi
	Inch		mm	Inch		mm	mm	mm		
F45G0404SF-OR	-4	1/4"	6.4	1/4"	19	19	17	40	450	6526
F45G0406SF-OR	-4	1/4"	6.4	3/8"	19	22	20	43	450	6526
F45G0506SF-OR	-5	5/16"	7.9	3/8"	19	22	21	52	350	5076
F45G0606SF-OR	-6	3/8"	9.5	3/8"	19	22	20	55	450	6526
F45G0608SF-OR	-6	3/8"	9.5	1/2"	14	27	23	58	450	6526
F45G0808SF-OR	-8	1/2"	12.8	1/2"	14	27	23	65	415	6019

BSPP FEMALE (THRUST-WIRE NUT) (1)

FEMMINA DIRITTA BSPP SV 60° DADO SPINATO CON O-RING
 FEMELLE DROITE BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 60° KONUS MIT O-RING (BSPP- GEWINDE) + GESTIFTETE
 ÜBERWURFMUTTER
 HEMBRA GIRATORIA RECTA BSPP CON O-RING CONO 60° (TUERCA CON
 SEGURO)

* : without o-ring / senza o-ring

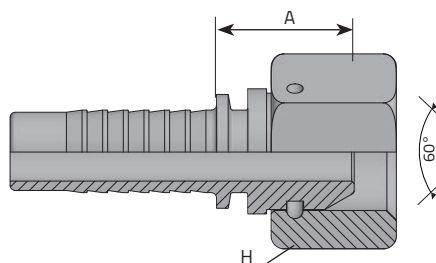


	Code	Tube			Thread		Dimensions		Pressure	
		D.N.	Hose	Diam	T	t/1"	H	A		
		Inch		mm	Inch		mm	mm	Bar	Psi
*	FDG0302SP	-3	3/16"	4.8	1/8"	28	14	18	350	5076
*	FDG0304SP	-3	3/16"	4.8	1/4"	19	19	18	415	6019
*	FDG0402SP	-4	1/4"	6.4	1/8"	28	14	18	350	5076
*	FDG0404SP	-4	1/4"	6.4	1/4"	19	19	18	450	6526
*	FDG0406SP	-4	1/4"	6.4	3/8"	19	22	19	450	6526
*	FDG0408SP	-4	1/4"	6.4	1/2"	14	27	21	450	6526
*	FDG0504SP	-5	5/16"	7.9	1/4"	19	19	18	350	5076
*	FDG0506SP	-5	5/16"	7.9	3/8"	19	22	19	350	5076
*	FDG0508SP	-5	5/16"	7.9	1/2"	14	27	21	350	5076
*	FDG0604SP	-6	3/8"	9.5	1/4"	19	19	19	450	6526
*	FDG0606SP	-6	3/8"	9.5	3/8"	19	22	20	450	6526
*	FDG0608SP	-6	3/8"	9.5	1/2"	14	27	21	450	6526
*	FDG0806SP	-8	1/2"	12.8	3/8"	19	19	20	415	6019
*	FDG0808SP	-8	1/2"	12.8	1/2"	14	27	22	415	6019
	FDG0812SP	-8	1/2"	12.8	3/4"	14	32	24	415	6019
*	FDG1008SP	-10	5/8"	16	1/2"	14	27	22	350	5076

BSPP FEMALE (THRUST-WIRE NUT) (2)

FEMMINA DIRITTA BSPP SV 60° DADO SPINATO CON O-RING
 FEMELLE DROITE BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 60° KONUS MIT O-RING (BSPP- GEWINDE) + GESTIFTETE
 ÜBERWURFMUTTER HEMBRA GIRATORIA RECTA BSPP CON O-RING CONO 60°
 (TUERCA CON SEGURO)

* : without o-ring / senza o-ring

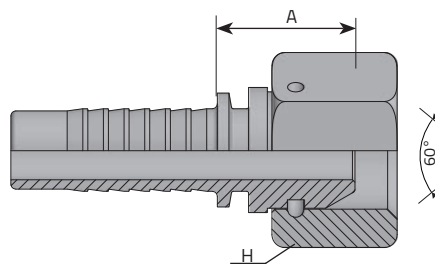


	Code	Tube		Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch		mm	Inch		mm	mm		
	FDG1012SP	-10	5/8"	16	3/4"	14	32	24	350	5076
*	FDG1208SP	-12	3/4"	19	1/2"	14	27	22.5	350	5076
	FDG1212SP	-12	3/4"	19	3/4"	14	32	25	350	5076
	FDG1612SP	-16	1"	25.4	3/4"	14	32	26	350	5076
	FDG1616SP	-16	1"	25.4	1"	11	38	27	280	4061
	FDG1620SP	-16	1"	25.4	1.1/4"	11	50	30	280	4061
	FDG2020SP	-20	1.1/4"	31.8	1.1/4"	11	50	30	210	3046
	FDG2024SP	-20	1.1/4"	31.8	1.1/2"	11	55	32	210	3046
	FDG2424SP	-24	1.1/2"	38.1	1.1/2"	11	55	32	185	2683
	FDG2432SP	-24	1.1/2"	38.1	2"	11	70	32.5	185	2683
	FDG3232SP	-32	2"	50.8	2"	11	70	33.5	165	2393

BSPP FEMALE 90° ELBOW (THRUST-WIRE NUT) (1)

FEMMINA 90° BSPP SV60° DADO SPINATO CON O-RING
 FEMELLE 90° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 90° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) + GESTIFTETE
 HEMBRA GIRATORIA A 90° BSPP CON O-RING (TUERCA CON SEGURO)

* : without o-ring / senza o-ring

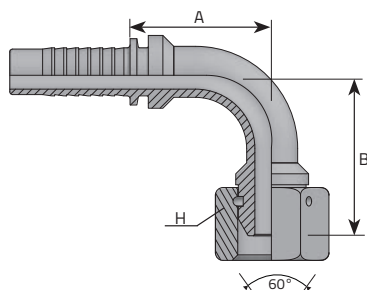


	Code	Tube		Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	B	A	
		Inch		mm	Inch		mm	mm	mm	Bar Psi
*	F90G0302SP	-3	3/16"	4.8	1/8"	28	14	29	23	350 5076
*	F90G0304SP	-3	3/16"	4.8	1/4"	19	19	29	23	415 6019
*	F90G0402SP	-4	1/4"	6.4	1/8"	28	14	29	23	350 5076
*	F90G0404SP	-4	1/4"	6.4	1/4"	19	19	29	23	450 6526
*	F90G0406SP	-4	1/4"	6.4	3/8"	19	22	32	23	450 6526
*	F90G0408SP	-4	1/4"	6.4	1/2"	14	27	39	31.5	450 6526
*	F90G0504SP	-5	5/16"	7.9	1/4"	19	19	33.5	31.5	350 5076
*	F90G0506SP	-5	5/16"	7.9	3/8"	19	22	35.5	31.5	350 5076
*	F90G0508SP	-5	5/16"	7.9	1/2"	14	27	39	31.5	350 5076
*	F90G0604SP	-6	3/8"	9.5	1/4"	19	19	37	33	450 6526
*	F90G0606SP	-6	3/8"	9.5	3/8"	19	22	38	33	450 6526
*	F90G0608SP	-6	3/8"	9.5	1/2"	14	27	42	33	450 6526
*	F90G0806SP	-8	1/2"	12.8	3/8"	19	22	43	39	415 6019
*	F90G0808SP	-8	1/2"	12.8	1/2"	14	27	45	39	415 6019
	F90G0812SP	-8	1/2"	12.8	3/4"	14	32	51	39	415 6019
*	F90G1008SP	-10	5/8"	16	1/2"	14	27	54	49	350 5076
	F90G1012SP	-10	5/8"	16	3/4"	14	32	56	49	350 5076

BSPP FEMALE 90° ELBOW (THRUST-WIRE NUT) (2)

FEMMINA 90° BSPP SV60° DADO SPINATO CON O-RING
 FEMELLE 90° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 90° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) + GESTIFTETE
 HEMBRA GIRATORIA A 90° BSPP CON O-RING (TUERCA CON SEGURO)


* : without o-ring / senza o-ring

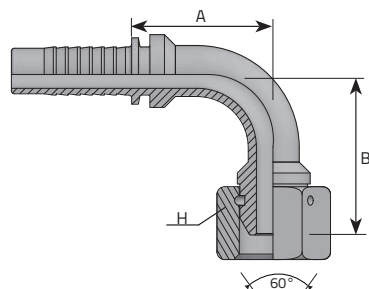

	Code	Tube			Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch		mm	Inch		mm	mm	mm		
*	F90G1208SP	-12	3/4"	19	1/2"	14	27	56	53.5	350	5076
	F90G1212SP	-12	3/4"	19	3/4"	14	32	59	53.5	350	5076
	F90G1216SP	-12	3/4"	19	1"	11	38	65	53.5	350	5076
	F90G1612SP	-16	1"	25.4	3/4"	14	32	72	68.5	350	5076
	F90G1616SP	-16	1"	25.4	1"	11	38	72	73	280	4061
	F90G1620SP	-16	1"	25.4	1.1/4"	11	50	80	73	280	4061
	F90G2020SP	-20	1.1/4"	31.8	1.1/4"	11	50	93	89	210	3046
	F90G2024SP	-20	1.1/4"	31.8	1.1/2"	11	55	98.5	89	210	3046
	F90G2424SP	-24	1.1/2"	38.1	1.1/2"	11	55	114	101	185	2683
	F90G2432SP	-24	1.1/2"	38.1	2"	11	70	118	101	185	2683
	F90G3232SP	-32	2"	50.8	2"	11	70	136	135	165	2393

BSPP FEMALE 45° ELBOW (THRUST-WIRE NUT) (1)

FEMMINA 45° BSPP SV60° DADO SPINATO CON O-RING
 FEMELLE 45° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 45° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) + GESTIFTETE
 HEMBRA GIRATORIA A 45° BSPP CON O-RING (TUERCA CON SEGURO)

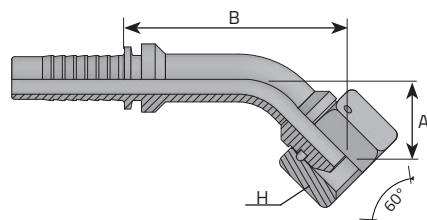


* : without o-ring / senza o-ring

	Code	Tube			Thread	Dimensions				Pressure	
		D.N.	Hose	Diam		T	t/1"	H	A	B	
		Inch		mm		Inch		mm	mm	mm	Bar Psi
*	F45G0302SP	-3	3/16"	4.8	1/8"	28		14	17	40	350 5076
*	F45G0304SP	-3	3/16"	4.8	1/4"	19		19	17	40	415 6019
*	F45G0402SP	-4	1/4"	6.4	1/8"	28		14	17	40	350 5076
*	F45G0404SP	-4	1/4"	6.4	1/4"	19		19	17	40	450 6526
*	F45G0406SP	-4	1/4"	6.4	3/8"	19		22	20	43	450 6526
*	F45G0408SP	-4	1/4"	6.4	1/2"	14		27	24	55	450 6526
*	F45G0504SP	-5	5/16"	7.9	1/4"	19		19	20	51	350 5076
*	F45G0506SP	-5	5/16"	7.9	3/8"	19		22	21	52	350 5076
*	F45G0508SP	-5	5/16"	7.9	1/2"	14		27	24	55	350 5076
*	F45G0604SP	-6	3/8"	9.5	1/4"	19		19	19	54	450 6526
*	F45G0606SP	-6	3/8"	9.5	3/8"	19		22	20	55	450 6526
*	F45G0608SP	-6	3/8"	9.5	1/2"	14		27	23	58	450 6526
*	F45G0806SP	-8	1/2"	12.8	3/8"	19		22	20	63	415 6019
*	F45G0808SP	-8	1/2"	12.8	1/2"	14		27	23	65	415 6019
	F45G0812SP	-8	1/2"	12.8	3/4"	14		32	21	66	415 6019
*	F45G1008SP	-10	5/8"	16	1/2"	14		27	25	63	350 5076

BSPP FEMALE 45° ELBOW (THRUST-WIRE NUT) (2)

FEMMINA 45° BSPP SV60° DADO SPINATO CON O-RING
 FEMELLE 45° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 45° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) + GESTIFTETE
 HEMBRA GIRATORIA A 45° BSPP CON O-RING (TUERCA CON SEGURO)


* : without o-ring / senza o-ring

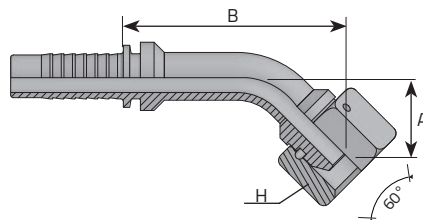

	Code	Tube		Thread			Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	A	B	Bar	Psi
		Inch		mm	Inch		mm	mm	mm		
	F45G1012SP	-10	5/8"	16	3/4"	14	32	26	64	350	5076
*	F45G1208SP	-12	3/4"	19	1/2"	14	27	28	62	350	5076
	F45G1212SP	-12	3/4"	19	3/4"	14	32	29	63	350	5076
	F45G1216SP	-12	3/4"	19	1"	11	38	31	65	350	5076
	F45G1612SP	-16	1"	25.4	3/4"	14	32	39	88	350	5076
	F45G1616SP	-16	1"	25.4	1"	11	38	41	90	280	4061
	F45G1620SP	-16	1"	25.4	1.1/4"	11	50	44	93	280	4061
	F45G2020SP	-20	1.1/4"	31.8	1.1/4"	11	50	44	102	210	3046
	F45G2024SP	-20	1.1/4"	31.8	1.1/2"	11	55	45	103	210	3046
	F45G2424SP	-24	1.1/2"	38.1	1.1/2"	11	55	45	118	185	2683
	F45G2432SP	-24	1.1/2"	38.1	2"	11	70	118	101	185	2683
	F45G3232SP	-32	2"	50.8	2"	11	70	55	145	165	2393

BSPP MALE (FLAT SEAT)


MASCHIO BSPP SEDE PIANA
 MÂLE BSPP FACE PLATE
 AGR-F FLACHDICHTEND (BSPP- GEWINDE)
 MACHO FIJO BSPP ASIENTO PLANO

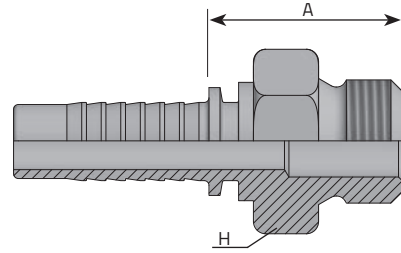

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm			
MGSP0404	-4	1/4"	6.4	1/4"	19	19	27		450	6526
MGSP0406	-4	1/4"	6.4	3/8"	19	22	29		450	6526
MGSP0506	-5	5/16"	7.9	3/8"	19	22	29		350	5076
MGSP0606	-6	3/8"	9.5	3/8"	19	22	28.5		450	6526
MGSP0608	-6	3/8"	9.5	1/2"	14	27	32		450	6526
MGSP0808	-8	1/2"	12.8	1/2"	14	27	32		415	6019
MGSP0810	-8	1/2"	12.8	5/8"	14	30	35		415	6019
MGSP0812	-8	1/2"	12.8	3/4"	14	32	36		415	6019
MGSP1010	-10	5/8"	16	5/8"	14	30	35		350	5076
MGSP1012	-10	5/8"	16	3/4"	14	32	36		350	5076
MGSP1212	-12	3/4"	19	3/4"	14	32	37		350	5076
MGSP1216	-12	3/4"	19	1"	11	38	40		350	5076
MGSP1616	-16	1"	25.4	1"	11	38	39.5		280	4061
MGSP2020	-20	1.1/4"	31.8	1.1/4"	11	50	46		210	3046
MGSP2424	-24	1.1/2"	38.1	1.1/2"	11	55	43		184	2669

BSPP FEMALE (FLAT SEAT)


FEMMINA DIRITTA BSPP SEDE PIANA
 FEMELLE DROIT BSPP FACE PLATE
 DKR-F FLACHDICHTEND (BSPP-GEWINDE)
 HEMBRA RECTA BSPP ASIENTO PLANO

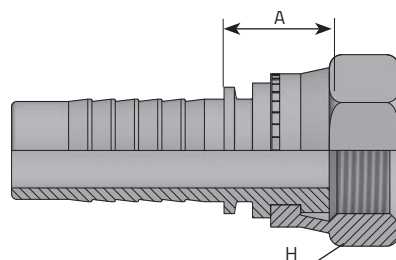

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	Inch		mm	mm		
FDGSP0404	-4	1/4"	6.4	1/4"	19	19	14	450	6526
FDGSP0406	-4	1/4"	6.4	3/8"	19	22	15	450	6526
FDGSP0506	-5	5/16"	7.9	3/8"	19	22	15	350	5076
FDGSP0606	-6	3/8"	9.5	3/8"	19	22	16	450	6526
FDGSP0608	-6	3/8"	9.5	1/2"	14	27	17	450	6526
FDGSP0808	-8	1/2"	12.8	1/2"	14	27	17	415	6019
FDGSP0810	-8	1/2"	12.8	5/8"	14	28	17	415	6019
FDGSP0812	-8	1/2"	12.8	3/4"	14	32	19	415	6019
FDGSP1010	-10	5/8"	16	5/8"	14	28	17	350	5076
FDGSP1012	-10	5/8"	16	3/4"	14	32	20	350	5076
FDGSP1212	-12	3/4"	19	3/4"	14	32	21	350	5076
FDGSP1216	-12	3/4"	19	1"	11	38	22	350	5076
FDGSP1616	-16	1"	25.4	1"	11	38	23	280	4061
FDGSP2020	-20	1.1/4"	31.8	1.1/4"	11	50	26	210	3046

NPTF MALE (1)


MASCHIO NPTF SV 60°
 MÂLE NPTF CÔNE 60°
 AGN 60° INNENKONUS (NPTF)
 MACHO NPTF CONO 60°

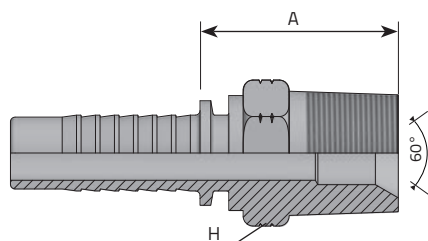

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
		Inch	mm	Inch		mm	mm			
MNPT0302	-3	3/16"	4.8	1/8"	27	12	22		350	5076
MNPT0304	-3	3/16"	4.8	1/4"	18	15	22		415	6019
MNPT0402	-4	1/4"	6.4	1/8"	27	12	22.5		350	5076
MNPT0404	-4	1/4"	6.4	1/4"	18	15	27		450	6526
MNPT0406	-4	1/4"	6.4	3/8"	18	19	28		450	6526
MNPT0408	-4	1/4"	6.4	1/2"	14	22	34		350	5076
MNPT0504	-5	5/16"	7.9	1/4"	18	15	27		350	5076
MNPT0506	-5	5/16"	7.9	3/8"	18	19	28		350	5076
MNPT0508	-5	5/16"	7.9	1/2"	14	22	28		415	6019
MNPT0604	-6	3/8"	9.5	1/4"	18	15	28		350	5076
MNPT0606	-6	3/8"	9.5	3/8"	18	19	28		450	6526
MNPT0608	-6	3/8"	9.5	1/2"	14	22	34		415	6019
MNPT0806	-8	1/2"	12.8	3/8"	18	19	28		415	6019
MNPT0808	-8	1/2"	12.8	1/2"	14	22	34.5		415	6019
MNPT0812	-8	1/2"	12.8	3/4"	14	27	34.5		415	6019
MNPT1008	-10	5/8"	16	1/2"	14	24	34.5		350	5076
MNPT1012	-10	5/8"	16	3/4"	14	27	36.5		350	5076
MNPT1212	-12	3/4"	19	3/4"	14	27	37		350	5076
MNPT1216	-12	3/4"	19	1"	11.5	36	45		280	4061

NPTF MALE (2)


MASCHIO NPTF SV 60°
MÂLE NPTF CÔNE 60°
AGN 60° INNENKONUS (NPTF)
MACHO NPTF CONO 60°

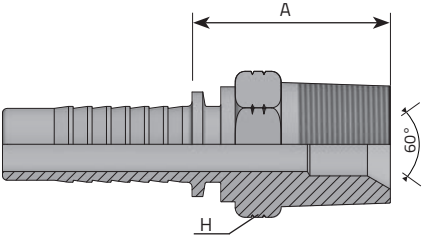

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm		
MNPT1612	-16	1"	25.4	3/4"	14	32	38	280	4061
MNPT1616	-16	1"	25.4	1"	11.5	36	46	280	4061
MNPT1620	-16	1"	25.4	1.1/4"	11.5	46	45.5	210	3046
MNPT2020	-20	1.1/4"	31.8	1.1/4"	11.5	46	46	210	3046
MNPT2024	-20	1.1/4"	31.8	1.1/2"	11.5	50	47	185	2683
MNPT2424	-24	1.1/2"	38.1	1.1/2"	11.5	50	47.3	185	2683
MNPT3232	-32	2"	50.8	2"	11.5	65	57	165	2393

NPTF MALE - LONG NOSE


MASCHIO NPTF SV 60°
MÂLE NPTF CÔNE 60°
AGN 60° INNENKONUS (NPTF)
MACHO NPTF CONO 60°

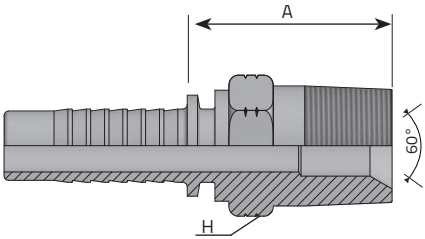

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
	Inch		mm	Inch		mm	mm			
MNPT0404LN	-4	1/4"	6.4	1/4"	18	15	37		450	6526
MNPT0406LN	-4	1/4"	6.4	3/8"	18	19	38		450	6526
MNPT0604LN	-6	3/8"	9.5	1/4"	18	15	38		450	6526
MNPT0606LN	-6	3/8"	9.5	3/8"	18	19	38		450	6526

NPSM FEMALE

FEMMINA NPSM
FEMELLE DROIT NPSM
DKR-F FLACHDICHTEND (NPSM-GEWINDE)
HEMBRA RECTA NPSM

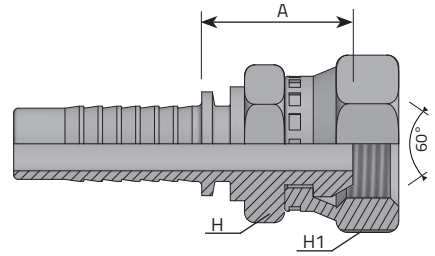

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
FNPSM0404	-4	1/4"	6.4	1/4"	18	19	19	24	345	5000
FNPSM0606	-6	3/8"	9.5	3/8"	18	22	22	26.5	276	4000
FNPSM0808	-8	1/2"	12.8	1/2"	14	22	27	29	241	3500
FNPSM1212	-12	3/4"	19	3/4"	14	27	32	37	155	2250
FNPSM1616	-16	1"	25.4	1"	11.5	32	38	40.5	138	2000
FNPSM2020	-20	1.1/4"	31.8	1.1/4"	11.5	41	50	43	112	1625

NPTF SWIVEL MALE

MASCHIO NPTF GIREVOLE SV 60°

MÂLE NPTF CÔNE 60°

AGN 60° INNENKONUS (NPTF-GEWINDE)

MACHO NPTF GIRATORIO CONO 60°


* NOT TO BE USED AS A LIVE SWIVEL

DA NON USARE COME APPLICAZIONE ROTANTE

NE PAS UTILISER COMME APPLICATION ROTATIVE

NICHT ZU BENUTZEN ALS DREHVERSCHRAUBUNG

NO USAR COMO UNA PIEZA GIRATORIA VIVA

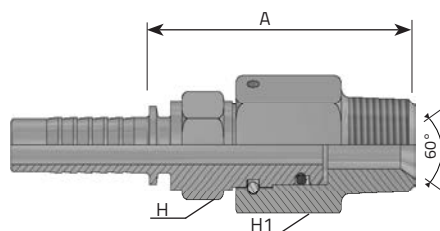


	Code	Tube			Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	H1	A	Bar	Psi
		Inch		mm	Inch		mm	mm	mm		
*	MNPTF0404SW	-4	1/4"	6.4	1/4"	18	14	17	53	350	5076
*	MNPTF0406SW	-4	1/4"	6.4	3/8"	18	17	22	58,4	350	5076
*	MNPTF0604SW	-6	3/8"	9.5	1/4"	18	17	17	56	350	5076
*	MNPTF0606SW	-6	3/8"	9.5	3/8"	18	17	22	58,4	350	5076
*	MNPTF0608SW	-6	3/8"	9.5	1/2"	14	22	27	63	350	5076
*	MNPTF0806SW	-8	1/2"	12.8	3/8"	18	22	22	59,4	350	5076
*	MNPTF0808SW	-8	1/2"	12.8	1/2"	14	22	27	63,5	350	5076
*	MNPTF0812SW	-8	1/2"	12.8	3/4"	14	27	32	71,5	280	4061
*	MNPTF1212SW	-12	3/4"	19	3/4"	14	32	32	72	280	4061
*	MNPTF1616SW	-16	1"	25.4	1"	11.5	38	38	79,4	200	2901

NPTF SWIVEL MALE 90° ELBOW (COMPACT FORGED)

MASCHIO 90° NPTF GIREVOLE SV 60° COMPATTA
 MÂLE 90° NPTF COMPACTE CÔNE 60°
 AGN 90° KOMPAKT 60° INNENKONUS (NPTF-GEWINDE)
 MACHO NPTF GIRATORIO A 90° CONO 60° COMPACTA

* NOT TO BE USED AS A LIVE SWIVEL
 DA NON USARE COME APPLICAZIONE ROTANTE
 NE PAS UTILISER COMME APPLICATION ROTATIVE
 NICHT ZU BENUTZEN ALS DREHVERSCHRAUBUNG
 NO USAR COMO UNA PIEZA GIRATORIA VIVA



	Code	Tube		Thread		Dimensions					Pressure	
		D.N.	Hose	Diam	T	t/1"	H	H1	B	A	Bar	Psi
			Inch	mm	Inch		mm	mm	mm	mm		
*	M90NPTF0404SW	-4	1/4"	6.4	1/4"	18	22	17	56	23	350	5076
*	M90NPTF0406SW	-4	1/4"	6.4	3/8"	18	22	22	58,4	23	350	5076
*	M90NPTF0604SW	-6	3/8"	9.5	1/4"	18	22	17	56	23	350	5076
*	M90NPTF0606SW	-6	3/8"	9.5	3/8"	18	22	22	58,4	23	350	5076
*	M90NPTF0608SW	-6	3/8"	9.5	1/2"	14	22	22	62,3	23	350	5076
*	M90NPTF0806SW	-8	1/2"	12.8	3/8"	18	22	27	58,4	23,5	350	5076
*	M90NPTF0808SW	-8	1/2"	12.8	1/2"	14	22	27	62,3	23,5	350	5076
*	M90NPTF0812SW	-8	1/2"	12.8	3/4"	14	27	32	72	25	280	4061
*	M90NPTF1212SW	-12	3/4"	19	3/4"	14	27	32	72	25	280	4061
*	M90NPTF1616SW	-16	1"	25.4	1"	11.5	33	38	77,9	32,5	200	2901


JIC 37° MALE (1)

MASCHIO JIC SV 37°

MÂLE JIC CÔNE 37°

AGJ 37° JIC AUSSENKONUS (UNF – GEWINDE)


MACHO JIC CONO 37°(E)

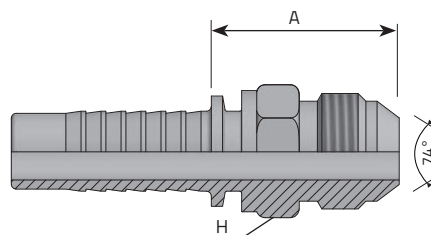

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm			
MJ0304	-3	3/16"	4.8	7/16"	20	12	27		415	6019
MJ0305	-3	3/16"	4.8	1/2"	20	14	27		415	6019
MJ0404	-4	1/4"	6.4	7/16"	20	12	27		450	6526
MJ0405	-4	1/4"	6.4	1/2"	20	14	27		450	6526
MJ0406	-4	1/4"	6.4	9/16"	18	15	28		450	6526
MJ0505	-5	5/16"	7.9	1/2"	20	14	27		350	5076
MJ0506	-5	5/16"	7.9	9/16"	18	15	28		350	5076
MJ0507	-5	5/16"	7.9	5/8"	18	17	29.5		-	-
MJ0508	-5	5/16"	7.9	3/4"	16	19	29.5		350	5076
MJ0606	-6	3/8"	9.5	9/16"	18	15	28		450	6526
MJ0607	-6	3/8"	9.5	5/8"	18	17	29.5		-	-
MJ0608	-6	3/8"	9.5	3/4"	16	19	30.5		415	6019
MJ0610	-6	3/8"	9.5	7/8"	14	24	34.5		350	5076
MJ0808	-8	1/2"	12.8	3/4"	16	19	31		415	6019
MJ0810	-8	1/2"	12.8	7/8"	14	24	35		350	5076
MJ0812	-8	1/2"	12.8	1.1/16"	12	27	39.5		350	5076
MJ1010	-10	5/8"	16	7/8"	14	24	35		350	5076

JIC 37° MALE (2)


MASCHIO JIC SV 37°
 MÂLE JIC CÔNE 37°
 AGJ 37° JIC AUSSENKONUS (UNF – GEWINDE)
 MACHO JIC CONO 37°(E)

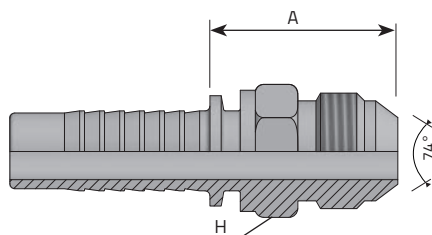

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	Inch		mm	mm		
MJ1012	16	5/8"	10	1.1/16"	12	27	39.5	350	5076
MJ1210	20	3/4"	12	7/8"	14	27	37	350	5076
MJ1212	20	3/4"	12	1.1/16"	12	27	40.5	350	5076
MJ1214	20	3/4"	12	1.3/16"	12	32	41.5	280	4061
MJ1216	20	3/4"	12	1.5/16"	12	34	41.5	280	4061
MJ1612	25	1"	16	1.1/16"	12	32	41.5	280	4061
MJ1616	25	1"	16	1.5/16"	12	34	42.5	280	4061
MJ1620	25	1"	16	1.5/8"	12	42	45	280	4061
MJ2020	32	1.1/4"	20	1.5/8"	12	42	45.5	210	3046
MJ2024	32	1.1/4"	20	1.7/8"	12	50	52.5	140	2030
MJ2424	40	1.1/2"	24	1.7/8"	12	50	52.5	140	2030
MJ3232	50	2"	32	2.1/2"	12	65	62	105	1523

JIC 37° FEMALE (1)


FEMMINA DIRITTA JIC SV 37°
 FEMELLE DROIT JIC CÔNE 37°
 DKJ 37° JIC DICHTKOPF (UNF – GEWINDE)
 HEMBRA GIRATORIA JIC CONO 37°

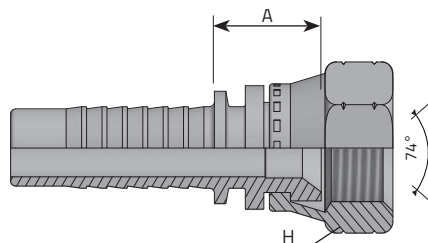

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm			
FDJ0304	-3	3/16"	4.8	7/16"	20	15	15		350	5076
FDJ0305	-3	3/16"	4.8	1/2"	20	17	15		350	5076
FDJ0404	-4	1/4"	6.4	7/16"	20	15	15		350	5076
FDJ0405	-4	1/4"	6.4	1/2"	20	17	16		350	5076
FDJ0406	-4	1/4"	6.4	9/16"	18	19	16		250	3626
FDJ0505	-5	5/16"	7.9	1/2"	20	17	16		350	5076
FDJ0506	-5	5/16"	7.9	9/16"	18	19	16		250	3626
FDJ0507	-5	5/16"	7.9	5/8"	18	22	17		-	-
FDJ0508	-5	5/16"	7.9	3/4"	16	24	17		250	3626
FDJ0606	-6	3/8"	9.5	9/16"	18	19	16.5		250	3626
FDJ0607	-6	3/8"	9.5	5/8"	18	22	17		-	-
FDJ0608	-6	3/8"	9.5	3/4"	16	24	17		250	3626
FDJ0610	-6	3/8"	9.5	7/8"	14	27	18.5		200	2901
FDJ0808	-8	1/2"	12.8	3/4"	16	24	18		250	3626
FDJ0810	-8	1/2"	12.8	7/8"	14	27	19		200	2901
FDJ0812	-8	1/2"	12.8	1.1/16"	12	32	22		200	2901
FDJ1010	-10	5/8"	16	7/8"	14	27	19.5		200	2901

JIC 37° FEMALE (2)


FEMMINA DIRITTA JIC SV 37°
 FEMELLE DROIT JIC CÔNE 37°
 DKJ 37° JIC DICHTKOPF (UNF – GEWINDE)
 HEMBRA GIRATORIA JIC CONO37°

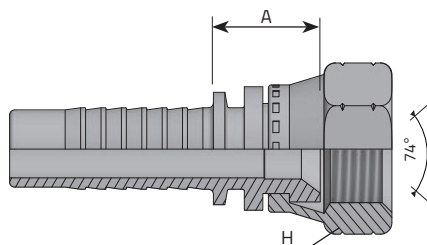

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm		
FDJ1012	-10	5/8"	16	1.1/16"	12	32	22.5	200	2901
FDJ1210	-12	3/4"	19	7/8"	14	27	20	200	2901
FDJ1212	-12	3/4"	19	1.1/16"	12	32	23	200	2901
FDJ1214	-12	3/4"	19	1.3/16"	12	36	23	160	2320
FDJ1216	-12	3/4"	19	1.5/16"	12	41	23	160	2320
FDJ1612	-16	1"	25.4	1.1/16"	12	32	24	200	2901
FDJ1616	-16	1"	25.4	1.5/16"	12	41	24.5	160	2320
FDJ1620	-16	1"	25.4	1.5/8"	12	50	28.5	125	1813
FDJ2020	-20	1.1/4"	31.8	1.5/8"	12	50	29	125	1813
FDJ2024	-20	1.1/4"	31.8	1.7/8"	12	55	31	100	1450
FDJ2424	-24	1.1/2"	38.1	1.7/8"	12	55	31	100	1450

JIC 37° FEMALE (DOUBLE HEXAGON) (1)


FEMMINA DIRITTA JIC SV 74° DOPPIO ESAGONO
 FEMELLE DROIT JIC CÔNE 74° - DOUBLE HEXAGON
 DKJ 74° KONUS MIT KONTERSECHSKANT
 HEMBRA GIRATORIA JIC CONO74° DOBLE HEXAGONO

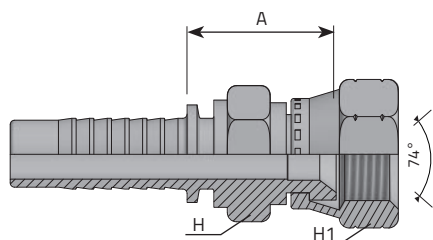

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	A	Bar	Psi
	Inch		mm	Inch		mm	mm	mm		
FDJ0404GIR	-4	1/4"	6.4	7/16"	20	14	15	23.5	350	5076
FDJ0405GIR	-4	1/4"	6.4	1/2"	20	14	17	24	350	5076
FDJ0406GIR	-4	1/4"	6.4	9/16"	18	17	19	25.7	250	3626
FDJ0505GIR	-5	5/16"	7.9	1/2"	20	-	-	-	-	-
FDJ0506GIR	-5	5/16"	7.9	9/16"	18	17	19	25.2	250	3626
FDJ0605GIR	-6	3/8"	9.5	1/2"	20	17	17	22.5	-	-
FDJ0606GIR	-6	3/8"	9.5	9/16"	18	17	19	25.2	250	3626
FDJ0608GIR	-6	3/8"	9.5	3/4"	16	19	24	27.3	250	3626
FDJ0610GIR	-6	3/8"	9.5	7/8"	14	22	27	28.5	-	-
FDJ0612GIR	-6	3/8"	9.5	1.1/16"	12	27	32	33.5	-	-
FDJ0806GIR	-8	1/2"	12.8	9/16"	18	22	19	26.7	-	-
FDJ0808GIR	-8	1/2"	12.8	3/4"	16	22	24	27.8	250	3626
FDJ0810GIR	-8	1/2"	12.8	7/8"	14	22	27	29.5	200	2900
FDJ0812GIR	-8	1/2"	12.8	1.1/16"	12	27	32	34	-	-
FDJ0816GIR	-8	1/2"	12.8	1.5/16"	12	32	38	36	-	-
FDJ1010GIR	-10	5/8"	16	7/8"	14	24	27	29.5	200	2900
FDJ1012GIR	-10	5/8"	16	1.1/16"	12	27	32	34	-	-
FDJ1014GIR	-10	5/8"	16	1.3/16"	12	27	32	32.5	200	2900

JIC 37° FEMALE (DOUBLE HEXAGON) (2)

FEMMINA DIRITTA JIC SV 74° DOPPIO ESAGONO
 FEMELLE DROIT JIC CÔNE 74° - DOUBLE HEXAGON
 DKJ 74° KONUS MIT KONTERSECHSKANT
 HEMBRA GIRATORIA JIC CONO 74° DOBLE HEXAGONO

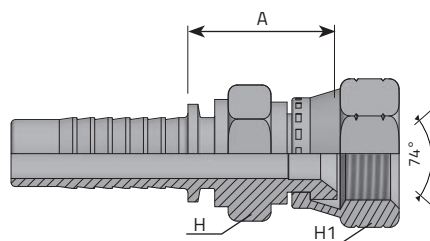

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	A	Bar	Psi
	Inch		mm	Inch		mm	mm	mm		
FDJ1210GIR	-12	3/4"	19	7/8"	14	27	27	35.3	-	-
FDJ1212GIR	-12	3/4"	19	1.1/16"	12	27	32	35	200	2900
FDJ1214GIR	-12	3/4"	19	1.3/16"	12	30	36	31	-	-
FDJ1216GIR	-12	3/4"	19	1.5/16"	12	32	38	36	-	-
FDJ1612GIR	-16	1"	25.4	1.1/16"	12	32	32	38	-	-
FDJ1614GIR	-16	1"	25.4	1.3/16"	12	32	36	36.1	-	-
FDJ1616GIR	-16	1"	25.4	1.5/16"	12	32	41	36	160	2320
FDJ1620GIR	-16	1"	25.4	1.5/8"	12	-	-	-	-	-
FDJ2020GIR	-20	1.1/4"	31.8	1.5/8"	12	41	50	49.6	-	-


JIC 37° FEMALE - 90° ELBOW (1)

FEMMINA 90° JIC SV 37°

FEMELLE 90° JIC CÔNE 37°

DKJ 90° BOGEN 37° JIC DICHTKOPF (UNF)


HEMBRA GIRATORIA A 90° JIC CONO 37°

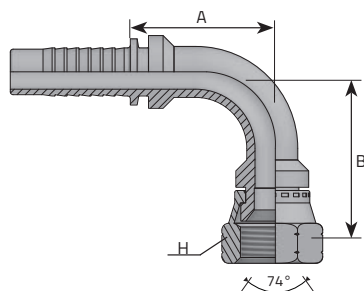

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch			mm	mm	mm		
F90J0304	-3	3/16"	4.8	7/16"	20	15	26	23	350	5076
F90J0305	-3	3/16"	4.8	1/2"	20	17	27	23	350	5076
F90J0404	-4	1/4"	6.4	7/16"	20	15	26	23	350	5076
F90J0405	-4	1/4"	6.4	1/2"	20	17	27	23	350	5076
F90J0406	-4	1/4"	6.4	9/16"	18	19	27	23	250	3626
F90J0505	-5	5/16"	7.9	1/2"	20	17	32	31.5	350	5076
F90J0506	-5	5/16"	7.9	9/16"	18	19	32	31.5	250	3626
F90J0507	-5	5/16"	7.9	5/8"	18	22	32.5	31.5	-	-
F90J0508	-5	5/16"	7.9	3/4"	16	24	32.5	31.5	250	3626
F90J0606	-6	3/8"	9.5	9/16"	18	19	35	33	250	3626
F90J0607	-6	3/8"	9.5	5/8"	18	22	35.5	33	-	-
F90J0608	-6	3/8"	9.5	3/4"	16	24	36.5	33	250	3626
F90J0610	-6	3/8"	9.5	7/8"	14	27	39.5	33	200	2901
F90J0808	-8	1/2"	12.8	3/4"	16	24	41	39	250	3626
F90J0810	-8	1/2"	12.8	7/8"	14	27	42.5	39	200	2901
F90J0812	-8	1/2"	12.8	1.1/16"	12	32	50	39	200	2901
F90J1010	-10	5/8"	16	7/8"	14	27	50	49	200	2901

JIC 37° FEMALE - 90° ELBOW (2)


FEMMINA 90° JIC SV 37°
 FEMELLE 90° JIC CÔNE 37°
 DKJ 90° BOGEN 37° JIC DICHTKOPF (UNF)
 HEMBRA GIRATORIA A 90° JIC CONO 37°

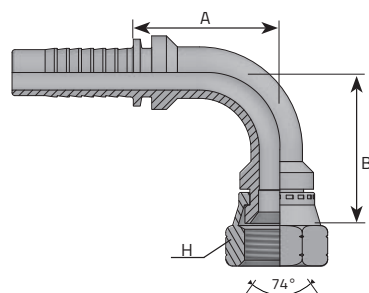

Code	Tube			Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A		Bar	Psi
		Inch	mm	Inch		mm	mm	mm			
F90J1012	-10	5/8"	16	1.1/16"	12	32	55	49		200	2901
F90J1210	-12	3/4"	19	7/8"	14	27	58	53.5		200	2901
F90J1212	-12	3/4"	19	1.1/16"	12	32	58	53.5		200	2901
F90J1214	-12	3/4"	19	1.3/16"	12	36	61	53.5		160	2320
F90J1216	-12	3/4"	19	1.5/16"	12	41	62.5	53.5		160	2320
F90J1612	-16	1"	25.4	1.1/16"	12	32	80	69		200	2901
F90J1616	-16	1"	25.4	1.5/16"	12	41	69.5	73		160	2320
F90J1620	-16	1"	25.4	1.5/8"	12	50	78.5	73		125	1813
F90J2020	-20	1.1/4"	31.8	1.5/8"	12	50	91.5	89		125	1813
F90J2024	-20	1.1/4"	31.8	1.7/8"	12	55	99	89		100	1450
F90J2424	-24	1.1/2"	38.1	1.7/8"	12	55	112.5	101		100	1450

JIC 37° FEMALE 90° ELBOW (COMPACT FORGED)

FEMMINA 90° JIC SV74° COMPATTA
FEMELLE 90° JIC COMPACTE CÔNE 60°
DKJ 90° KOMPAKT
HEMBRA GIRATORIA A 90° JIC COMPACTA

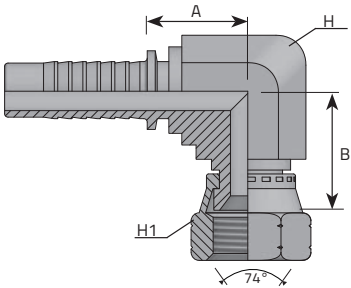

* : thrust wire nut / dado spinato / écrou à jonc / gestiftete
Überwurf mutter / tuerca con seguro

Code	Tube		Thread		Dimensions					Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	B	A	Bar	Psi
	Inch	mm	Inch			mm	mm	mm	mm		
F90J0404K	-4	1/4"	6.4	7/16"	20	14	15	21.5	19	350	5076
F90J0406K	-4	1/4"	6.4	9/16"	18	14	19	23	19	250	3626
F90J0606K	-6	3/8"	9.5	9/16"	18	19	19	25	22	250	3626
F90J0608K	-6	3/8"	9.5	3/4"	16	19	24	28	22.5	250	3626
F90J0808K	-8	1/2"	12.8	3/4"	16	22	24	28	24	250	3626
* F90J1212K	-12	3/4"	19	1.1/16"	12	27	32	36	25	200	2901
* F90J1616K	-16	1"	25.4	1.5/16"	12	33	41	41.5	32.5	160	2320


JIC 37° FEMALE - 90° ELBOW (LONG DROP)

FEMMINA 90° JIC SV 37° LONG DROP

FEMELLE 90° JIC CÔNE 37°

DKJ 90° BOGEN 37° JIC DICHTKOPF (UNF)


HEMBRA GIRATORIA A 90° JIC CONO 37° (LONG DROP)



Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F90J0404LD	-4	1/4"	6.4	7/16"	20	17	45	28.5	350	5076
F90J0405LD	-4	1/4"	6.4	1/2"	20	17	45	28.5	350	5076
F90J0406LD	-4	1/4"	6.4	9/16"	18	19	55.5	29.5	250	3626
F90J0606LD	-6	3/8"	9.5	9/16"	18	19	55	35.5	250	3626
F90J0608LD	-6	3/8"	9.5	3/4"	16	22	61.5	36.5	250	3626
F90J0808LD	-8	1/2"	12.8	3/4"	16	22	62.5	40.5	250	3626
F90J0810LD	-8	1/2"	12.8	7/8"	14	27	65	45	200	2901
F90J1010LD	-10	5/8"	16	7/8"	14	27	65.5	53.5	200	2901
F90J1212LD	-12	3/4"	19	1.1/16"	12	32	94.5	62	200	2901
F90J1616LD	-16	1"	25.4	1.5/16"	12	38	110	77	160	2320

JIC 37° FEMALE - 45° ELBOW (1)


FEMMINA 45° JIC SV 37°
 FEMELLE 45° JIC CÔNE 37°
 DKJ 45° BOGEN 37° JIC DICHTKOPF (UNF)
 HEMBRA GIRATORIA A 45° JIC CONO 37°

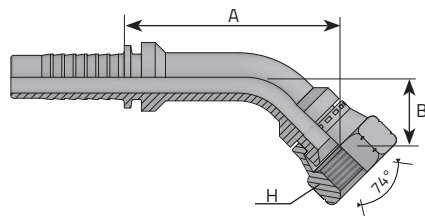

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch		mm	mm	mm			
F45J0304	-3	3/16"	4.8	7/16"	20	15	15	38	350	5076
F45J0305	-3	3/16"	4.8	1/2"	20	17	17	40	350	5076
F45J0404	-4	1/4"	6.4	7/16"	20	15	15	38	350	5076
F45J0405	-4	1/4"	6.4	1/2"	20	17	17	40	350	5076
F45J0406	-4	1/4"	6.4	9/16"	18	19	16.5	39.5	250	3626
F45J0505	-5	5/16"	7.9	1/2"	20	17	17	40	350	5076
F45J0506	-5	5/16"	7.9	9/16"	18	19	18.5	49.5	250	3626
F45J0507	-5	5/16"	7.9	5/8"	18	22	19	50	-	-
F45J0508	-5	5/16"	7.9	3/4"	16	24	19.5	50.5	250	3626
F45J0606	-6	3/8"	9.5	9/16"	18	19	18	53	250	3626
F45J0607	-6	3/8"	9.5	5/8"	18	22	19	54	-	-
F45J0608	-6	3/8"	9.5	3/4"	16	24	19	54	250	3626
F45J0610	-6	3/8"	9.5	7/8"	14	27	21	56	200	2901
F45J0808	-8	1/2"	12.8	3/4"	16	24	20	62	200	2901
F45J0810	-8	1/2"	12.8	7/8"	14	27	21	63	200	2901
F45J0812	-8	1/2"	12.8	1.1/16"	12	32	22	64	200	2901
F45J1010	-10	5/8"	16	7/8"	14	27	22	60	200	2901

JIC 37° FEMALE - 45° ELBOW (2)


FEMMINA 45° JIC SV 37°
 FEMELLE 45° JIC CÔNE 37°
 DKJ 45° BOGEN 37° JIC DICHTKOPF (UNF)
 HEMBRA GIRATORIA A 45° JIC CONO 37°

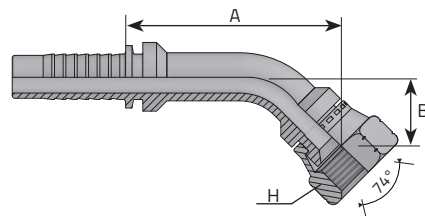

	Code	Tube			Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	B	A		
		Inch		mm	Inch		mm	mm	mm	Bar	Psi
	F45J1012	-10	5/8"	16	1.1/16"	12	32	25	63	200	2901
	F45J1210	-12	3/4"	19	7/8"	14	27	29	62	200	2901
	F45J1212	-12	3/4"	19	1.1/16"	12	32	29	62	200	2901
	F45J1214	-12	3/4"	19	1.3/16"	12	36	29	63	160	2320
	F45J1216	-12	3/4"	19	1.5/16"	12	41	29	63	160	2320
	F45J1612	-16	1"	25.4	1.1/16"	12	32	39.5	100	200	2901
	F45J1616	-16	1"	25.4	1.5/16"	12	41	39.5	88.5	160	2320
	F45J1620	-16	1"	25.4	1.5/8"	12	50	38.5	89.5	125	1813
	F45J2020	-20	1.1/4"	31.8	1.5/8"	12	50	44	101	125	1813
	F45J2024	-20	1.1/4"	31.8	1.7/8"	12	55	45	103	100	1450
	F45J2424	-24	1.1/2"	38.1	1.7/8"	12	55	45	118	100	1450

JIC 37° FEMALE - THRUST WIRE NUT (1)

FEMMINA DIRITTA JIC SV 37° DADO SPINATO
 FEMELLE DROIT JIC CÔNE 37° (ÉCROU À JONC)
 DKJ 37° JIC DICHTKOPF (UNF-GEWINDE) + GESTIFTETE ÜBERWURFMUTTER
 HEMBRA GIRATORIA JIC CONO 37° (TUERCA CON SEGURO)

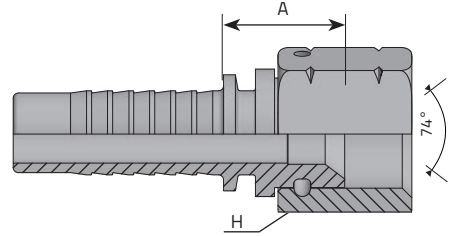

Code	Tube			Thread		Dimensions		Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm		
FDJ0304SP	-3	3/16"	4.8	7/16"	20	17	15	350	5076
FDJ0305SP	-3	3/16"	4.8	1/2"	20	17	15	350	5076
FDJ0404SP	-4	1/4"	6.4	7/16"	20	17	15	350	5076
FDJ0405SP	-4	1/4"	6.4	1/2"	20	17	16	350	5076
FDJ0406SP	-4	1/4"	6.4	9/16"	18	19	16	250	3626
FDJ0505SP	-5	5/16"	7.9	1/2"	20	17	16	350	5076
FDJ0506SP	-5	5/16"	7.9	9/16"	18	19	16	250	3626
FDJ0508SP	-5	5/16"	7.9	3/4"	16	24	17	250	3626
FDJ0606SP	-6	3/8"	9.5	9/16"	18	19	16.5	250	3626
FDJ0608SP	-6	3/8"	9.5	3/4"	16	24	17	250	3626
FDJ0610SP	-6	3/8"	9.5	7/8"	14	27	18.5	200	2901
FDJ0808SP	-8	1/2"	12.8	3/4"	16	24	18	250	3626
FDJ0810SP	-8	1/2"	12.8	7/8"	14	27	19	200	2901
FDJ0812SP	-8	1/2"	12.8	1.1/16"	12	32	22	200	2901
FDJ1010SP	-10	5/8"	16	7/8"	14	27	19.5	200	2901
FDJ1012SP	-10	5/8"	16	1.1/16"	12	32	22.5	200	2901


JIC 37° FEMALE - THRUST WIRE NUT (2)

FEMMINA DIRITTA JIC SV 37° DADO SPINATO

FEMELLE DROIT JIC CÔNE 37° (ÉCROU À JONC)

DKJ 37° JIC DICHTKOPF (UNF-GEWINDE) + GESTIFTETE ÜBERWURFMUTTER

HEMBRA GIRATORIA JIC CONO 37° (TUERCA CON SEGURO)

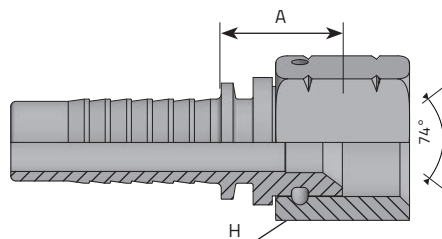

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm			
FDJ1210SP	-12	3/4"	19	7/8"	14	27	20		200	2901
FDJ1212SP	-12	3/4"	19	1.1/16"	12	32	23		200	2901
FDJ1216SP	-12	3/4"	19	1.5/16"	12	41	23		160	2320
FDJ1612SP	-16	1"	25.4	1.1/16"	12	32	24		200	2901
FDJ1616SP	-16	1"	25.4	1.5/16"	12	41	24.5		160	2320
FDJ1620SP	-16	1"	25.4	1.5/8"	12	50	28.5		125	1813
FDJ2020SP	-20	1.1/4"	31.8	1.5/8"	12	50	29		125	1813
FDJ2024SP	-20	1.1/4"	31.8	1.7/8"	12	55	31		100	1450
FDJ2424SP	-24	1.1/2"	38.1	1.7/8"	12	55	31		100	1450
FDJ2432SP	-24	1.1/2"	38.1	2.1/2"	12	70	31.5		80	1160
FDJ3232SP	-32	2"	50.8	2.1/2"	12	70	33		80	1160


JIC 37° FEMALE -90° ELBOW - THRUST WIRE NUT (1)

FEMMINA 90° JIC SV 37° CON DADO SPINATO

FEMELLE 90° JIC CÔNE 37° (ÉCROU À JONC)

DKJ 90° BOGEN 37° JIC DICHTKOPF (UNF) + GESTIFTETE ÜBERWURFMUTTER

HEMBRA GIRATORIA JIC CODO 90° CONO 37° (TUERCA CON SEGURO)

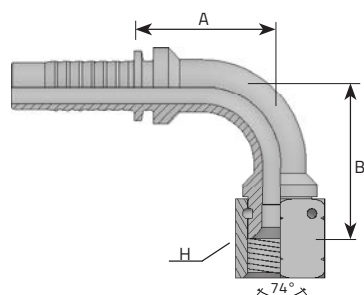

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm	mm		
F90J0304SP	-3	3/16"	4.8	7/16"	20	17	26	23	350	5076
F90J0305SP	-3	3/16"	4.8	1/2"	20	17	27	23	350	5076
F90J0404SP	-4	1/4"	6.4	7/16"	20	17	26	23	350	5076
F90J0405SP	-4	1/4"	6.4	1/2"	20	17	27	23	350	5076
F90J0406SP	-4	1/4"	6.4	9/16"	18	19	27	23	250	3626
F90J0505SP	-5	5/16"	7.9	1/2"	20	17	32	31.5	350	5076
F90J0506SP	-5	5/16"	7.9	9/16"	18	19	32	31.5	250	3626
F90J0508SP	-5	5/16"	7.9	3/4"	16	24	32.5	31.5	250	3626
F90J0606SP	-6	3/8"	9.5	9/16"	18	19	35	33	250	3626
F90J0608SP	-6	3/8"	9.5	3/4"	16	24	36.5	33	250	3626
F90J0610SP	-6	3/8"	9.5	7/8"	14	27	39.5	33	200	2901
F90J0808SP	-8	1/2"	12.8	3/4"	16	24	41	39	250	3626
F90J0810SP	-8	1/2"	12.8	7/8"	14	27	42.5	39	200	2901
F90J0812SP	-8	1/2"	12.8	1.1/16"	12	32	50	39	200	2901
F90J1010SP	-10	5/8"	16	7/8"	14	27	50	49	200	2901
F90J1012SP	-10	5/8"	16	1.1/16"	12	32	55	49	200	2901


JIC 37° FEMALE - 90° ELBOW - THRUST WIRE NUT (2)

FEMMINA 90° JIC SV 37° CON DADO SPINATO

FEMELLE 90° JIC CÔNE 37° (ÉCROU À JONC)

DKJ 90° BOGEN 37° JIC DICHTKOPF (UNF) + GESTIFTETE ÜBERWURFMUTTER

HEMBRA GIRATORIA JIC CODO 90° CONO 37° (TUERCA CON SEGURO)

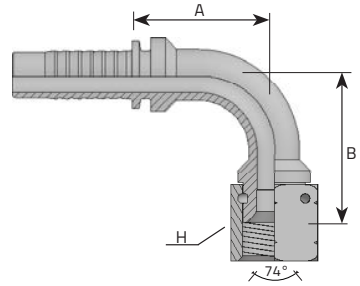

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F90J1210SP	-12	3/4"	19	7/8"	14	27	58	53.5	200	2901
F90J1212SP	-12	3/4"	19	1.1/16"	12	32	58	53.5	200	2901
F90J1216SP	-12	3/4"	19	1.5/16"	12	41	62.5	53.5	160	2320
F90J1612SP	-16	1"	25.4	1.1/16"	12	32	80	69	200	2901
F90J1616SP	-16	1"	25.4	1.5/16"	12	41	69.5	73	160	2320
F90J1620SP	-16	1"	25.4	1.5/8"	12	50	78.5	73	125	1813
F90J2020SP	-20	1.1/4"	31.8	1.5/8"	12	50	91.5	89	125	1813
F90J2024SP	-20	1.1/4"	31.8	1.7/8"	12	55	99	89	100	1450
F90J2424SP	-24	1.1/2"	38.1	1.7/8"	12	55	112.5	101	100	1450
F90J2432SP	-24	1.1/2"	38.1	2.1/2"	12	70	115.5	101	80	1160
F90J3232SP	-32	2"	50.8	2.1/2"	12	70	136	135	80	1160


JIC 37° FEMALE- 90° ELBOW LONG DROP - THRUST WIRE NUT

FEMMINA 90° JIC SV 37° CON DADO SPINATO LONG DROP

FEMELLE 90° JIC CÔNE 37° (ÉCROU À JONC)

DKJ 90° BOGEN 37° JIC DICHTKOPF(UNF)+GESTIFTETE ÜBERWURFMUTTER

HEMBRA A 90° JIC CONO 37° (TUERCA CON SEGURO) LONG DROP



Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch			mm	mm	mm		
F90J0404SPLD	-4	1/4"	6.4	7/16"	20	17	45	28.5	350	5076
F90J0405SPLD	-4	1/4"	6.4	1/2"	20	17	45	28.5	350	5076
F90J0406SPLD	-4	1/4"	6.4	9/16"	18	19	55.5	29.5	250	3626
F90J0606SPLD	-6	3/8"	9.5	9/16"	18	19	55	35.5	250	3626
F90J0608SPLD	-6	3/8"	9.5	3/4"	16	24	61.5	36.5	250	3626
F90J0808SPLD	-8	1/2"	12.8	3/4"	16	24	61.5	40.5	250	3626
F90J0810SPLD	-8	1/2"	12.8	7/8"	14	27	65	45	200	2901
F90J1010SPLD	-10	5/8"	16	7/8"	14	27	65.5	53.5	200	2901
F90J1212SPLD	-12	3/4"	19	1.1/16"	12	32	94.5	62	200	2901
F90J1616SPLD	-16	1"	25.4	1.5/16"	12	38	132	77	160	2320


JIC 37° FEMALE - 45° ELBOW - THRUST WIRE NUT (1)

FEMMINA 45° JIC SV 37° CON DADO SPINATO

FEMELLE 45° JIC CÔNE 37° (ÉCROU À JONC)

DKJ 45° BOGEN 37° JIC DICHTKOPF (UNF)+GESTIFTETE ÜBERWURFMUTTER

HEMBRA GIRATORIA A 45° JIC CONO 37° (TUERCA CON SEGURO)

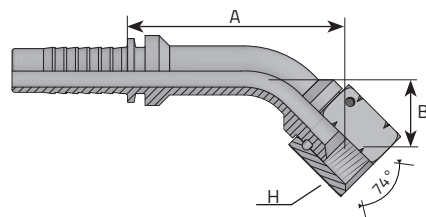

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch			mm	mm	mm		
F45J0304SP	-3	3/16"	4.8	7/16"	20	17	15	38	350	5076
F45J0305SP	-3	3/16"	4.8	1/2"	20	17	17	40	350	5076
F45J0404SP	-4	1/4"	6.4	7/16"	20	17	15	38	350	5076
F45J0405SP	-4	1/4"	6.4	1/2"	20	17	17	40	350	5076
F45J0406SP	-4	1/4"	6.4	9/16"	18	19	16.5	39.5	250	3626
F45J0505SP	-5	5/16"	7.9	1/2"	20	17	17	40	350	5076
F45J0506SP	-5	5/16"	7.9	9/16"	18	19	18.5	49.5	250	3626
F45J0508SP	-5	5/16"	7.9	3/4"	16	24	19.5	50.5	250	3626
F45J0606SP	-6	3/8"	9.5	9/16"	18	19	18	53	250	3626
F45J0608SP	-6	3/8"	9.5	3/4"	16	24	19	54	250	3626
F45J0610SP	-6	3/8"	9.5	7/8"	14	27	21	56	200	2901
F45J0808SP	-8	1/2"	12.8	3/4"	16	24	20	62	200	2901
F45J0810SP	-8	1/2"	12.8	7/8"	14	27	21	63	200	2901
F45J0812SP	-8	1/2"	12.8	1.1/16"	12	32	22	64	200	2901
F45J1010SP	-10	5/8"	16	7/8"	14	27	22	60	200	2901
F45J1012SP	-10	5/8"	16	1.1/16"	12	32	25	63	200	2901


JIC 37° FEMALE - 45° ELBOW - THRUST WIRE NUT (2)

FEMMINA 45° JIC SV 37° CON DADO SPINATO

FEMELLE 45° JIC CÔNE 37° (ÉCROU À JONC)

DKJ 45° BOGEN 37° JIC DICHTKOPF (UNF)+GESTIFTETE ÜBERWURFMUTTER


HEMBRA GIRATORIA A 45° JIC CONO 37° (TUERCA CON SEGURO)

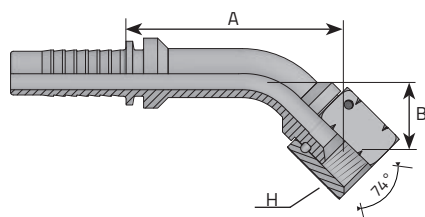

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F45J1210SP	-12	3/4"	19	7/8"	14	27	29	62	200	2901
F45J1212SP	-12	3/4"	19	1.1/16"	12	32	29	62	200	2901
F45J1216SP	-12	3/4"	19	1.5/16"	12	41	29	63	160	2320
F45J1612SP	-16	1"	25.4	1.1/16"	12	32	39.5	100	200	2901
F45J1616SP	-16	1"	25.4	1.5/16"	12	41	39.5	88.5	160	2320
F45J1620SP	-16	1"	25.4	1.5/8"	12	50	38.5	89.5	125	1813
F45J2020SP	-20	1.1/4"	31.8	1.5/8"	12	50	44	101	125	1813
F45J2024SP	-20	1.1/4"	31.8	1.7/8"	12	55	45	103	100	1450
F45J2424SP	-24	1.1/2"	38.1	1.7/8"	12	55	45	118	100	1450
F45J2432SP	-24	1.1/2"	38.1	2.1/2"	12	70	45.5	121	80	1160
F45J3232SP	-32	2"	50.8	2.1/2"	12	70	65.5	156	80	1160

O-RING BOSS MALE


MASCHIO O-RING BOSS
 MÂLE O-RING BOSS
 SAE AUSSERGEWINDE O-RING BOSS
 MACHO FIJO O-RING BOSS (E)

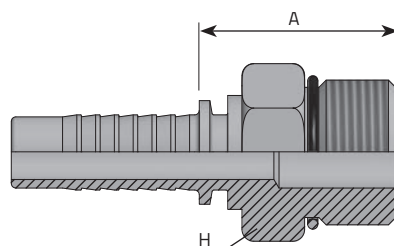

	Code	Tube			Thread		Dimensions		Pressure	
		D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
			Inch	mm	Inch		mm	mm		
	MOB0404	-4	1/4"	6.4	7/16"	20	14	23.5		
	MOB0405	-4	1/4"	6.4	1/2"	20	17	25.5		
	MOB0406	-4	1/4"	6.4	9/16"	18	17	28		
	MOB0606	-6	3/8"	9.5	9/16"	18	17	28		
	MOB0608	-6	3/8"	9.5	3/4"	16	22	30.5		
	MOB0610	-6	3/8"	9.5	7/8"	14	27	34.5		
	MOB0808	-8	1/2"	12.8	3/4"	16	22	31		
	MOB0810	-8	1/2"	12.8	7/8"	14	27	35		
	MOB0812	-8	1/2"	12.8	1.1/16"	12	32	39		
	MOB1008	-10	5/8"	16	3/4"	16	24	31.5		
	MOB1010	-10	5/8"	16	7/8"	14	27	35		
	MOB1012	-10	5/8"	16	1.1/16"	12	32	39		
	MOB1212	-12	3/4"	19	1.1/16"	12	32	39		
	MOB1216	-12	3/4"	19	1.5/16"	12	38	41.5		
	MOB1616	-16	1"	25.4	1.5/16"	12	38	43		
	MOB1620	-16	1"	25.4	1.5/8"	12	46	44		
	MOB2020	-20	1".1/4	31.8	1.5/8"	12	46	44.5		

O-RING BOSS SWIVEL MALE

MASCHIO O-RING BOSS GIREVOLE
MÂLE O-RING BOSS
AGJO SAE O-RING DREHBAR
MACHO O-RING BOSS GIRATORIO

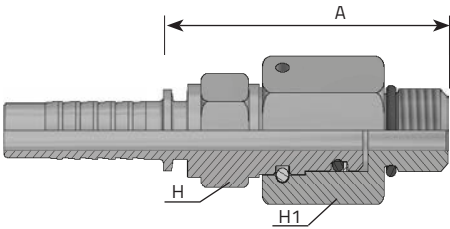


* NOT TO BE USED AS A LIVE SWIVEL
DA NON USARE COME APPLICAZIONE ROTANTE
NE PAS UTILISER COMME APPLICATION ROTATIVE
NICHT ZU BENUTZEN ALS DREHVERSCHRAUBUNG
NO USAR COMO UNA PIEZA GIRATORIA VIVA

	Code	Tube			Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	H1	A	Bar	Psi
		Inch	mm	Inch			mm	mm	mm		
*	MOB0404SW	-4	1/4"	6.4	7/16"	20	14	17	49	350	5076
*	MOB0406SW	-4	1/4"	6.4	9/16"	18	17	22	51,4	350	5076
*	MOB0604SW	-6	3/8"	9.5	7/16"	20	17	17	52	350	5076
*	MOB0606SW	-6	3/8"	9.5	9/16"	18	17	22	54,4	350	5076
*	MOB0608SW	-6	3/8"	9.5	3/4"	16	22	27	58	350	5076
*	MOB0806SW	-8	1/2"	12.8	9/16"	18	22	22	55,4	350	5076
*	MOB0808SW	-8	1/2"	12.8	3/4"	16	22	27	58,5	350	5076
*	MOB0812SW	-8	1/2"	12.8	1.1/16"	12	27	32	62,8	280	4061
*	MOB1212SW	-12	3/4"	19	1.1/16"	12	32	32	71,5	280	4061
*	MOB1616SW	-16	1"	25.4	1.5/16"	12	38	38	74	200	2901

90° SAE SWIVEL MALE O-RING BOSS (COMPACT FORGED)

MASCHIO 90° O-RING BOSS GIREVOLE COMPATTA
 MÂLE 90° O-RING BOSS COMPACTE
 AGJO 90° KOMPAKT BOGEN DREHBAR MIT O-RING
 MACHO O-RING BOSS GIRATORIO A 90° COMPACTO


* NOT TO BE USED AS A LIVE SWIVEL
 DA NON USARE COME APPLICAZIONE ROTANTE
 NE PAS UTILISER COMME APPLICATION ROTATIVE
 NICHT ZU BENUTZEN ALS DREHVERSCHRAUBUNG
 NO USAR COMO UNA PIEZA GIRATORIA VIVA

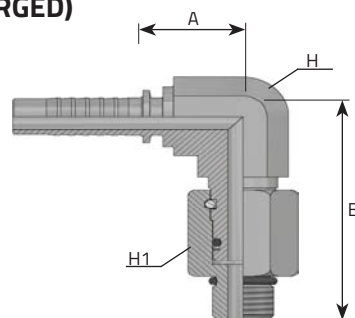

	Code	Tube		Thread		Dimensions					Pressure	
		D.N.	Hose	Diam	T	t/1"	H	H1	B	A	Bar	Psi
			Inch	mm	Inch		mm	mm	mm	mm		
*	MOB900404SW	-4	1/4"	6.4	7/16"	20	22	17	52	23	350	5076
*	MOB900406SW	-4	1/4"	6.4	9/16"	18	22	22	54,4	23	350	5076
*	MOB900604SW	-6	3/8"	9.5	7/16"	20	22	17	52	23	350	5076
*	MOB900606SW	-6	3/8"	9.5	9/16"	18	22	22	54,4	23	350	5076
*	MOB900608SW	-6	3/8"	9.5	3/4"	16	22	27	57,5	23	350	5076
*	MOB900806SW	-8	1/2"	12.8	9/16"	18	22	22	54,4	23,5	350	5076
*	MOB900808SW	-8	1/2"	12.8	3/4"	16	22	27	57,5	23,5	350	5076
*	MOB900812SW	-8	1/2"	12.8	1.1/16"	12	27	32	71,5	23,5	280	4061
*	MOB901212SW	-12	3/4"	19	1.1/16"	12	27	32	71,5	25	280	4061
*	MOB901616SW	-16	1"	25.4	1.5/16"	12	33	38	72,5	32,5	200	2901

SAE 45° MALE


MASCHIO SAE CONO 45°
MÂLE SAE CÔNE 45°
SAE AUSSENGEWINDE 45° KONUS
MAJO SAE 45°

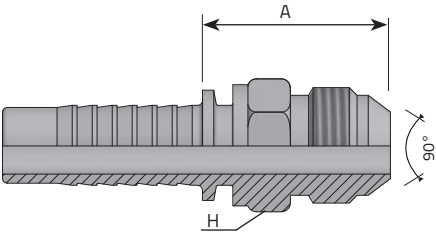

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm		
MJ0404SV45	-4	1/4"	6.4	7/16"	20	14	25.2	450	6526
MJ0405SV45	-4	1/4"	6.4	1/2"	20	14	-	450	6526
MJ0607SV45	-6	3/8"	9.5	5/8"	18	17	29	-	-
MJ0608SV45	-6	3/8"	9.5	3/4"	16	19	30.5	415	6018
MJ0808SV45	-8	1/2"	12.8	3/4"	16	19	31	415	6018
MJ0810SV45	-8	1/2"	12.8	7/8"	14	24	35	350	5076
MJ1212SV45	-12	3/4"	19	1.1/16"	12	30	40.5	350	5076

SAE 45° FEMALE (DOUBLE HEXAGON)


FEMMINA SAE DIRITTA CONO 45°
 FEMELLE DROIT SAE CÔNE 45°
 SAE DICHTKOPF 45° KONUS
 HEMBRA GIRATORIA RECTA SAE 45°

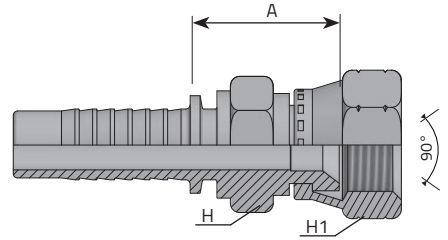

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
FDJ0404GIR45	-4	1/4"	6.4	7/16"	20	14	14	20.7	350	5076
FDJ0405GIR45	-4	1/4"	6.4	1/2"	20	14	17	21.4	350	5076
FDJ0607GIR45	-6	3/8"	9.5	5/8"	18	17	22	25.2	-	-
FDJ0608GIR45	-6	3/8"	9.5	3/4"	16	19	22	27.3	250	3626
FDJ0808GIR45	-8	1/2"	12.8	3/4"	16	19	22	27.8	250	3626
FDJ0810GIR45	-8	1/2"	12.8	7/8"	14	22	-	29.5	200	2900
FDJ1212GIR45	-12	3/4"	19	1.1/16"	14	27	32	35	200	2900

SAE 45° FEMALE - 90° ELBOW


FEMMINA SAE A 90° SV 45°
FEMELLE 90° SAE CÔNE 45°
90° SAE DICHTKOPF 45° KONUS
HEMBRA GIRATORIA A 90° SAE 45°

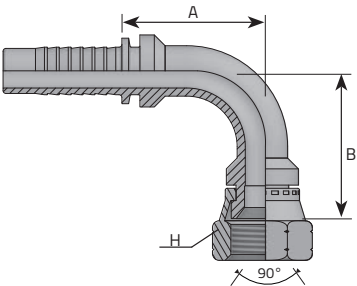

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch		mm	Inch		mm	mm	mm		
F90J0404SV45	-4	1/4"	6.4	7/16"	20	15	26	23	350	5076
F90J0405SV45	-4	1/4"	6.4	1/2"	20	17	27	23	350	5076
F90J0507SV45	-5	5/16"	7.9	5/8"	18	22	32.5	31.5	-	-
F90J0607SV45	-6	3/8"	9.5	5/8"	18	22	35.5	33	-	-
F90J0608SV45	-6	3/8"	9.5	3/4"	16	24	36.5	33	250	3626
F90J0808SV45	-8	1/2"	12.8	3/4"	16	24	41	39	250	3626
F90J1212SV45	-12	3/4"	19	1.1/16"	14	32	58	53.5	200	2900

SAE 45° FEMALE - 45° ELBOW


FEMMINA SAE A 45° SV 45°
 FEMELLE 45° SAE CÔNE 45°
 45° SAE DICHTKOPF 45° KONUS
 HEMBRA GIRATORIA A 45° SAE 45°

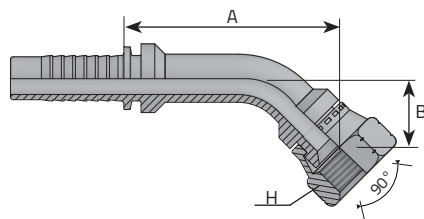

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	
		Inch	mm	Inch		mm	mm	mm	Bar Psi
F45J0404SV45	-4	1/4"	6.4	7/16"	20	15	15	38	350 5076
F45J0405SV45	-4	1/4"	6.4	1/2"	20	17	17	40	350 5076
F45J0607SV45	-6	3/8"	9.5	5/8"	18	22	19	54	
F45J0608SV45	-6	3/8"	9.5	3/4"	16	24	19	54	250 3626
F45J0808SV45	-8	1/2"	12.8	3/4"	16	24	20	62	200 2900
F45J0810SV45	-8	1/2"	12.8	7/8"	14	27	21	63	200 2900
F45J0812SV45	-8	1/2"	12.8	1.1/16"	14	32	22	64	200 2900
F45J1212SV45	-12	3/4"	19	1.1/16"	14	32	29	62	200 2900

KOMATSU STYLE METRIC FEMALE


FEMMINA METRICA "KOMATSU" SV 60°
 FEMELLE MÉTRIQUE DROIT "KOMATSU" CÔNE 60°
 DK "KOMATSU" 60° KONUS METRISCH
 HEMBRA GIRATORIA RECTA MÉTRICA "KOMATSU" CONO 60°

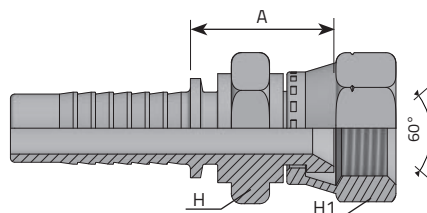

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	A	Bar	Psi
	Inch		mm	mm		mm	mm	mm		
FDK0414	-4	1/4"	6.4	M14 x 1.5		17	19	24.2	350	5076
FDK0416	-4	1/4"	6.4	M 16 x 1.5		19	22	24.2	280	4061
FDK0516	-5	5/16"	7.9	M16 x 1.5		19	22	24.2	280	4061
FDK0614	-6	3/8"	9.5	M14 x 1.5		17	19	24.2	280	4061
FDK0616	-6	3/8"	9.5	M16 x 1.5		19	22	24.2	280	4061
FDK0618	-6	3/8"	9.5	M18 x 1.5		24	24	25.8	280	4061
FDK0818	-8	1/2"	12.8	M18 x 1.5		24	24	26.3	280	4061
FDK0820	-8	1/2"	12.8	M20 x 1.5		27	27	29	200	2901
FDK0822	-8	1/2"	12.8	M22 x 1.5		27	27	29	200	2901
FDK0824	-8	1/2"	12.8	M24 x 1.5		32	32	32	200	2901
FDK1022	-10	5/8"	16	M22 x 1.5		27	27	29	200	2901
FDK1024	-10	5/8"	16	M24 x 1.5		32	32	32.5	200	2901
FDK1230	-12	3/4"	19	M30 x 1.5		36	36	32.5	160	2320
FDK1633	-16	1"	25.4	M33 x 1.5		41	41	34.6	160	2320
FDK2036	-20	1.1/4"	31.8	M36 x 1.5		46	46	37.5	125	1813
FDK2442	-24	1.1/2"	38.1	M42 x 1.5		50	50	36.1	100	1450

KOMATSU STYLE FEMALE - 90° ELBOW


FEMMINA 90° METRICA "KOMATSU" SV 60°
 FEMELLE 90° MÉTRIQUE "KOMATSU" CÔNE 60°
 DKM 90° "KOMATSU" 60° KONUS METRISCH
 HEMBRA GIRATORIA A 90° MÉTRICA "KOMATSU" CONO 60°

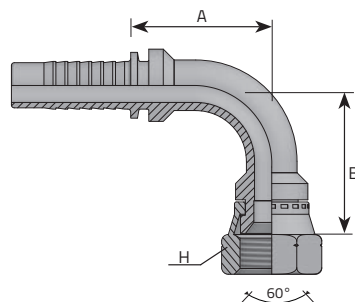

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	mm	mm	mm	mm	mm	mm	Bar	Psi
F90K0414	-4	1/4"	6.4	M14 x 1.5	19	27	23		350	5076
F90K0416	-4	1/4"	6.4	M16 x 1.5	22	27	23		250	3626
F90K0516	-5	5/16"	7.9	M16 x 1.5	22	32	31.5		250	3626
F90K0614	-6	3/8"	9.5	M14 x 1.5	19	35	33		250	3626
F90K0616	-6	3/8"	9.5	M16 x 1.5	22	35	33		250	3626
F90K0618	-6	3/8"	9.5	M18 x 1.5	24	36.5	33		250	3626
F90K0818	-8	1/2"	12.8	M18 x 1.5	24	41	39		250	3626
F90K0820	-8	1/2"	12.8	M20 x 1.5	27	43.5	39		200	2901
F90K0822	-8	1/2"	12.8	M22 x 1.5	27	43.5	39		200	2901
F90K0824	-8	1/2"	12.8	M24 x 1.5	32	50	39		200	2901
F90K1022	-10	5/8"	16	M22 x 1.5	27	50	49		200	2901
F90K1024	-10	5/8"	16	M24 x 1.5	32	55	49		200	2901
F90K1230	-12	3/4"	19	M30 x 1.5	36	62.5	53.5		160	2320
F90K1633	-16	1"	25.4	M33 x 1.5	41	69.5	73		160	2320
F90K2036	-20	1.1/4"	31.8	M36 x 1.5	46	88	89		125	1813
F90K2442	-24	1.1/2"	38.1	M42 x 1.5	50	106.5	101		100	1450

KOMATSU STYLE FEMALE - 45° ELBOW


FEMMINA 45° METRICA "KOMATSU" SV 60°
 FEMELLE 45° MÉTRIQUE "KOMATSU" CÔNE 60°
 DKM 45° "KOMATSU" 60° KONUS METRISCH
 HEMBRA MÉTRICA A 45° "KOMATSU" CONO 60°

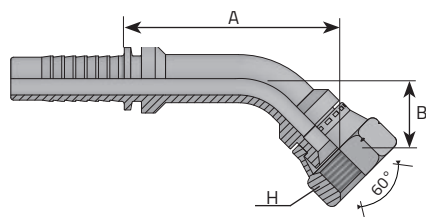

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		t/1"	H	B	A	
	Inch	mm	mm		mm	mm	mm	Bar	Psi
F45K0414	-4	1/4"	6.4	M14 x 1.5	19	17	40	350	5076
F45K0416	-4	1/4"	6.4	M16 x 1.5	22	17	40	250	3626
F45K0516	-5	5/16"	7.9	M16 x 1.5	22	18.5	49.5	250	3626
F45K0614	-6	3/8"	9.5	M14 x 1.5	19	18	53	250	3626
F45K0616	-6	3/8"	9.5	M16 x 1.5	22	18	53	250	3626
F45K0618	-6	3/8"	9.5	M18 x 1.5	24	19	54	250	3626
F45K0818	-8	1/2"	12.8	M18 x 1.5	24	20	62	250	3626
F45K0820	-8	1/2"	12.8	M20 x 1.5	27	22	63	200	2901
F45K0822	-8	1/2"	12.8	M22 x 1.5	27	22	63	200	2901
F45K0824	-8	1/2"	12.8	M24 x 1.5	32	22	64	200	2901
F45K1022	-10	5/8"	16	M22 x 1.5	27	22	60	200	2901
F45K1024	-10	5/8"	16	M24 x 1.5	32	25	63	200	2901
F45K1230	-12	3/4"	19	M30 x 1.5	36	29	63	160	2320
F45K1633	-16	1"	25.4	M33 x 1.5	41	39.5	88.5	160	2320
F45K2036	-20	1.1/4"	31.8	M36 x 1.5	46	40	101	125	1813
F45K2442	-24	1.1/2"	38.1	M42 x 1.5	50	39	118	100	1450

TOYOTA STYLE FEMALE


FEMMINA DIRITTA TOYOTA SV 60°
 FEMELLE DROIT TOYOTA CÔNE 60°
 DK TOYOTA 60° KONUS
 HEMBRA GIRATORIA RECTA TOYOTA CONO 60°

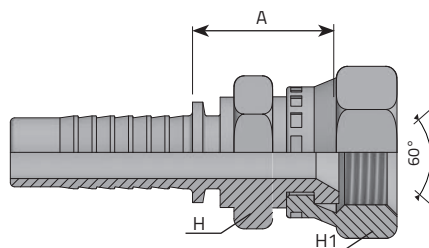

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
FDT0404	-4	1/4"	6.4	1/4"	19	17	19	51	350	5076
FDT0606	-6	3/8"	9.5	3/8"	19	19	22	54	280	4061
FDT0808	-8	1/2"	12.8	1/2"	14	22	27	60.5	200	2901
FDT1212	-12	3/4"	19	3/4"	14	27	32	70.5	200	2901
FDT1616	-16	1"	25.4	1"	11	32	38	88	160	2320
FDT2020	-20	1.1/4"	31.8	1.1/4"	11	41	50	97.5	125	1813
FDT2424	-24	1.1/2"	38.1	1.1/2"	11	50	55	110.5	100	1450

TOYOTA STYLE FEMALE - 90° ELBOW


FEMMINA 90° TOYOTA
 FEMELLE 90° TOYOTA CÔNE 60°
 DK 90° TOYOTA 60° KONUS
 HEMBRA GIRATORIA A 90° TOYOTA CONO 60°



Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F90T0404	-4	1/4"	6.4	1/4"	19	19	26	23	350	5076
F90T0606	-6	3/8"	9.5	3/8"	19	22	34.5	33	280	4061
F90T0808	-8	1/2"	12.8	1/2"	14	27	41	39	200	2901
F90T1212	-12	3/4"	19	3/4"	14	32	54.5	53.5	200	2901
F90T1616	-16	1"	25.4	1"	11	38	68	73	160	2320
F90T2020	-20	1.1/4"	31.8	1.1/2"	11	50	88.5	89	125	1813
F90T2424	-24	1.1/2"	38.1	1.1/2"	11	55	109.5	101	100	1450

TOYOTA STYLE FEMALE 45° ELBOW


FEMMINA 45° TOYOTA
 FEMELLE 45° TOYOTA CÔNE 60°
 DK 45° TOYOTA 60° KONUS
 HEMBRA GIRATORIA A 45° TOYOTA CONO 60°

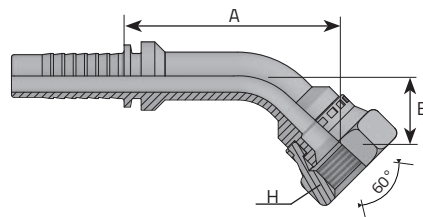

	Code	Tube			Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	B	A		
		Inch	mm	Inch			mm	mm	mm	Bar	Psi
	F45T0404	-4	1/4"	6.4	1/4"	19	19	14	40	350	5076
	F45T0606	-6	3/8"	9.5	3/8"	19	22	16.5	55	280	4061
	F45T0808	-8	1/2"	12.8	1/2"	14	27	19	65	200	2901
	F45T1212	-12	3/4"	19	3/4"	14	32	24.5	63	200	2901
	F45T1616	-16	1"	25.4	1"	11	38	37	90	160	2320
	F45T2020	-20	1.1/4"	31.8	1.1/4"	11	50	39.5	102	125	1813
	F45T2424	-24	1.1/2"	38.1	1.1/2"	11	55	40.5	118	100	1450

METRIC MALE -CONE 60° (1)


MASCHIO METRICO SV 60°
MÂLE MÉTRIQUE CÔNE 60°
AGM 60° INNENKONUS
MACHO MÉTRICO CONO 60°

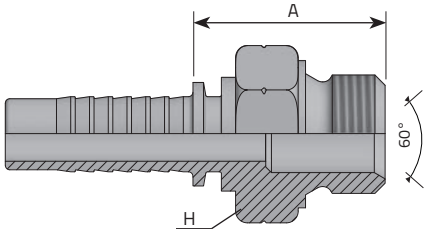

Code	Tube			Thread	Dimensions		Pressure	
	D.N.	Hose	Diam		H	A	Bar	Psi
	Inch		mm		mm	mm		
MM0310	-3	3/16"	4.8	M10 x 1	14	21	400	5801
MM0312	-3	3/16"	4.8	M12 x 1.5	17	24.5	400	5801
MM0410	-4	1/4"	6.4	M10 x 1	14	21	400	5801
MM0412	-4	1/4"	6.4	M12 x 1.5	17	25.5	400	5801
MM0414	-4	1/4"	6.4	M14 x 1.5	19	27	400	5801
MM0416	-4	1/4"	6.4	M16 x 1.5	22	29	400	5801
MM0418	-4	1/4"	6.4	M18 x 1.5	24	29	400	5801
MM0514	-5	5/16"	7.9	M14 x 1.5	19	27	350	5076
MM0516	-5	5/16"	7.9	M16 x 1.5	22	29	350	5076
MM0518	-5	5/16"	7.9	M18 x 1.5	24	29	350	5076
MM0614	-6	3/8"	9.5	M14 x 1.5	19	27	400	5801
MM0616	-6	3/8"	9.5	M16 x 1.5	22	29	400	5801
MM0618	-6	3/8"	9.5	M18 x 1.5	24	29	400	5801
MM0620	-6	3/8"	9.5	M20 x 1.5	27	32	350	5076
MM0622	-6	3/8"	9.5	M22 x 1.5	27	32	350	5076
MM0818	-8	1/2"	12.8	M18 x 1.5	24	29	400	5801

METRIC MALE - CONE 60° (2)

MASCHIO METRICO SV 60°
 MÂLE MÉTRIQUE CÔNE 60°
 AGM 60° INNENKONUS
 MACHO MÉTRICO CONO 60°

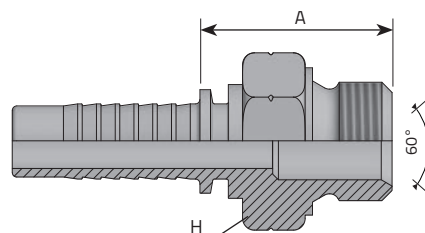

	Code	Tube		Thread		Dimensions		Pressure	
		D.N.	Hose	Diam	T	H	A	Bar	Psi
		Inch		mm	mm	mm	mm		
	MM0820	-8	1/2"	12.8	M20 x 1.5	27	33	350	5076
	MM0822	-8	1/2"	12.8	M22 x 1.5	27	33	350	5076
	MM0824	-8	1/2"	12.8	M24 x 1.5	30	36	315	4568
	MM0826	-8	1/2"	12.8	M26 x 1.5	32	36	315	4568
	MM1026	-10	5/8"	16	M26 x 1.5	32	36	315	4568
	MM1226	-12	3/4"	19	M26 x 1.5	32	37	315	4568
	MM1230	-12	3/4"	19	M30 x 1.5	36	36	250	3626
	MM1638	-16	1"	25.4	M38 x 1.5	46	37	200	2901
	MM2045	-20	1.1/4"	31.8	M45 x 1.5	50	43.5	160	2320
	MM2452	-24	1.1/2"	38.1	M52 x 1.5	55	46	125	1813


METRIC FEMALE - 60° CONE (1)

FEMMINA METRICA SV 60°

FEMELLE DROIT MÉTRIQUE CÔNE 60°

DKM 60° KONUS

HEMBRA GIRATORIA MÉTRICA CONO 60°

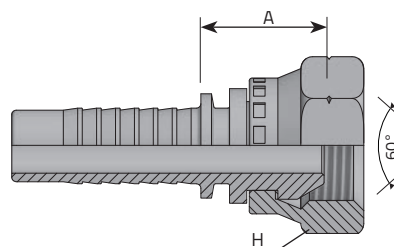


Code	Tube		Thread		Dimensions		Pressure	
	D.N.	Hose	Diam	T	H	A	Bar	Psi
		Inch	mm	mm	mm	mm		
FDM0310	-3	3/16"	4.8	M10 x 1	15	18	350	5076
FDM0312	-3	3/16"	4.8	M12 x 1.5	17	18	350	5076
FDM0410	-4	1/4"	6.4	M10 x 1	15	18	350	5076
FDM0412	-4	1/4"	6.4	M12 x 1.5	17	18	350	5076
FDM0414	-4	1/4"	6.4	M14 x 1.5	19	18	350	5076
FDM0416	-4	1/4"	6.4	M16 x 1.5	22	19	350	5076
FDM0418	-4	1/4"	6.4	M18 x 1.5	22	19	350	5076
FDM0514	-5	5/16"	7.9	M14 x 1.5	19	18	350	5076
FDM0516	-5	5/16"	7.9	M16 x 1.5	22	19	350	5076
FDM0518	-5	5/16"	7.9	M18 x 1.5	22	19	350	5076
FDM0614	-6	3/8"	9.5	M14 x 1.5	19	19	350	5076
FDM0616	-6	3/8"	9.5	M16 x 1.5	22	20	350	5076
FDM0618	-6	3/8"	9.5	M18 x 1.5	22	20	350	5076
FDM0620	-6	3/8"	9.5	M20 x 1.5	27	21	315	4568
FDM0622	-6	3/8"	9.5	M22 x 1.5	27	21	315	4568
FDM0818	-8	1/2"	12.8	M18 x 1.5	24	20	315	4568

METRIC FEMALE - 60° CONE (2)

FEMMINA METRICA SV 60°
FEMELLE DROIT MÉTRIQUE CÔNE 60°
DKM 60° KONUS
HEMBRA GIRATORIA MÉTRICA CONO 60°

* REMOVABLE NUT + SPHERICAL SEATING
DADO SFILABILE + OGIVA SFERICA

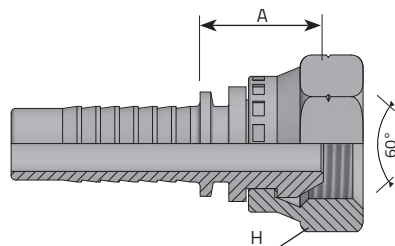

Code	Tube			Thread	Dimensions		Pressure	
	D.N.	Hose	Diam		H	A	Bar	Psi
		Inch	mm	mm	mm	mm		
FDM0820	-8	1/2"	12.8	M20 x 1.5	27	22	315	4568
FDM0822	-8	1/2"	12.8	M22 x 1.5	27	22	315	4568
FDM0824	-8	1/2"	12.8	M24 x 1.5	30	23	250	3626
FDM0826	-8	1/2"	12.8	M26 x 1.5	32	24	250	3626
FDM1026	-10	5/8"	16	M26 x 1.5	32	24	250	3626
FDM1027	-10	5.8	16	M27 x 1.5	32	24	250	3626
FDM1226	-12	3/4"	19	M26 x 1.5	32	25	315	4568
FDM1227	-12	3/4"	19	M27 x 1.5	32	25	250	3626
* FDM1230	-12	3/4"	19	M30 x 1.5	36	26	200	2901
FDM1233	-12	3/4"	19	M33 x 2	38	27.5	160	2320
* FDM1638	-16	1"	25.4	M38 x 1.5	46	37	125	1813
* FDM2045	-20	1.1/4"	31.8	M45 x 1.5	50	32	125	1813
* FDM2452	-24	1.1/2"	38.1	M52 x 1.5	60	38.5	125	1813


METRIC FEMALE - 90° ELBOW (1)

FEMMINA 90° METRICA SV 60°

FEMELLE 90° MÉTRIQUE CÔNE 60°

DKM 90° BOGEN 60° KONUS

HEMBRA GIRATORIA A 90° MÉTRICA CONO 60°

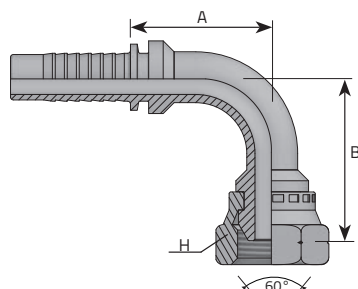


	Code	Tube			Thread	Dimensions			Pressure	
		D.N.	Hose	Diam		H	B	A	Bar	Psi
Inch		Inch		mm	mm	mm	mm	mm		
	F90M0310	-3	3/16"	4.8	M10 x 1	15	29	23	350	5076
	F90M0312	-3	3/16"	4.8	M12 x 1.5	17	29	23	350	5076
	F90M0410	-4	1/4"	6.4	M10 x 1	15	29	23	350	5076
	F90M0412	-4	1/4"	6.4	M12 x 1.5	17	29	23	350	5076
	F90M0414	-4	1/4"	6.4	M14 x 1.5	19	29	23	350	5076
	F90M0416	-4	1/4"	6.4	M16 x 1.5	22	32	23	350	5076
	F90M0418	-4	1/4"	6.4	M18 x 1.5	22	32	23	350	5076
	F90M0514	-5	5/16"	7.9	M14 x 1.5	19	33.5	31.5	350	5076
	F90M0516	-5	5/16"	7.9	M16 x 1.5	22	35.5	31.5	350	5076
	F90M0518	-5	5/16"	7.9	M18 x 1.5	22	35.5	31.5	350	5076
	F90M0614	-6	3/8"	9.5	M14 x 1.5	19	37	33	350	5076
	F90M0616	-6	3/8"	9.5	M16 x 1.5	22	38	33	350	5076
	F90M0618	-6	3/8"	9.5	M18 x 1.5	22	38	33	350	5076
	F90M0620	-6	3/8"	9.5	M20 x 1.5	27	42	33	315	4568
	F90M0622	-6	3/8"	9.5	M22 x 1.5	27	42	33	315	4568
	F90M0818	-8	1/2"	12.8	M18 x 1.5	24	43	39	315	4568

METRIC FEMALE - 90° ELBOW (2)

FEMMINA 90° METRICA SV 60°
 FEMELLE 90° MÉTRIQUE CÔNE 60°
 DKM 90° BOGEN 60° KONUS
 HEMBRA MÉTRICA CODO 90° ASIENTO 60°

* REMOVABLE NUT + SPHERICAL SEATING
 DADO SFILABILE + OGIVA SFERICA



Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		H	B	A	Bar	Psi
	Inch		mm		mm	mm	mm		
F90M0820	-8	1/2"	12.8	M20 x 1.5	27	45	39	315	4568
F90M0822	-8	1/2"	12.8	M22 x 1.5	27	45	39	315	4568
F90M0824	-8	1/2"	12.8	M24 x 1.5	30	47	39	250	3626
F90M0826	-8	1/2"	12.8	M26 x 1.5	32	51	39	250	3626
F90M1026	-10	5/8"	16	M26 x 1.5	32	56	49	250	3626
F90M1027	-10	5/8"	16	M27 x 1.5	32	56	49	250	3626
F90M1226	-12	3/4"	19	M26 x 1.5	32	59	53.5	250	3626
F90M1227	-12	3/4"	19	M27 x 1.5	32	59	53.5	250	3626
* F90M1230	-12	3/4"	19	M30 x 1.5	36	63	53.5	-	-
* F90M1638	-16	1"	25.4	M38 x 1.5	46	72	73	-	-
* F90M2045	-20	1.1/4"	31.8	M45 x 1.5	50	89	93	-	-
* F90M2452	-24	1.1/2"	38.1	M52 x 1.5	55	110	99	-	-


METRIC FEMALE - 45° ELBOW (1)

FEMMINA 45° METRICA SV 60°

FEMELLE 45° MÉTRIQUE CÔNE 60°

DKM 45° BOGEN 60° KONUS

HEMBRA GIRATORIA A 45° MÉTRICA CONO 60°

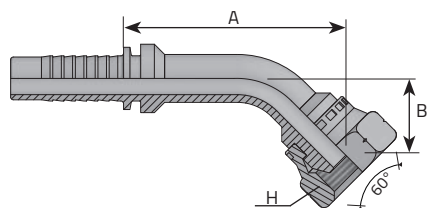


Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		H	B	A	Bar	Psi
	Inch		mm		mm	mm	mm		
F45M0310	-3	3/16"	4.8	M10 x 1	15	17	40	350	5076
F45M0312	-3	3/16"	4.8	M12 x 1.5	17	17	40	350	5076
F45M0410	-4	1/4"	6.4	M10 x 1	15	17	40	350	5076
F45M0412	-4	1/4"	6.4	M12 x 1.5	17	17	40	350	5076
F45M0414	-4	1/4"	6.4	M14 x 1.5	19	17	40	350	5076
F45M0416	-4	1/4"	6.4	M16 x 1.5	22	20	43	350	5076
F45M0418	-4	1/4"	6.4	M18 x 1.5	22	20	43	350	5076
F45M0514	-5	5/16"	7.9	M14 x 1.5	19	17	40	350	5076
F45M0516	-5	5/16"	7.9	M16 x 1.5	22	20	43	350	5076
F45M0518	-5	5/16"	7.9	M18 x 1.5	22	20	43	350	5076
F45M0614	-6	3/8"	9.5	M14 x 1.5	19	20	55	350	5076
F45M0616	-6	3/8"	9.5	M16 x 1.5	22	20	55	350	5076
F45M0618	-6	3/8"	9.5	M18 x 1.5	22	20	55	350	5076
F45M0620	-6	3/8"	9.5	M20 x 1.5	27	23	58	315	4568
F45M0622	-6	3/8"	9.5	M22 x 1.5	27	23	58	315	4568
F45M0818	-8	1/2"	12.8	M18 x 1.5	24	23	65	315	4568

METRIC FEMALE - 45° ELBOW (2)

FEMMINA 45° METRICA SV 60°
 FEMELLE 45° MÉTRIQUE CÔNE 60°
 DKM 45° BOGEN 60° KONUS
 HEMBRA GIRATORIA A 45° MÉTRICA CONO 60°


* REMOVABLE NUT + SPHERICAL SEATING
 DADO SFILABILE + OGIVA SFERICA

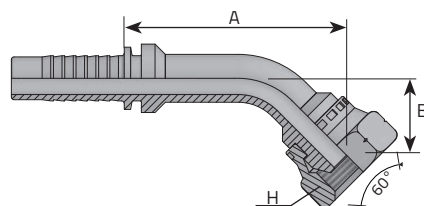

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	H	B	A	Bar	Psi
		Inch	mm	mm	mm	mm	mm		
F45M0820	-8	1/2"	12.8	M20 x 1.5	27	23	65	315	4568
F45M0822	-8	1/2"	12.8	M22 x 1.5	27	23	65	315	4568
F45M0824	-8	1/2"	12.8	M24 x 1.5	30	21	66	250	3626
F45M0826	-8	1/2"	12.8	M26 x 1.5	32	21	66	250	3626
F45M1026	-10	5/8"	16	M26 x 1.5	32	26	64	250	3626
F45M1027	-10	5/8"	16	M27 x 1.5	32	26	64	250	3626
F45M1226	-12	3/4"	19	M26 x 1.5	32	29	63	250	3626
F45M1227	-12	3/4"	19	M27 x 1.5	32	29	63	250	3626
* F45M1230	-12	3/4"	19	M30 x 1.5	36	31	65	-	-
* F45M1638	-16	1"	25.4	M38 x 1.5	46	41	90	-	-
* F45M2045	-20	1.1/4"	31.8	M45 x 1.5	50	45	103	-	-
* F45M2452	-24	1.1/2"	38.1	M52 x 1.5	55	53	119	-	-

METRIC MALE 24° CONE - L TYPE (1)


MASCHIO METRICO 24° DKOL
 MÂLE MÉTRIQUE CÔNE 24° - SÉRIE L
 CEL 24° KONUS METRISCH
 MACHO MÉTRICO CONO 24° - SERIE L

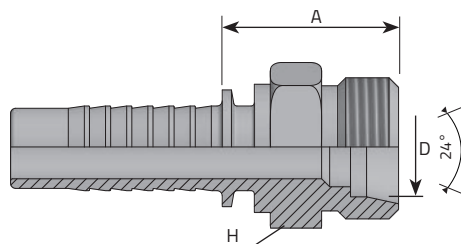

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	H	A	Bar	Psi
	Inch		mm		mm	mm	mm		
ME0312L6	-3	3/16"	4.8	M12 x 1.5	6	14	22.5	250	3626
ME0314L8	-3	3/16"	4.8	M14 x 1.5	8	15	23	250	3626
ME0412L6	-4	1/4"	6.4	M12 x 1.5	6	14	23	250	3626
ME0414L8	-4	1/4"	6.4	M14 x 1.5	8	15	23	250	3626
ME0416L10	-4	1/4"	6.4	M16 x 1.5	10	17	25	250	3626
ME0418L12	-4	1/4"	6.4	M18 x 1.5	12	19	26	250	3626
ME0514L8	-5	5/16"	7.9	M14 x 1.5	8	15	23	250	3626
ME0516L10	-5	5/16"	7.9	M16 x 1.5	10	17	25	250	3626
ME0518L12	-5	5/16"	7.9	M18 x 1.5	12	19	26	250	3626
ME0616L10	-6	3/8"	9.5	M16 x 1.5	10	17	25	250	3626
ME0618L12	-6	3/8"	9.5	M18 x 1.5	12	19	25	250	3626
ME0622L15	-6	3/8"	9.5	M22 x 1.5	15	24	27	250	3626
ME0818L12	-8	1/2"	12.8	M18 x 1.5	12	22	26	250	3626
ME0822L15	-8	1/2"	12.8	M22 x 1.5	15	24	27.5	250	3626
ME0826L18	-8	1/2"	12.8	M26 x 1.5	18	27	27.5	160	2320
ME1026L18	-10	5/8"	16	M26 x 1.5	18	27	27.5	160	2320

METRIC MALE 24° CONE - L TYPE (2)

MASCHIO METRICO 24° DKOL
 MÂLE MÉTRIQUE CÔNE 24° - SÉRIE L
 CEL 24° KONUS METRISCH
 MACHO MÉTRICO CONO 24° - SERIE L

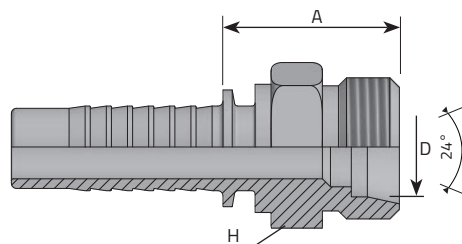

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	H	A	Bar	Psi
	Inch		mm	mm	mm	mm	mm		
ME1030L22	-10	5/8"	16	M30 x 2	22	32	31.5	160	2320
ME1226L18	-12	3/4"	19	M26 x 1.5	18	27	29	160	2320
ME1230L22	-12	3/4"	19	M30 x 2	22	32	32	160	2320
ME1636L28	-16	1"	25.4	M36 x 2	28	38	40	100	1450
ME2045L35	-20	1.1/4"	31.8	M45 x 2	35	46	41.5	100	1450
ME2452L42	-24	1.1/2"	38.1	M52 x 2	42	55	40	100	1450

METRIC FEMALE 24° CONE - L TYPE (1)


FEMMINA 90° METRICA DKOL CON O-RING 24°

FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L

DKO-L 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS

HEMBRA GIRATORIA MÉTRICA CON O-RING CONO 24° - SERIE L

* CRIMPED NUT
DADO PINZATO

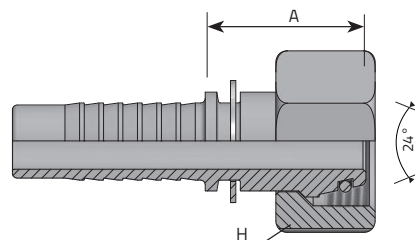


Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	H	A	Bar	Psi
	Inch		mm		mm	mm	mm		
FE0312L6	-3	3/16"	4.8	M12 x 1.5	6	14	25.5	250	3626
FE0314L8	-3	3/16"	4.8	M14 x 1.5	8	17	25.5	250	3626
* FE0412L6	-4	1/4"	6.4	M12 x 1.5	6	17	21	250	3626
FE0414L8	-4	1/4"	6.4	M14 x 1.5	8	17	23.5	250	3626
FE0416L10	-4	1/4"	6.4	M16 x 1.5	10	19	26	250	3626
FE0418L12	-4	1/4"	6.4	M18 x 1.5	12	22	26	250	3626
* FE0514L8	-5	5/16"	7.9	M14 x 1.5	8	19	21.5	250	3626
FE0516L10	-5	5/16"	7.9	M16 x 1.5	10	19	26	250	3626
FE0518L12	-5	5/16"	7.9	M18 x 1.5	12	22	26	250	3626
* FE0616L10	-6	3/8"	9.5	M16 x 1.5	10	19	23.5	250	3626
FE0618L12	-6	3/8"	9.5	M18 x 1.5	12	22	26.5	250	3626
FE0622L15	-6	3/8"	9.5	M22 x 1.5	15	27	27	250	3626
* FE0818L12	-8	1/2"	12.8	M18 x 1.5	12	22	25.5	250	3626
FE0822L15	-8	1/2"	12.8	M22 x 1.5	15	27	27.5	250	3626
FE0826L18	-8	1/2"	12.8	M26 x 1.5	18	32	28	160	2320
FE1026L18	-10	5/8"	16	M26 x 1.5	18	32	30	160	2320

METRIC FEMALE 24° CONE - L TYPE (2)

FEMMINA 90° METRICA DKOL CON O-RING 24°
 FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L
 DKO-L 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA GIRATORIA MÉTRICA CON O-RING CONO 24° - SERIE L

* CRIMPED NUT
 DADO PINZATO

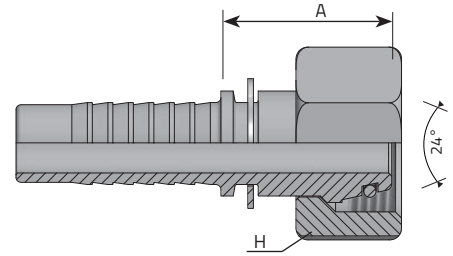

	Code	Tube			Thread	Dimensions			Pressure	
		D.N.	Hose	Diam		D	H	A		
		Inch		mm	mm	mm	mm	mm	Bar	Psi
	FE1030L22	-10	5/8"	16	M30 x 2	22	36	31	160	2320
*	FE1226L18	-12	3/4"	19	M26 x 1.5	18	32	29	160	2320
	FE1230L22	-12	3/4"	19	M30 x 2	22	36	31	160	2320
	FE1636L28	-16	1"	25.4	M36 x 2	28	41	33.5	100	1450
	FE2045L35	-20	1.1/4"	31.8	M45 x 2	35	50	38.5	100	1450
	FE2452L42	-24	1.1/2"	38.1	M52 x 2	42	60	39	100	1450


METRIC FEMALE 24° CONE - 90° ELBOW - L TYPE (1)

FEMMINA 90° METRICA DKOL CON O-RING 24°

FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L

DKO-L 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS

HEMBRA GIRATORIA A 90° MÉTRICA CON O-RING CONO 24° - SERIE L

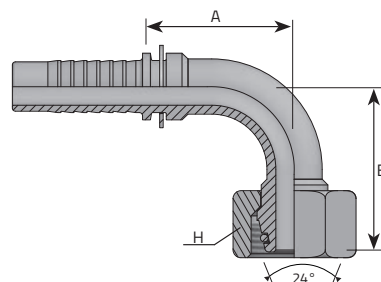


* CRIMPED NUT
DADO PINZATO

Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	H	B	A	Bar	Psi
	Inch		mm		mm	mm	mm	mm		
F90E0312L6	-3	3/16"	4.8	M12 x 1.5	6	14	31.5	29.5	250	3626
F90E0314L8	-3	3/16"	4.8	M14 x 1.5	8	17	31.5	29.5	250	3626
* F90E0412L6	-4	1/4"	6.4	M12 x 1.5	6	17	31.5	29.5	250	3626
F90E0414L8	-4	1/4"	6.4	M14 x 1.5	8	17	31.5	29.5	250	3626
F90E0416L10	-4	1/4"	6.4	M16 x 1.5	10	19	32.5	29	250	3626
F90E0418L12	-4	1/4"	6.4	M18 x 1.5	12	22	30.5	27	250	3626
* F90E0514L8	-5	5/16"	7.9	M14 x 1.5	8	19	36.7	31.5	250	3626
F90E0516L10	-5	5/16"	7.9	M16 x 1.5	10	19	32.5	31	250	3626
F90E0518L12	-5	5/16"	7.9	M18 x 1.5	12	22	37	29	250	3626
* F90E0616L10	-6	3/8"	9.5	M16 x 1.5	10	19	38	33	250	3626
F90E0618L12	-6	3/8"	9.5	M18 x 1.5	12	22	37.5	35.5	250	3626
F90E0622L15	-6	3/8"	9.5	M22 x 1.5	15	27	42	34	250	3626
* F90E0818L12	-8	1/2"	12.8	M18 x 1.5	12	22	49	39	250	3626
F90E0822L15	-8	1/2"	12.8	M22 x 1.5	15	27	44	39.5	250	3626
F90E0826L18	-8	1/2"	12.8	M26 x 1.5	18	32	46.5	39.5	160	2320

METRIC FEMALE 24° CONE - 90° ELBOW - L TYPE (2)

FEMMINA 90° METRICA DKOL CON O-RING 24°
 FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L
 DKO-L 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA GIRATORIA A 90° MÉTRICA CON O-RING CONO 24° - SERIE L

* CRIMPED NUT
 DADO PINZATO

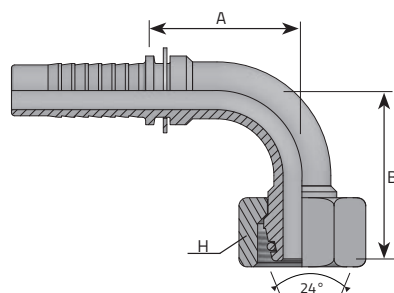


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	H	B	A	Bar	Psi
	Inch		mm		mm	mm	mm	mm		
F90E1026L18	-10	5/8"	16	M26 x 1.5	18	32	50.5	48.5	160	2320
F90E1030L22	-10	5/8"	16	M30 x 2	22	36	53	48.5	160	2320
* F90E1226L18	-12	3/4"	19	M26 x 1.5	18	32	63.5	53.5	160	2320
F90E1230L22	-12	3/4"	19	M30 x 2	22	36	55.5	56.5	160	2320
F90E1636L28	-16	1"	25.4	M36 x 2	28	41	72.5	73	100	1450
F90E2045L35	-20	1.1/4"	31.8	M45 x 2	35	50	86.5	92	100	1450
F90E2452L42	-24	1.1/2"	38.1	M52 x 2	42	60	94	99	100	1450

METRIC FEMALE 24° CONE -45° ELBOW - L TYPE (1)

FEMMINA 45° METRICA O-RING 24° DKOL CON O-RING
 FEMELLE 45° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L
 DKO-L 45° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA A 45° CON O-RING CONO 24° - SERIE L

* CRIMPED NUT
 DADO PINZATO

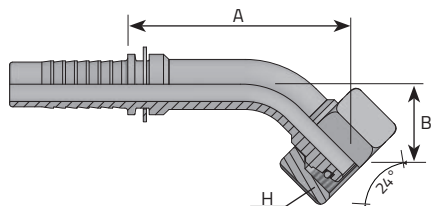


	Code	Tube			Thread	Dimensions				Pressure	
		D.N.	Hose	Diam		D	H	B	A	Bar	Psi
		Inch		mm		mm	mm	mm	mm		
	F45E0312L6	-3	3/16"	4.8	M12 x 1.5	6	14	15	37	250	3626
	F45E0314L8	-3	3/16"	4.8	M14 x 1.5	8	17	15	37	250	3626
*	F45E0412L6	-4	1/4"	6.4	M12 x 1.5	6	17	17	40	250	3626
	F45E0414L8	-4	1/4"	6.4	M14 x 1.5	8	17	17	50	250	3626
	F45E0416L10	-4	1/4"	6.4	M16 x 1.5	10	19	17	48.5	250	3626
	F45E0418L12	-4	1/4"	6.4	M18 x 1.5	12	22	17	48.5	250	3626
*	F45E0514L8	-5	5/16"	7.9	M14 x 1.5	8	19	23.2	51	250	3626
	F45E0516L10	-5	5/16"	7.9	M16 x 1.5	10	19	17	52.5	250	3626
	F45E0518L12	-5	5/16"	7.9	M18 x 1.5	12	22	20	50	250	3626
*	F45E0616L10	-6	3/8"	9.5	M16 x 1.5	10	19	20	55	250	3626
	F45E0618L12	-6	3/8"	9.5	M18 x 1.5	12	22	17	57	250	3626
	F45E0622L15	-6	3/8"	9.5	M22 x 1.5	15	27	19	59	250	3626
*	F45E0818L12	-8	1/2"	12.8	M18 x 1.5	12	22	27	65	250	3626
	F45E0822L15	-8	1/2"	12.8	M22 x 1.5	15	27	22	64	250	3626
	F45E0826L18	-8	1/2"	12.8	M26 x 1.5	18	32	26	65	160	2320

METRIC FEMALE 24° CONE - 45° ELBOW - L TYPE (2)

FEMMINA 45° METRICA O-RING 24° DKOL CON O-RING
 FEMELLE 45° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L
 DKO-L 45° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA A 45° CON O-RING CONO 24° - SERIE L


* CRIMPED NUT
 DADO PINZATO

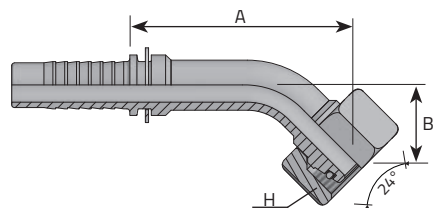

	Code	Tube				Thread				Dimensions				Pressure	
		D.N.	Hose	Diam	T					D	H	B	A		
		Inch		mm	mm					mm	mm	mm	mm	Bar	Psi
	F45E1026L18	-10	5/8"	16	M26 x 1.5					18	32	28	61.5	160	2320
	F45E1030L22	-10	5/8"	16	M30 x 2					22	36	30	63.5	160	2320
*	F45E1226L18	-12	3/4"	19	M26 x 1.5					18	32	33.5	63	160	2320
	F45E1230L22	-12	3/4"	19	M30 x 2					22	36	27	63	160	2320
	F45E1636L28	-16	1"	25.4	M36 x 2					28	41	38.5	85.5	100	1450
	F45E2045L35	-20	1.1/4"	31.8	M45 x 2					35	50	35	104.5	100	1450
	F45E2452L42	-24	1.1/2"	38.1	M52 x 2					42	60	45	119	100	1450

METRIC MALE 24° CONE - S TYPE (1)


MASCHIO METRICO 24° DKOS
 MÂLE MÉTRIQUE CÔNE 24° - SÉRIE S
 CES METRISCH 24° KONUS
 MACHO MÉTRICO CONO 24° - SERIE S

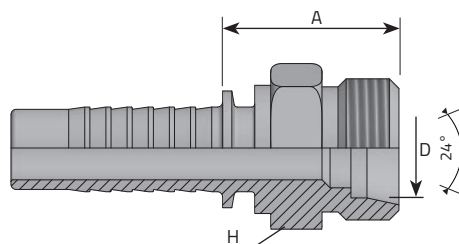

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	H	A	Bar	Psi
	Inch		mm		mm	mm	mm		
ME0314S6	-3	3/16"	4.8	M14 x 1.5	6	15	24	420	6091
ME0316S8	-3	3/16"	4.8	M16 x 1.5	8	17	25	420	6091
ME0414S6	-4	1/4"	6.4	M14 x 1.5	6	15	24	450	6526
ME0416S8	-4	1/4"	6.4	M16 x 1.5	8	17	25	450	6526
ME0418S10	-4	1/4"	6.4	M18 x 1.5	10	19	25	450	6526
ME0420S12	-4	1/4"	6.4	M20 x 1.5	12	22	27	450	6526
ME0518S10	-5	5/16"	7.9	M18 x 1.5	10	19	25	350	5076
ME0520S12	-5	5/16"	7.9	M20 x 1.5	12	22	26.5	350	5076
ME0618S10	-6	3/8"	9.5	M18 x 1.5	10	19	26	450	6526
ME0620S12	-6	3/8"	9.5	M20 x 1.5	12	22	27	450	6526
ME0622S14	-6	3/8"	9.5	M22 x 1.5	14	24	29	450	6526
ME0822S14	-8	1/2"	12.8	M22 x 1.5	14	24	30	420	6091
ME0824S16	-8	1/2"	12.8	M24 x 1.5	16	27	31	420	6091
ME1030S20	-10	5/8"	16	M30 x 2	20	32	33	350	5076
ME1230S20	-12	3/4"	19	M30 x 2	20	32	34	350	5076

METRIC MALE 24° CONE - S TYPE (2)

MASCHIO METRICO 24° DKOS
 MÂLE MÉTRIQUE CÔNE 24° - SÉRIE S
 CES METRISCH 24° KONUS
 MACHO MÉTRICO CONO 24° - SERIE S

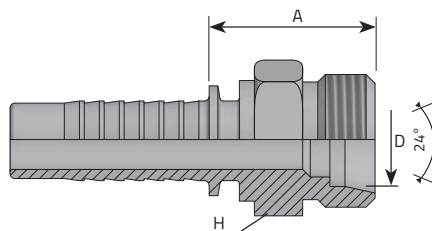


Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	D	H	A	Bar	Psi
	Inch		mm	mm	mm	mm	mm		
ME1236S25	-12	3/4"	19	M36 x 2	25	38	36	350	5076
ME1242S30	-12	3/4"	19	M42 x 2	30	-	-	350	5076
ME1636S25	-16	1"	25.4	M36 x 2	25	38	38.5	280	4061
ME1642S30	-16	1"	25.4	M42 x 2	30	46	42	280	4061
ME2042S30	-20	1.1/4"	31.8	M42 x 2	30	46	42	210	3046
ME2052S38	-20	1.1/4"	31.8	M52 x 2	38	55	46	210	3046
ME2452S38	-24	1.1/2"	38.1	M52 x 2	38	55	46	185	2683

METRIC FEMALE 24° CONE - S TYPE (1)

FEMMINA DIRITTA METRICA O-RING 24° DKOS
 FEMELLE DROIT MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S
 DKO-S INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA CONO 24° CON O-RING - SERIE S


* CRIMPED NUT
 DADO PINZATO

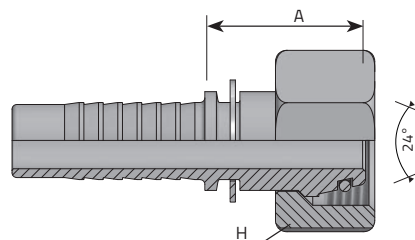

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	H	A	Bar	Psi
	Inch		mm		mm	mm	mm		
FE0314S6	-3	3/16"	4.8	M14 x 1.5	6	19	25.5	420	6091
FE0316S8	-3	3/16"	4.8	M16 x 1.5	8	19	25.5	420	6091
* FE0414S6	-4	1/4"	6.4	M14 x 1.5	6	17	25.5	450	6526
FE0416S8	-4	1/4"	6.4	M16 x 1.5	8	19	26	450	6526
FE0418S10	-4	1/4"	6.4	M18 x 1.5	10	22	26	450	6526
FE0420S12	-4	1/4"	6.4	M20 x 1.5	12	24	26	450	6526
FE0518S10	-5	5/16"	7.9	M18 x 1.5	10	22	26.5	350	5076
FE0520S12	-5	5/16"	7.9	M20 x 1.5	12	24	26	350	5076
* FE0618S10	-6	3/8"	9.5	M18 x 1.5	10	22	26.5	450	6526
FE0620S12	-6	3/8"	9.5	M20 x 1.5	12	24	26.5	450	6526
FE0622S14	-6	3/8"	9.5	M22 x 1.5	14	27	27	450	6526
FE0822S14	-8	1/2"	12.8	M22 x 1.5	14	27	27.5	420	6091
FE0824S16	-8	1/2"	12.8	M24 x 1.5	16	30	32	420	6091
FE1030S20	-10	5/8"	16	M30 x 2	20	36	37	350	5076
FE1230S20	-12	3/4"	9.5	M30 x 2	20	36	37.5	350	5076

METRIC FEMALE 24° CONE - S TYPE (2)

FEMMINA DIRITTA METRICA O-RING 24° DKOS
 FEMELLE DROIT MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S
 DKO-S INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA CONO 24° CON O-RING - SERIE S

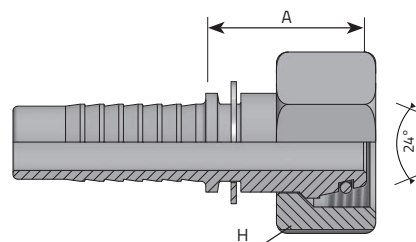

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	H	A	Bar	Psi
	Inch	mm	mm		mm	mm	mm		
FE1236S25	-12	3/4"	19	M36 x 2	25	46	38.5	350	5076
FE1636S25	-16	1"	25.4	M36 x 2	25	46	39.5	280	4061
FE1642S30	-16	1"	25.4	M42 x 2	30	50	40.5	280	4061
FE2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	41.5	210	3046
FE2052S38	-20	1.1/4"	31.8	M52 x 2	38	60	47	210	3046
FE2452S38	-24	1.1/2"	38.1	M52 x 2	38	60	47	185	2683

METRIC FEMALE 24° CONE - 90° ELBOW - S TYPE (1)


FEMMINA 90° METRICA O-RING 24° DKOS

FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S

DKO-S 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS

HEMBRA MÉTRICA A 90° CON O-RING CONO 24° - SERIE S

* CRIMPED NUT
DADO PINZATO

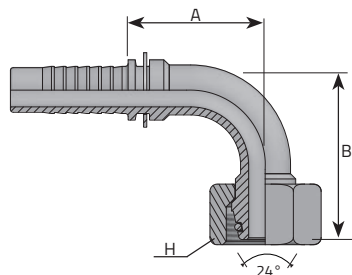

Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	H	B	A	Bar	Psi
	Inch		mm		mm	mm	mm	mm		
F90E0314S6	-3	3/16"	4.8	M14 x 1.5	6	19	31.5	29.5	420	6091
F90E0316S8	-3	3/16"	4.8	M16 x 1.5	8	19	31.5	29.5	420	6091
* F90E0414S6	-4	1/4"	6.4	M14 x 1.5	6	17	31.5	29.5	450	6526
F90E0416S8	-4	1/4"	6.4	M16 x 1.5	8	19	31.5	29.5	450	6526
F90E0418S10	-4	1/4"	6.4	M18 x 1.5	10	22	32.5	29	450	6526
F90E0420S12	-4	1/4"	6.4	M20 x 1.5	12	24	30.5	27	450	6526
F90E0518S10	-5	5/16"	7.9	M18 x 1.5	10	22	32.5	31	350	5076
F90E0520S12	-5	5/16"	7.9	M20 x 1.5	12	24	37	29	350	5076
* F90E0618S10	-6	3/8"	9.5	M18 x 1.5	10	22	38	33	450	6526
F90E0620S12	-6	3/8"	9.5	M20 x 1.5	12	24	37.5	35.5	450	6526
F90E0622S14	-6	3/8"	9.5	M22 x 1.5	14	27	42	34	450	6526
F90E0822S14	-8	1/2"	12.8	M22 x 1.5	14	27	44	39.5	420	6091
F90E0824S16	-8	1/2"	12.8	M24 x 1.5	16	30	45	39.5	420	6091
F90E1030S20	-10	5/8"	16	M30 x 2	20	36	56	48.5	350	5076
F90E1230S20	-12	3/4"	19	M30 x 2	20	36	59	56.5	350	5076


METRIC FEMALE 24° CONE - 90° ELBOW - S TYPE (2)

FEMMINA 90° METRICA O-RING 24° DKOS

FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S

DKO-S 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS

HEMBRA MÉTRICA A 90° CON O-RING CONO 24° - SERIE S



Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	H	B	A	Bar	Psi
	Inch		mm		mm	mm	mm	mm		
F90E1236S25	-12	3/4"	19	M36 x 2	25	46	59	56.5	350	5076
F90E1636S25	-16	1"	25.4	M36 x 2	25	46	75	73	280	4061
F90E1642S30	-16	1"	25.4	M42 x 2	30	50	75	73	280	4061
F90E2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	86	92	210	3046
F90E2052S38	-20	1.1/4"	31.8	M52 x 2	38	60	86	92	210	3046
F90E2452S38	-24	1.1/2"	38.1	M52 x 2	38	60	94	99	185	2683

METRIC FEMALE 24° CONE - 45° ELBOW - S TYPE (1)


FEMMINA 45° METRICA O-RING 24° DKOS

FEMELLE 45° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S

DKO-S 45° BOGEN INNENGEWINDE MIT O-RING 24° KONUS

HEMBRA MÉTRICA A 45° CON O-RING CONO 24° - SERIE S

* CRIMPED NUT
DADO PINZATO

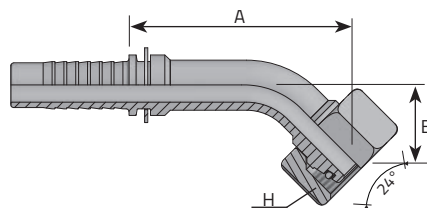

	Code	Tube			Thread	Dimensions				Pressure	
		D.N.	Hose	Diam		D	H	B	A	Bar	Psi
		Inch		mm		mm	mm	mm	mm		
	F45E0314S6	-3	3/16"	4.8	M14 x 1.5	6	19	15	37	420	6091
	F45E0316S8	-3	3/16"	4.8	M16 x 1.5	8	19	15	37	420	6091
*	F45E0414S6	-4	1/4"	6.4	M14 x 1.5	6	17	17	40	450	6526
	F45E0416S8	-4	1/4"	6.4	M16 x 1.5	8	19	17	50	450	6526
	F45E0418S10	-4	1/4"	6.4	M18 x 1.5	10	22	17	48.5	450	6526
	F45E0420S12	-4	1/4"	6.4	M20 x 1.5	12	24	17	48.5	450	6526
	F45E0518S10	-5	5/16"	7.9	M18 x 1.5	10	22	17	52.5	350	5076
	F45E0520S12	-5	5/16"	7.9	M20 x 1.5	12	24	20	50	350	5076
*	F45E0618S10	-6	3/8"	9.5	M18 x 1.5	10	22	20	55	450	6526
	F45E0620S12	-6	3/8"	9.5	M20 x 1.5	12	24	17	57	450	6526
	F45E0622S14	-6	3/8"	9.5	M22 x 1.5	14	27	19	59	450	6526
	F45E0822S14	-8	1/2"	12.8	M22 x 1.5	14	27	22	65	420	6091
	F45E0824S16	-8	1/2"	12.8	M24 x 1.5	16	30	22	66.5	420	6091
	F45E1030S20	-10	5/8"	16	M30 x 2	20	36	26	64.5	350	5076
	F45E1230S20	-12	3/4"	19	M30 x 2	20	36	27	64	350	5076


METRIC FEMALE 24° CONE 45° - S TYPE (2)

FEMMINA 45° METRICA O-RING 24° DKOS

FEMELLE 45° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S

DKO-S 45° BOGEN INNENGEWINDE MIT O-RING 24° KONUS


HEMBRA MÉTRICA A 45° CON O-RING CONO 24° - SERIE S

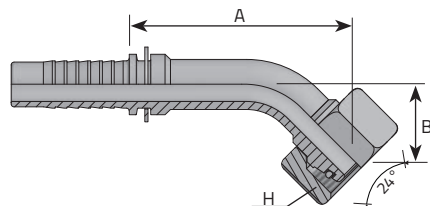

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	D	H	B	A	Bar	Psi
	Inch		mm	mm	mm	mm	mm	mm		
F45E1236S25	-12	3/4"	19	M36 x 2	25	46	28	70	350	5076
F45E1636S25	-16	1"	25.4	M36 x 2	25	46	38	88.5	280	4061
F45E1642S30	-16	1"	25.4	M42 x 2	30	50	38	89	280	4061
F45E2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	35	104.5	210	3046
F45E2052S38	-20	1.1/4"	31.8	M52 x 2	38	60	35	104.5	210	3046
F45E2452S38	-24	1.1/2"	38.1	M52 x 2	38	60	45	119	185	2683

STANDPIPE (1)


ERMETO DIRITTO
EMBOUT LISSE DROIT
ROHRSTUTZEN BEL - BES
ESPIGA LISA RECTA

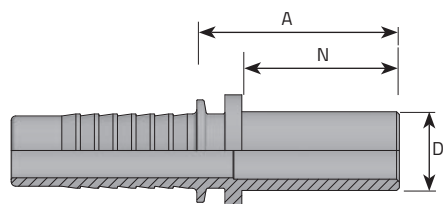

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	N	A	Bar	Psi
	Inch		mm		mm	mm	mm		
PDL0306	-3	3/16"	4.8		6	24	30	415	6019
PDL0308	-3	3/16"	4.8		8	24	30	415	6019
PDL0406	-4	1/4"	6.4		6	22.5	30.5	320	4641
PDL0408	-4	1/4"	6.4		8	23	30.5	450	6526
PDL0410	-4	1/4"	6.4		10	25	32	450	6526
PDL0412	-4	1/4"	6.4		12	25	32	450	6526
PDL0508	-5	5/16"	7.9		8	23	30	-	
PDL0510	-5	5/16"	7.9		10	25	32	350	5076
PDL0512	-5	5/16"	7.9		12	25	32	350	5076
PDL0610	-6	3/8"	9.5		10	25.5	33	330	4786
PDL0612	-6	3/8"	9.5		12	25	32.5	445	6454
PDL0614	-6	3/8"	9.5		14	28	35.5	445	6454
PDL0615	-6	3/8"	9.5		15	25.5	33	250	3626
PDL0812	-8	1/2"	12.8		12	25	33	-	
PDL0814	-8	1/2"	12.8		14	28	36	275	3988
PDL0815	-8	1/2"	12.8		15	25.5	33.5	250	3626
PDL0816	-8	1/2"	12.8		16	31	39	415	6019
PDL0818	-8	1/2"	12.8		18	27	35.5	160	2320

STANDPIPE (2)


ERMETO DIRITTO
EMBOUT LISSE DROIT
ROHRSTUTZEN BEL - BES
ESPIGA LISA RECTA

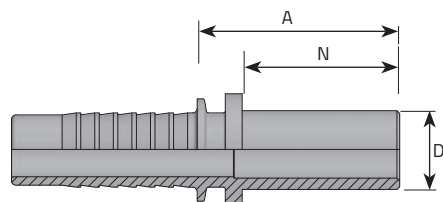

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	N	A	Bar	Psi
		Inch	mm		mm	mm	mm		
PDL1018	-10	5/8"	16		18	28	36	160	2320
PDL1020	-10	5/8"	16		20	35	43.5	350	5076
PDL1022	-10	5/8"	16		22	29	38	160	2320
PDL1218	-12	3/4"	19		18	26	34.5	160	2320
PDL1220	-12	3/4"	19		20	35	44	215	3118
PDL1222	-12	3/4"	19		22	29.5	38	160	2320
PDL1225	-12	3/4"	19		25	41	51	350	5076
PDL1625	-16	1"	25.4		25	39.5	50	165	2393
PDL1628	-16	1"	25.4		28	30.5	41	100	1450
PDL1630	-16	1"	25.4		30	43.5	54	250	3626
PDL2030	-20	1.1/4"	31.8		30	43	54.5	210	3046
PDL2035	-20	1.1/4"	31.8		35	35.5	46.5	100	1450
PDL2038	-20	1.1/4"	31.8		38	48	60	210	3046
PDL2438	-24	1.1/2"	38.1		38	48	60	170	2466
PDL2442	-24	1.1/2"	38.1		42	36	47	100	1450

STANDPIPE 90° ELBOW


ERMETO 90°
EMBOUT LISSE 90°
BEL / S 90°
CODO 90°



Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	A	B	Bar	Psi
	Inch	mm	mm		mm	mm	mm		
P90L0306	-3	3/16"	4.8		6	25	41.5	415	6019
P90L0406	-4	1/4"	6.4		6	25	43	415	6019
P90L0408	-4	1/4"	6.4		8	24	43	450	6526
P90L0510	-5	5/16"	7.9		10	32	51	350	5076
P90L0612	-6	3/8"	9.5		12	33	53	445	6454
P90L0815	-8	1/2"	12.8		15	39	60.5	250	3626
P90L1018	-10	5/8"	16		18	49	69	160	2320
P90L1222	-12	3/4"	19		22	58	76	160	2320
P90L1628	-16	1"	25.4		28	74	88	100	1450

STANDPIPE 45° ELBOW


ERMETO 45°
EMBOUT LISSE 45°
BEL / S 45°
CODO 45°

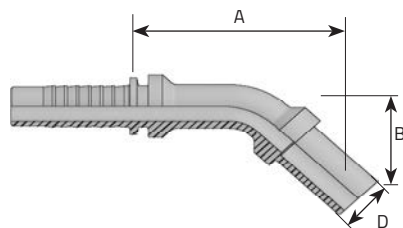

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	A	B	Bar	Psi
		Inch	mm		mm	mm	mm		
P45L0306	-3	3/16"	4.8		6	-	-	415	6019
P45L0406	-3	1/4"	6.4		6	-	-	415	6019
P45L0408	-4	1/4"	6.4		8	-	-	450	6526
P45L0510	-5	5/16"	7.9		10	-	-	350	5076
P45L0612	-6	3/8"	9.5		12	-	-	445	6454
P45L0815	-8	1/2"	12.8		15	-	-	250	3626
P45L1018	-10	5/8"	16		18	-	-	160	2320
P45L1222	-12	3/4"	19		22	-	-	160	2320
P45L1628	-16	1"	25.4		28	-	-	100	1450

METRIC MALE FOR AGRICULTURE VALVES


MASCHIO METRICO PER VALVOLE AGRICOLE
MÉTRIQUE POUR VANNES AGRICOLES
METRISCHER STECKER FÜR LANDWIRTSCHAFTLICHE VENTILE
MACHO MÉTRICO PARA VALVULAS DE AGRICULTURA

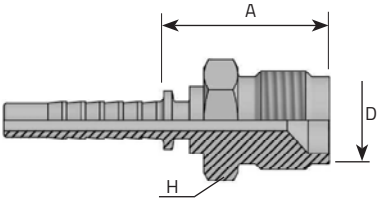

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	H	A	Bar	Psi
	Inch		mm		mm	mm	mm		
MAV0418	-4	1/4"	6.4	M18 x 1.5	12	19	29	400	5801
MAV0518	-5	5/16"	7.9	M18 x 1.5	12	19	29	350	5076
MAV0618	-6	3/8"	9.5	M18 x 1.5	12	19	29	350	5076

BSP BANJO (1)


OCCHIO BSP
BANJO VIS BSPP
RINGNIPPEL FÜR HOHLSCHRAUBE BSP/RNR
BANJO BSPP

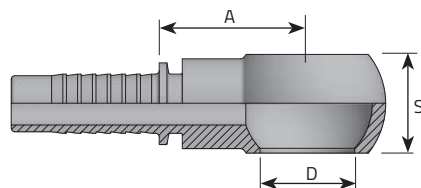

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	S	A	Bar	Psi
	Inch	mm	Inch		mm	mm	mm		
OG0302	-3	3/16"	4.8	1/8"	10	10	19.5		
OG0304	-3	3/16"	4.8	1/4"	13.2	14	22.5		
OG0402	-4	1/4"	6.4	1/8"	10	10	24		
OG0404	-4	1/4"	6.4	1/4"	13.2	14	23		
OG0406	-4	1/4"	6.4	3/8"	16.7	17	26.5		
OG0408	-4	1/4"	6.4	1/2"	21	22	32.5		
OG0504	-5	5/16"	7.9	1/4"	13.2	14	24		
OG0506	-5	5/16"	7.9	3/8"	16.7	17	26.5		
OG0508	-5	5/16"	7.9	1/2"	21	22	27.5		
OG0604	-6	3/8"	9.5	1/4"	13.2	14	31.5		
OG0606	-6	3/8"	9.5	3/8"	16.7	17	26.5		
OG0608	-6	3/8"	9.5	1/2"	21	22	27.5		
OG0806	-8	1/2"	12.8	3/8"	16.7	17	31		
OG0808	-8	1/2"	12.8	1/2"	21	22	33		
OG0810	-8	1/2"	12.8	5/8"	23.3	24	32.5		
OG0812	-8	1/2"	12.8	3/4"	26.5	30	34.5		

BSP BANJO (2)


OCCHIO BSP
BANJO VIS BSPP
RINGNIPPEL FÜR HOHLSCHRAUBE BSP/RNR
BANJO BSPP

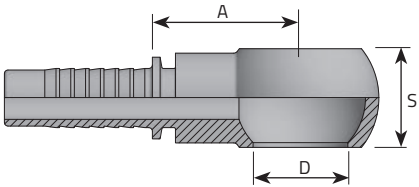

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	S	A	Bar	Psi
	Inch		mm	Inch	mm	mm	mm		
OG1008	-10	5/8"	16	1/2"	21	22	31.5		
OG1010	-10	5/8"	16	5/8"	23.3	24	32.5		
OG1012	-10	5/8"	16	3/4"	26.5	30	34.5		
OG1212	-12	3/4"	19	3/4"	26.5	30	35		
OG1216	-12	3/4"	19	1"	33.4	38	48		
OG1612	-16	1"	25.4	3/4"	-	-	-		
OG1616	-16	1"	25.4	1"	33.4	38	43		
OG2020	-20	1.1/4"	31.8	1.1/4"	42.1	47	57.7		

METRIC BANJO (1)


OCCHIO METRICO
BANJO VIS MÉTRIQUE
RINGNIPPEL FÜR HOHLSCHRAUBE METRISCH/RNM
BANJO MÉTRICO

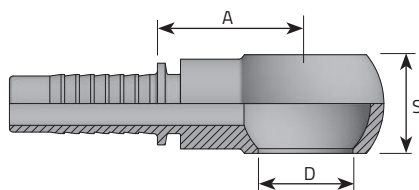

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	S	A	Bar	Psi
	Inch	mm	mm		mm	mm	mm		
OM0310	-3	3/16"	4.8	M10 x 1	10.1	10	19.5		
OM0312	-3	3/16"	4.8	M12 x 1.5	12.1	12	21		
OM0314	-3	3/16"	4.8	M14 x 1.5	14.1	14	23		
OM0410	-4	1/4"	6.4	M10 x 1	10.1	10	24		
OM0412	-4	1/4"	6.4	M12 x 1.5	12.1	11	23		
OM0414	-4	1/4"	6.4	M14 x 1.5	14.1	14	23		
OM0416	-4	1/4"	6.4	M16 x 1.5	16.1	17	25		
OM0418	-4	1/4"	6.4	M18 x 1.5	18.1	20	29		
OM0512	-5	5/16"	7.9	M12 x 1.5	12.1	12	23		
OM0514	-5	5/16"	7.9	M14 x 1.5	14.1	14	24.5		
OM0516	-5	5/16"	7.9	M16 x 1.5	16.1	17	27		
OM0518	-5	5/16"	7.9	M18 x 1.5	18.1	20	29		
OM0520	-5	5/16"	7.9	M20 x 1.5	20.1	22	28		
OM0522	-5	5/16"	7.9	M22 x 1.5	22.1	22	28		
OM0614	-6	3/8"	9.5	M14 x 1.5	14.1	14	27		
OM0616	-6	3/8"	9.5	M16 x 1.5	16.1	17	27		

METRIC BANJO (2)


OCCHIO METRICO
 BANJO VIS MÉTRIQUE
 RINGNIPPEL FÜR HOHLSCHRAUBE METRISCH/RNM
 BANJO MÉTRICO

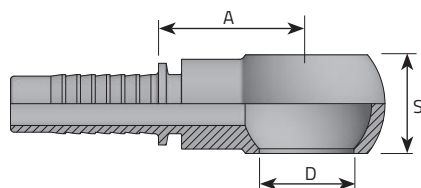

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	S	A	Bar	Psi
		Inch	mm	mm	mm	mm	mm		
OM0618	-6	3/8"	9.5	M18 x 1.5	18.1	20	28		
OM0620	-6	3/8"	9.5	M20 x 1.5	20.1	22	28.5		
OM0622	-6	3/8"	9.5	M22 x 1.5	22.1	22	28.5		
OM0818	-8	1/2"	12.8	M18 x 1.5	18.1	20	30		
OM0820	-8	1/2"	12.8	M20 x 1.5	20.1	22	34		
OM0822	-8	1/2"	12.8	M22 x 1.5	22.1	22	34		
OM0826	-8	1/2"	12.8	M26 x 1.5	26.5	30	34.5		
OM1022	-10	5/8"	16	M22 x 1.5	22.1	22	34		
OM1026	-10	5/8"	16	M26 x 1.5	26.5	30	34.5		
OM1226	-12	3/4"	19	M26 x 1.5	26.5	30	35		
OM1230	-12	3/4"	19	M30 x 1.5	30.1	36	41.5		
OM1630	-16	1"	25.4	M30 x 1.5	30.1	36	41.5		

METRIC MALE 24° CONE - FRENCH TYPE


MASCHIO METRICO SV 24°SERIE FRANCESE
 MÂLE MÉTRIQUE CÔNE 24° - SÉRIE FRANÇAIS
 AGF 24° INNENKONUS (FRANZÖSISCHE SERIE)
 MACHO MÉTRICO CONO 24° - SERIE FRANCESCA

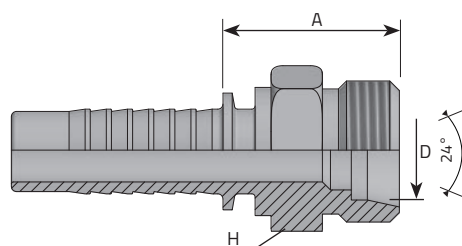

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	D	H	A		Bar	Psi
		Inch	mm	mm	mm	mm	mm			
ME0413F	-4	1/4"	6.4	M20x1.5	13	22	26.7			
ME0513F	-5	5/16"	7.9	M20x1.5	13	22	26.7			
ME0613F	-6	3/8"	9.5	M20x1.5	13	22	26.7			
ME0617F	-6	3/8"	9.5	M24x1.5	17	27	30.2			
ME0817F	-8	1/2"	12.8	M24x1.5	17	27	30.7			
ME0821F	-8	1/2"	12.8	M30x1.5	21	32	31.2			
ME1021F	-10	5/8"	16	M30x1.5	21	32	31.2			
ME1221F	-12	3/4"	19	M30x1.5	21	32	31.7			
ME1227F	-12	3/4"	19	M36x1.5	27	38	31.7			
ME1633F	-16	1"	25.4	M45x1.5	33	46	37.2			
ME2033F	-20	1.1/4"	31.8	M45x1.5	33	46	38.2			

METRIC FEMALE 24° CONE - FRENCH TYPE


FEMMINA METRICA SV 24°SERIE FRANCESE
 FEMÂLE MÉTRIQUE CÔNE 24° - SÉRIE FRANÇAIS
 DKF 24° INNENKONUS (FRANZÖSISCHE SERIE)
 HEMBRA MÉTRICO CONO 24° - SERIE FRANCESA

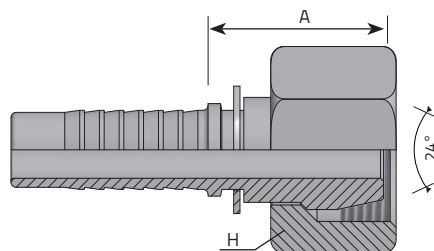

Code	Tube		Thread		Dimensions		Pressure	
	D.N.	Hose	Diam	T	H	A	Bar	Psi
		Inch	mm	mm	mm	mm		
FE0413F	-4	1/4"	6.4	M20 x 1.5	24	23.5		
FE0513F	-5	5/16"	7.9	M20 x 1.5	24	23.5		
FE0613F	-6	3/8"	9.5	M20 x 1.5	24	23.5		
FE0617F	-6	3/8"	9.5	M24 x 1.5	30	27		
FE0817F	-8	1/2"	12.8	M24 x 1.5	30	27.5		
FE0821F	-8	1/2"	12.8	M30 x 1.5	36	31		
FE1021F	-10	5/8"	16	M30 x 1.5	36	31		
FE1221F	-12	3/4"	19	M30 x 1.5	36	31.5		
FE1227F	-12	3/4"	19	M36 x 1.5	41	34		
FE1633F	-16	1"	25.4	M45 x 1.5	50	34		
FE2033F	-20	1.1/4"	31.8	M45 x 1.5	50	34		

METRIC FEMALE 24° CONE - 90° ELBOW - FRENCH TYPE

FEMMINA A 90° METRICA SV 24° SERIE FRANCESE
 FEMÂLE 90° MÉTRIQUE CÔNE 24° - SÉRIE FRANÇAIS
 DKF 90° BOGEN (FRANZÖSISCHE SERIE)
 HEMBRA GRATORIA MÉTRICA A 90° CONO 24° - SERIE FRANCESA

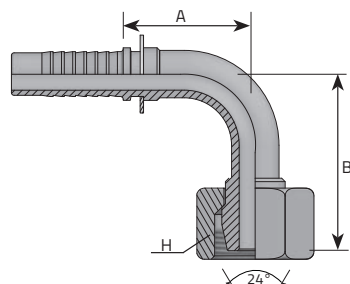

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		H	B	A	Bar	Psi
		Inch	mm		mm	mm	mm		
F90E0413F	-4	1/4"	6.4	M20x1.5	24	32.5	27		
F90E0513F	-5	5/16"	7.9	M20x1.5	24	39	29		
F90E0613F	-6	3/8"	9.5	M20x1.5	24	39.5	35.5		
F90E0617F	-6	3/8"	9.5	M24x1.5	30	48	36		
F90E0817F	-8	1/2"	12.8	M24x1.5	30	48	39.5		
F90E0821F	-8	1/2"	12.8	M30x1.5	36	61	45.5		
F90E1021F	-10	5/8"	16	M30x1.5	36	61	48.5		
F90E1221F	-12	3/4"	19	M30x1.5	36	64	56.5		
F90E1227F	-12	3/4"	19	M36x1.5	41	64	56.5		
F90E1633F	-16	1"	25.4	M45x1.5	50	91	86		
F90E2033F	-20	1.1/4"	31.8	M45x1.5	50	91	92		


METRIC FEMALE 24° CONE - 45° ELBOW - FRENCH TYPE

FEMMINA 45° METRICA SV 24° SERIE FRANCESE

FEMELLE 45° MÉTRIQUE CÔNE 24° - SÉRIE FRANÇAIS

DKF 45° BOGEN (FRANZÖSISCHE SERIE)


HEMBRA GIRATORIA MÉTRICA A 45° CONO 24° - SERIE FRANCESCA

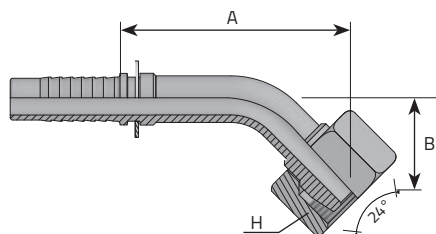

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		H	B	A	Bar	Psi
		Inch	mm		mm	mm	mm		
F45E0413F	-4	1/4"	6.4	M20 x 1.5	24	18.5	50		
F45E0513F	-5	5/16"	7.9	M20 x 1.5	24	21	52		
F45E0613F	-6	3/8"	9.5	M20 x 1.5	24	18.5	58.5		
F45E0617F	-6	3/8"	9.5	M24 x 1.5	30	24	65.5		
F45E0817F	-8	1/2"	12.8	M24 x 1.5	30	24	68.5		
F45E0821F	-8	1/2"	12.8	M30 x 1.5	36	29	68		
F45E1021F	-10	5/8"	16	M30 x 1.5	36	29	68		
F45E1221F	-12	3/4"	19	M30 x 1.5	36	30	69		
F45E1227F	-12	3/4"	19	M36 x 1.5	41	31	73		
F45E1633F	-16	1"	25.4	M45 x 1.5	50	36	101		
F45E2033F	-20	1.1/4"	31.8	M45 x 1.5	50	38	107		

STANDPIPE FRENCH TYPE


ERMETO DIRITTO FRANCESE
 EMBOUT LISSE DROIT - SÉRIE FRANÇAIS
 FRANZÖSISCHER ROHRSTUTZEN
 ESPIGA LISA RECTA METRICA - SERIE FRANCESA

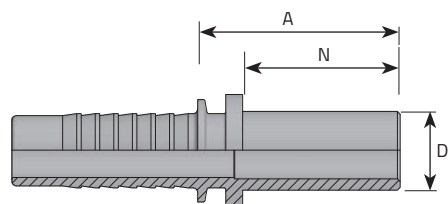

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	N	A	Bar	Psi
		Inch	mm		mm	mm	mm		
PDL0413F	-4	1/4"	6.4		13	22	29.5		
PDL0513F	-5	5/16"	7.9		13	22	29.5		
PDL0613F	-6	3/8"	9.5		13	22	29.5		
PDL0617F	-6	3/8"	9.5		17	24	31.5		
PDL0817F	-8	1/2"	12.8		17	24	32.5		
PDL0821F	-8	1/2"	12.8		21	26	34.5		
PDL1021F	-10	5/8"	16		21	26	34.5		
PDL1221F	-12	3/4"	19		21	26	35.3		
PDL1227F	-12	3/4"	19		26	25	34.3		
PDL1633F	-16	1"	25.4		33	27	37.3		
PDL2033F	-20	1.1/4"	31.8		33	27	38		

ORFS MALE

MASCHIO ORFS
 MÂLE ORFS
 AGF ORFS STIRNDICHTEND
 MACHO ORFS

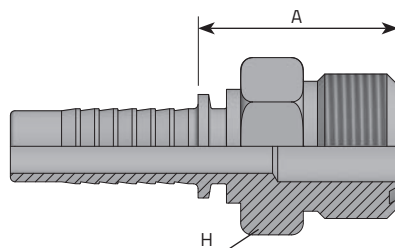


Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
	Inch		mm	Inch		mm	mm		
MORFS0406	-4	1/4"	6.4	9/16"	18	17	24	450	6526
MORFS0409	-4	1/4"	6.4	11/16"	16	19	27.5	450	6526
MORFS0509	-5	5/16"	7.9	11/16"	16	19	27.5	350	5076
MORFS0609	-6	3/8"	9.5	11/16"	16	19	27.5	445	6454
MORFS0611	-6	3/8"	9.5	13/16"	16	22	30.5	445	6454
MORFS0613	-6	3/8"	9.5	1"	14	27	33.5	445	6454
MORFS0811	-8	1/2"	12.8	13/16"	16	27	34	415	6019
MORFS0813	-8	1/2"	12.8	1"	14	27	31.5	415	6019
MORFS0814	-8	1/2"	12.8	1.3/16"	16	32	36	415	6019
MORFS1013	-10	5/8"	16	1"	14	27	34	350	5076
MORFS1014	-10	5/8"	16	1.3/16"	12	32	37	350	5076
MORFS1214	-12	3/4"	19	1.3/16"	12	32	38	350	5076
MORFS1215	-12	3/4"	19	1.7/16"	12	41	38.5	350	5076
MORFS1615	-16	1"	25.4	1.7/16"	12	41	39.5	280	4061
MORFS2021	-20	1.1/4"	31.8	1.11/16"	12	46	40	210	3046
MORFS2432	-24	1.1/2"	38.1	2"	12	55	43	185	2683

ORFS FEMALE

FEMMINA ORFS
FEMELLE DROIT ORFS
ORFS – UNF GEWINDE
HEMBRA RECTA ORFS

* CRIMPED NUT
DADO PINZATO

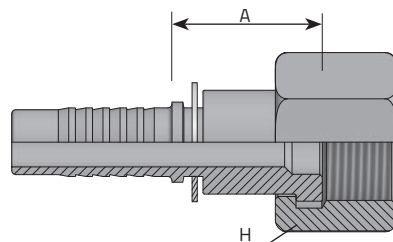

	Code	Tube			Thread		Dimensions		Pressure	
		D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch		mm	Inch		mm	mm		
	FORFS0406	-4	1/4"	6.4	9/16"	18	17	20.5	450	6526
	FORFS0409	-4	1/4"	6.4	11/16"	16	22	23	450	6526
	FORFS0411	-4	1/4"	6.4	13/16"	16	24	26	450	6526
	FORFS0509	-5	5/16"	7.9	11/16"	16	22	23	350	5076
*	FORFS0606	-6	3/8"	9.5	9/16"	18	19	25	445	6454
	FORFS0609	-6	3/8"	9.5	11/16"	16	22	23.5	445	6454
	FORFS0611	-6	3/8"	9.5	13/16"	16	24	26	445	6454
*	FORFS0809	-8	1/2"	12.8	11/16"	16	22	29	415	6019
	FORFS0811	-8	1/2"	12.8	13/16"	16	24	26.5	415	6019
	FORFS0813	-8	1/2"	12.8	1"	14	30	30	415	6019
	FORFS0814	-8	1/2"	12.8	1.3/16"	12	36	32.5	415	6019
	FORFS1013	-10	5/8"	16	1"	14	30	30	350	5076
	FORFS1014	-10	5/8"	16	1.3/16"	12	36	32	350	5076
	FORFS1214	-12	3/4"	19	1.3/16"	12	36	33	350	5076
	FORFS1215	-12	3/4"	19	1.7/16"	12	41	34	350	5076
*	FORFS1614	-16	1"	25.4	1.3/16"	12	36	38.5	280	4061
	FORFS1615	-16	1"	25.4	1.7/16"	12	41	35	280	4061
	FORFS1621	-16	1"	25.4	1.11/16"	12	50	35	210	3046
	FORFS2021	-20	1.1/4"	31.8	1.11/16"	12	50	35.5	210	3046
	FORFS2432	-24	1.1/2"	38.1	2"	12	60	37	185	2683


ORFS FEMALE (DOUBLE HEXAGON)

FEMMINA DIRITTA ORFS DOPPIO ESAGONO

FEMELLE DROIT ORFS

ORFS – UNF GEWINDE

HEMBRA GIRATORIA RECTA ORFS - DOBLE HEXAGONO

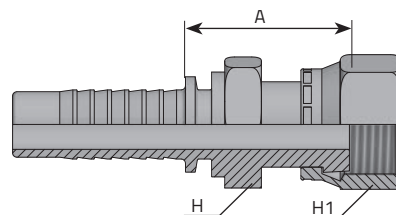


Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	A	Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm	mm		
FORFS0406GIR	-4	1/4"	6.4	9/16"	18	19	19	30	450	6526
FORFS0409GIR	-4	1/4"	6.4	11/16"	16	17	22	31.5	450	6526
FORFS0509GIR	-5	5/16"	7.9	11/16"	16	17	22	32	350	5076
FORFS0606GIR	-6	3/8"	9.5	9/16"	18	17	17	30.5	445	6453
FORFS0609GIR	-6	3/8"	9.5	11/16"	16	22	22	34	445	6453
FORFS0611GIR	-6	3/8"	9.5	13/16"	16	24	24	40.5	445	6453
FORFS0809GIR	-8	1/2"	12.8	11/16"	16	22	22	31.5	415	6018
FORFS0811GIR	-8	1/2"	12.8	13/16"	16	24	24	41	415	6018
FORFS0813GIR	-8	1/2"	12.8	1"	14	24	30	39	415	6018
FORFS0814GIR	-8	1/2"	12.8	1.3/16"	16	30	36	44	315	4568
FORFS1013GIR	-10	5/8"	16	1"	14	24	30	39	350	5076
FORFS1014GIR	-10	5/8"	16	1.3/16"	16	30	36	44	350	5076
FORFS1213GIR	-12	3/4"	19	1"	14	27	30	42	350	5076
FORFS1214GIR	-12	3/4"	19	1.3/16"	16	30	36	44.6	350	5076
FORFS1215GIR	-12	3/4"	19	1.7/16"	12	36	41	51.5	350	5076
FORFS1614GIR	-16	1"	25.4	1.3/16"	16	36	36	45.5	280	4061
FORFS1615GIR	-16	1"	25.4	1.7/16"	12	36	41	52.5	280	4061
FORFS1621GIR	-16	1"	25.4	1.11/16"	12	41	50	55	210	3045
FORFS2021GIR	-20	1.1/4"	31.8	1.11/16"	12	41	50	56	210	3045
FORFS2432GIR	-24	1.1/2"	38.1	2"	12	50	60	61.2	185	2683

ORFS FEMALE SWIVEL 90° ELBOW

FEMMINA 90° ORFS
FEMELLE 90° ORFS
DK 90° BOGEN ORFS UNF STIRNDICHTEND
HEMBRA GIRATORIA A 90° ORFS


* CRIMPED NUT
DADO PINZATO

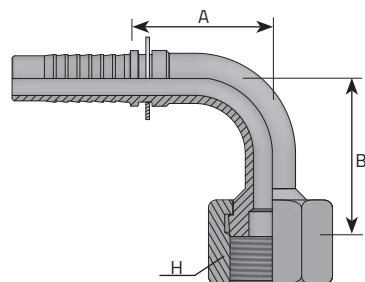

	Code	Tube		Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	B	A	
		Inch	mm	Inch		mm	mm	mm		Bar Psi
	F900RFS0406	-4	1/4"	6.4	9/16"	18	17	29.5	28	450 6526
	F900RFS0409	-4	1/4"	6.4	11/16"	16	22	30	28	450 6526
	F900RFS0411	-4	1/4"	6.4	13/16"	16	24	32	29.5	450 6526
	F900RFS0509	-5	5/16"	7.9	11/16"	16	22	29	29	350 5076
*	F900RFS0606	-6	3/8"	9.5	9/16"	18	19	44	32.5	445 6454
	F900RFS0609	-6	3/8"	9.5	11/16"	16	22	29	36	445 6454
	F900RFS0611	-6	3/8"	9.5	13/16"	16	24	32	34	445 6454
*	F900RFS0809	-8	1/2"	12.8	11/16"	16	22	51	40.5	415 6019
	F900RFS0811	-8	1/2"	12.8	13/16"	16	24	36	37.5	415 6019
	F900RFS0813	-8	1/2"	12.8	1"	14	30	39	39	415 6019
	F900RFS0814	-8	1/2"	12.8	1.3/16"	12	36	41	38	415 6019
	F900RFS1013	-10	5/8"	16	1"	14	30	43.5	51.5	350 5076
	F900RFS1014	-10	5/8"	16	1.3/16"	12	36	48	46.5	350 5076
	F900RFS1214	-12	3/4"	19	1.3/16"	12	36	49	56	350 5076
	F900RFS1215	-12	3/4"	19	1.7/16"	12	41	54	56.5	350 5076
*	F900RFS1614	-16	1"	25.4	1.3/16"	12	36	85	70	280 4061
	F900RFS1615	-16	1"	25.4	1.7/16"	12	41	59.5	74	280 4061
	F900RFS2021	-20	1.1/4"	31.8	1.11/16"	12	50	75.5	90	210 3046
	F900RFS2432	-24	1.1/2"	38.1	2"	12	60	84	99	185 2683

ORFS FEMALE SWIVEL - 90° ELBOW - LONG DROP

FEMMINA 90° ORFS LONG DROP
FEMELLE 90° ORFS
DK 90° BOGEN ORFS UNF STIRNDICHTEND
HEMBRA GIRATORIA A 90° ORFS




Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F900RFS0406LD	-4	1/4"	6.4	9/16"	18	17	45	26.5	450	6526
F900RFS0609LD	-6	3/8"	9.5	11/16"	16	22	51.5	32	445	6454
F900RFS0611LD	-6	3/8"	9.5	13/16"	16	24	51	36	445	6454
F900RFS0811LD	-8	1/2"	12.8	13/16"	16	24	63	37.5	415	6019
F900RFS0813LD	-8	1/2"	12.8	1"	14	30	64	37	415	6019
F900RFS1013LD	-10	5/8"	16	1"	14	30	63	45	350	5076
F900RFS1014LD	-10	5/8"	16	1.3/16"	12	36	71	45	350	5076
F900RFS1214LD	-12	3/4"	19	1.3/16"	12	36	90	51	350	5076
F900RFS1615LD	2-16	1"	25.4	1.7/16"	12	41	108	69	280	4061

ORFS FEMALE SWIVEL - 45° ELBOW

FEMMINA 45° ORFS
FEMELLE 45° ORFS
DK 45° BOGEN ORFS UNF STIRNDICHTEND
HEMBRA GIRATORIA A 45° ORFS

* CRIMPED NUT
DADO PINZATO

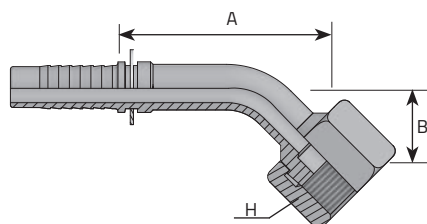

	Code	Tube		Thread		Dimensions				Pressure	
		D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch		mm	Inch		mm	mm	mm		
	F45ORFS0406	-4	1/4"	6.4	9/16"	18	17	15	45	450	6526
	F45ORFS0409	-4	1/4"	6.4	11/16"	16	22	15.5	45.5	450	6526
	F45ORFS0411	-4	1/4"	6.4	13/16"	16	24	18	49	450	6526
	F45ORFS0509	-5	5/16"	7.9	11/16"	16	22	15.5	46	350	5076
*	F45ORFS0606	-6	3/8"	9.5	9/16"	18	19	24	55	445	6454
	F45ORFS0609	-6	3/8"	9.5	11/16"	16	22	13	51	445	6454
	F45ORFS0611	-6	3/8"	9.5	13/16"	16	24	17	52	445	6454
*	F45ORFS0809	-8	1/2"	12.8	11/16"	16	22	26	72	415	6019
	F45ORFS0811	-8	1/2"	12.8	13/16"	16	24	18	58	415	6019
	F45ORFS0813	-8	1/2"	12.8	1"	14	30	20	61	415	6019
	F45ORFS0814	-8	1/2"	12.8	1.3/16"	12	36	24	62	415	6019
	F45ORFS1013	-10	5/8"	16	1"	14	30	20	55	350	5076
	F45ORFS1014	-10	5/8"	16	1.3/16"	12	36	21	57	350	5076
	F45ORFS1214	-12	3/4"	19	1.3/16"	12	36	23	58	350	5076
	F45ORFS1215	-12	3/4"	19	1.7/16"	12	41	27	62.5	350	5076
*	F45ORFS1614	-16	1"	25.4	1.3/16"	12	36	43	96.5	280	4061
	F45ORFS1615	-16	1"	25.4	1.7/16"	12	41	26	81	280	4061
	F45ORFS2021	-20	1.1/4"	31.8	1.11/16"	12	50	34	93	210	3046
	F45ORFS2432	-24	1.1/2"	38.1	2"	12	60	45	112	185	2683

FLANGE CODE 61 - 3000 PSI

FLANGIA 3000 PSI

BRIDE DROIT 3000 PSI (PIÈCE ENTIER)

FLANSCHANSCHLUSS 3000 PSI – EINTEILIG


BRIDA RECTA 3000 PSI (PIEZA UNICA)

* komatsu flange / Flangia Komatsu/ Bride komatsu /

Flange komatsu / Brida komatsu

Do Not Include O-Ring / O-Ring Non Compreso /

Sans O-Ring / Ohne O-Ring/ Sin O-Ring

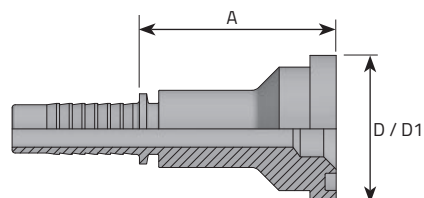


	Code	Tube			Thread	Dimensions			Pressure	
		D.N.	Hose	Diam		D	D1	A	Bar	Psi
		Inch		mm		Inch	mm	mm		
	FDL0808I	-8	1/2"	12.8		1/2"	30.2	49	350	5076
*	FDL0810I	-8	1/2"	12.8		5/8"	34	48	350	5076
	FDL0812I	-8	1/2"	12.8		3/4"	38.1	52	350	5076
	FDL1008I	-10	5/8"	16		1/2"	30.2	49	350	5076
*	FDL1010I	-10	5/8"	16		5/8"	34	49	350	5076
	FDL1012I	-10	5/8"	16		3/4"	38.1	48	350	5076
	FDL1208I	-12	3/4"	19		1/2"	30.2	47	350	5076
	FDL1212I	-12	3/4"	19		3/4"	38.1	47	350	5076
	FDL1216I	-12	3/4"	19		1"	44.5	50	350	5076
	FDL1612I	-16	1"	25.4		3/4"	38.1	50	280	4061
	FDL1616I	-16	1"	25.4		1"	44.5	50	280	4061
	FDL1620I	-16	1"	25.4		1.1/4"	50.8	67	280	4061
	FDL2016I	-20	1.1/4"	31.8		1"	44.5	57	210	3046
	FDL2020I	-20	1.1/4"	31.8		1.1/4"	50.8	65	210	3046
	FDL2024I	-20	1.1/4"	31.8		1.1/2"	60.3	70	210	3046
	FDL2424I	-24	1.1/2"	38.1		1.1/2"	60.3	70	185	2683
	FDL2432I	-24	1.1/2"	38.1		2"	71.4	72	185	2683
	FDL3232I	-32	2"	50.8		2"	71.4	73	170	2466

FLANGE CODE 61 - 3000 PSI - 90° ELBOW

FLANGIA 90° SAE J518 3000 PSI INTERA
 BRIDE 90° 3000 PSI (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS 3000 PSI – EINTEILIG
 BRIDA A 90° 3000 PSI (PIEZA UNICA)

* komatsu flange / Flangia Komatsu/ Bride komatsu /
 Flange komatsu / Brida komatsu

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

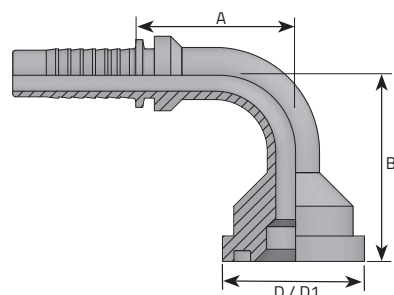


	Code	Tube			Thread	Dimensions				Pressure	
		D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch		mm		Inch	mm	mm	mm		
	F90L0808I	-8	1/2"	12.8		1/2"	30.2	43	39	350	5076
*	F90L0810I	-8	1/2"	12.8		5/8"	34	47	39	350	5076
	F90L0812I	-8	1/2"	12.8		3/4"	38.1	50	39	350	5076
	F90L1008I	-10	5/8"	16		1/2"	30.2	49	49	350	5076
*	F90L1010I	-10	5/8"	16		5/8"	34	52	49	350	5076
	F90L1012I	-10	5/8"	16		3/4"	38.1	55	49	350	5076
	F90L1208I	-12	3/4"	19		1/2"	30.2	52	57	350	5076
	F90L1212I	-12	3/4"	19		3/4"	38.1	58	57	350	5076
	F90L1216I	-12	3/4"	19		1"	44.5	62	57	350	5076
	F90L1612I	-16	1"	25.4		3/4"	38.1	60	77	280	4061
	F90L1616I	-16	1"	25.4		1"	44.5	64	77	280	4061
	F90L1620I	-16	1"	25.4		1.1/4"	50.8	70	77	280	4061
	F90L2016I	-20	1.1/4"	31.8		1"	44.5	82	89	210	3046
	F90L2020I	-20	1.1/4"	31.8		1.1/4"	50.8	87	89	210	3046
	F90L2024I	-20	1.1/4"	31.8		1.1/2"	60.3	88	89	210	3046
	F90L2424I	-24	1.1/2"	38.1		1.1/2"	60.3	102	101	185	2683
	F90L2432I	-24	1.1/2"	38.1		2"	71.4	118	101	185	2683
	F90L3232I	-32	2"	50.8		2"	71.4	120	144	170	2466

FLANGE CODE 61 - 3000 PSI - 90° ELBOW (LONG DROP)

FLANGIA A 90° INTERA SAE 3000 LONG DROP
BRIDE 90° 3000 PSI (PIÈCE ENTIER)
90° FLANSCHANSCHLUSS 3000 PSI – EINTEILIG
BRIDA A 90° 3000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
Sans O-Ring / Ohne O-Ring/ Sin O-Ring




Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
	Inch		mm		Inch	mm	mm	mm		
F90L1212ILD	-12	3/4"	19		3/4"	38.1	96.8	57	350	5076
F90L1216ILD	-16	3/4"	25.4		1"	44.5	134.5	57	350	5076
F90L1616ILD	-16	1"	25.4		1"	44.5	115.5	77	280	4061
F90L2020ILD	-20	1.1/4"	31.8		1.1/4"	50.8	114.2	89	210	3046
F90L2424ILD	-24	1.1/2"	38.1		1.1/2"	60.3	131.4	101	185	2683

FLANGE CODE 61 - 3000 PSI - 60° ELBOW

FLANGIA 60° SAE J518 3000 PSI INTERA
 BRIDE 60° 3000 PSI (PIÈCE ENTIER)
 60° FLANSCHANSCHLUSS 3000 PSI – EINTEILIG
 BRIDA A 60° 3000 PSI (PIEZA UNICA)


* komatsu flange / Flangia Komatsu/ Bride komatsu /
 Flange komatsu / Brida komatsu
 Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

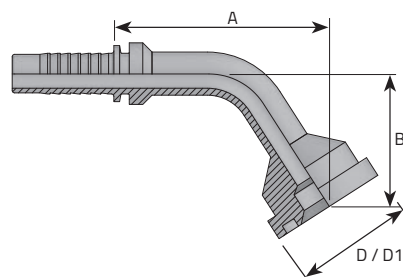

Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
	Inch	mm	mm		Inch	mm	mm	mm		
F60L0808I	-8	1/2"	12.8		1/2"	30.2	-	63	350	5076
* F60L0810I	-8	1/2"	12.8		5/8"	34	-	68	350	5076
F60L0812I	-8	1/2"	12.8		3/4"	38.1	-	68	350	5076
F60L1008I	-10	5/8"	16		1/2"	30.2	-	59	350	5076
* F60L1010I	-10	5/8"	16		5/8"	34	-	63	350	5076
F60L1012I	-10	5/8"	16		3/4"	38.1	-	63	350	5076
F60L1208I	-12	3/4"	19		1/2"	30.2	-	63	350	5076
F60L1212I	-12	3/4"	19		3/4"	38.1	-	67	350	5076
F60L1216I	-16	3/4"	25.4		1"	44.5	-	70	350	5076
F60L1612I	-16	1"	25.4		3/4"	38.1	-	83	280	4061
F60L1616I	-16	1"	25.4		1"	44.5	-	86	280	4061
F60L1620I	-16	1"	25.4		1.1/4"	50.8	-	90	280	4061
F60L2016I	-20	1.1/4"	31.8		1"	44.5	-	96	210	3046
F60L2020I	-20	1.1/4"	31.8		1.1/4"	50.8	-	100	210	3046
F60L2024I	-20	1.1/4"	31.8		1.1/2"	60.3	-	101	210	3046
F60L2424I	-24	1.1/2"	38.1		1.1/2"	60.3	-	112	185	2683
F60L2432I	-24	1.1/2"	38.1		2"	71.4	-	123	185	2683
F60L3232I	-32	2"	50.8		2"	71.4	-	148	170	2466

FLANGE CODE 61 - 3000 PSI - 45° ELBOW

FLANGIA 45° SAE J518 3000 PSI INTERA
 BRIDE 45° 3000 PSI (PIÈCE ENTIER)
 45° FLANSCHANSCHLUSS 3000 PSI – EINTEILIG
 BRIDA A 45° 3000 PSI (PIEZA UNICA)

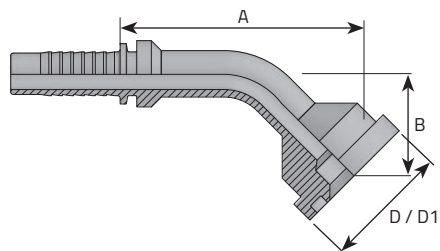


* komatsu flange / Flangia Komatsu/ Bride komatsu /
 Flange komatsu / Brida komatsu
 Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

	Code	Tube			Thread	Dimensions				Pressure	
		D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch		mm		Inch	mm	mm	mm		
	F45L0808I	-8	1/2"	12.8		1/2"	30.2	23	63	350	5076
*	F45L0810I	-8	1/2"	12.8		5/8"	34	25	68	350	5076
	F45L0812I	-8	1/2"	12.8		3/4"	38.1	28	68	350	5076
	F45L1008I	-10	5/8"	16		1/2"	30.2	26	59	350	5076
*	F45L1010I	-10	5/8"	16		5/8"	34	30	63	350	5076
	F45L1012I	-10	5/8"	16		3/4"	38.1	30	63	350	5076
	F45L1208I	-12	3/4"	19		1/2"	30.2	28	63	350	5076
	F45L1212I	-12	3/4"	19		3/4"	38.1	32	67	350	5076
	F45L1216I	-16	3/4"	25.4		1"	44.5	35	70	350	5076
	F45L1612I	-16	1"	25.4		3/4"	38.1	35x	83	280	4061
	F45L1616I	-16	1"	25.4		1"	44.5	32	86	280	4061
	F45L1620I	-16	1"	25.4		1.1/4"	50.8	36	90	280	4061
	F45L2016I	-20	1.1/4"	31.8		1"	44.5	36	96	210	3046
	F45L2020I	-20	1.1/4"	31.8		1.1/4"	50.8	43	100	210	3046
	F45L2024I	-20	1.1/4"	31.8		1.1/2"	60.3	44	101	210	3046
	F45L2424I	-24	1.1/2"	38.1		1.1/2"	60.3	41	112	185	2683
	F45L2432I	-24	1.1/2"	38.1		2"	71.4	52	123	185	2683
	F45L3232I	-32	2"	50.8		2"	71.4	59	148	170	2466

FLANGE CODE 61 - 3000 PSI - 30° ELBOW

FLANGIA 30° SAE J518 3000 PSI INTERA
 BRIDE 30° 3000 PSI (PIÈCE ENTIER)
 30° FLANSCHANSCHLUSS 3000 PSI – EINTEILIG
 BRIDA 30° A 3000 PSI (PIEZA UNICA)


* komatsu flange / Flangia Komatsu/ Bride komatsu /
 Flange komatsu / Brida komatsu
 Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

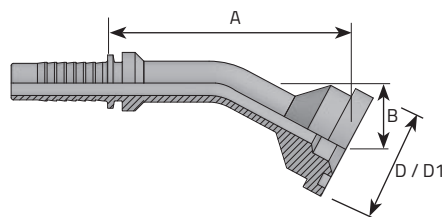

	Code	Tube			Thread	Dimensions				Pressure	
		D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch		mm		Inch	mm	mm	mm		
	F30L0808I	-8	1/2"	12.8		1/2"	30.2	-	63	350	5076
*	F30L0810I	-8	1/2"	12.8		5/8"	34	-	68	350	5076
	F30L0812I	-8	1/2"	12.8		3/4"	38.1	-	68	350	5076
	F30L1008I	-10	5/8"	16		1/2"	30.2	-	59	350	5076
*	F30L1010I	-10	5/8"	16		5/8"	34	-	63	350	5076
	F30L1012I	-10	5/8"	16		3/4"	38.1	-	63	350	5076
	F30L1208I	-12	3/4"	19		1/2"	30.2	-	63	350	5076
	F30L1212I	-12	3/4"	19		3/4"	38.1	-	67	350	5076
	F30L1216I	-16	3/4"	25.4		1"	44.5	-	70	350	5076
	F30L1612I	-16	1"	25.4		3/4"	38.1	-	83	280	4061
	F30L1616I	-16	1"	25.4		1"	44.5	-	86	280	4061
	F30L1620I	-16	1"	25.4		1.1/4"	50.8	-	90	280	4061
	F30L2016I	-20	1.1/4"	31.8		1"	44.5	-	96	210	3046
	F30L2020I	-20	1.1/4"	31.8		1.1/4"	50.8	-	100	210	3046
	F30L2024I	-20	1.1/4"	31.8		1.1/2"	60.3	-	101	210	3046
	F30L2424I	-24	1.1/2"	38.1		1.1/2"	60.3	-	112	185	2683
	F30L2432I	-24	1.1/2"	38.1		2"	71.4	-	123	185	2683
	F30L3232I	-32	2"	50.8		2"	71.4	-	148	170	2466

FLANGE CODE 61- 3000 PSI - 22.5° ELBOW

FLANGIA 22.5° SAE J518 3000 PSI INTERA
 BRIDE 22.5° 3000 PSI (PIÈCE ENTIER)
 22.5° FLANSCHANSCHLUSS 3000 PSI – EINTEILIG
 BRIDA A 22.5° 3000 PSI (PIEZA UNICA)

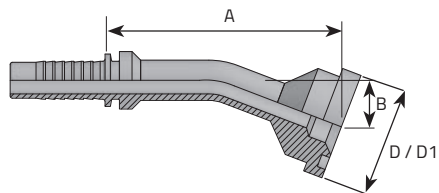

* komatsu flange / Flangia Komatsu/ Bride komatsu /
 Flange komatsu / Brida komatsu
 Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

	Code	Tube			Thread	Dimensions				Pressure	
		D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch		mm		Inch	mm	mm	mm		
	F22.5L0808I	-8	1/2"	12.8		1/2"	30.2	-	63	350	5076
*	F22.5L0810I	-8	1/2"	12.8		5/8"	34	-	68	350	5076
	F22.5L0812I	-8	1/2"	12.8		3/4"	38.1	-	68	350	5076
	F22.5L1008I	-10	5/8"	16		1/2"	30.2	-	59	350	5076
*	F22.5L1010I	-10	5/8"	16		5/8"	34	-	63	350	5076
	F22.5L1012I	-10	5/8"	16		3/4"	38.1	-	63	350	5076
	F22.5L1208I	-12	3/4"	19		1/2"	30.2	-	63	350	5076
	F22.5L1212I	-12	3/4"	19		3/4"	38.1	-	67	350	5076
	F22.5L1216I	-16	3/4"	25.4		1"	44.5	-	70	350	5076
	F22.5L1612I	-16	1"	25.4		3/4"	38.1	-	83	280	4061
	F22.5L1616I	-16	1"	25.4		1"	44.5	-	86	280	4061
	F22.5L1620I	-16	1"	25.4		1.1/4"	50.8	-	90	280	4061
	F22.5L2016I	-20	1.1/4"	31.8		1"	44.5	-	96	210	3046
	F22.5L2020I	-20	1.1/4"	31.8		1.1/4"	50.8	-	100	210	3046
	F22.5L2024I	-20	1.1/4"	31.8		1.1/2"	60.3	-	101	210	3046
	F22.5L2424I	-24	1.1/2"	38.1		1.1/2"	60.3	-	112	185	2683
	F22.5L2432I	-24	1.1/2"	38.1		2"	71.4	-	123	185	2683
	F22.5L3232I	-32	2"	50.8		2"	71.4	-	148	170	2466

FLANGE CODE 62 - 6000 PSI


FLANGIA DIRITTA SAE J518 6000 PSI INTERA

BRIDE DROIT 6000 PSI (PIÈCE ENTIER)

FLANSCHANSCHLUSS 6000 PSI – EINTEILIG

BRIDA RECTA 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
Sans O-Ring / Ohne O-Ring/ Sin O-Ring

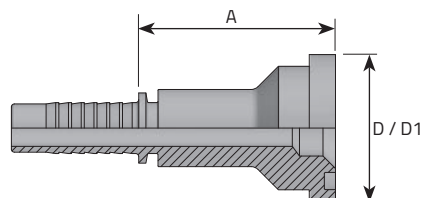


Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	D1	A	Bar	Psi
	Inch	mm	mm		Inch	mm	mm		
FDP0808I	-8	1/2"	12.8		1/2"	31.7	50	415	6019
FDP0812I	-8	1/2"	12.8		3/4"	41.3	55	415	6019
FDP1008I	-10	5/8"	16		1/2"	31.7	50	350	5076
FDP1012I	-10	5/8"	16		3/4"	41.3	51	350	5076
FDP1208I	-12	3/4"	19		1/2"	31.7	53	350	5076
FDP1212I	-12	3/4"	19		3/4"	41.3	53	350	5076
FDP1216I	-12	3/4"	19		1"	47.6	64	350	5076
FDP1612I	-16	1"	25.4		3/4"	41.3	64	280	4061
FDP1616I	-16	1"	25.4		1"	47.6	66	280	4061
FDP1620I	-16	1"	25.4		1.1/4"	54	71	280	4061
FDP2016I	-20	1.1/4"	31.8		1"	47.6	66	210	3046
FDP2020I	-20	1.1/4"	31.8		1.1/4"	54	67	210	3046
FDP2024I	-20	1.1/4"	31.8		1.1/2"	63.5	78	210	3046
FDP2424I	-24	1.1/2"	38.1		1.1/2"	63.5	78	185	2683
FDP2432I	-24	1.1/2"	38.1		2"	79.4	73	185	2683
FDP3232I	-32	2"	50.8		2"	79.4	73	172	2495

FLANGE CODE 62 - 6000 PSI - 90° ELBOW

FLANGIA A 90° SAE J518 6000 PSI INTERA
 BRIDE 90° 6000 PSI (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS 6000 PSI – EINTEILIG
 BRIDA A 90° 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

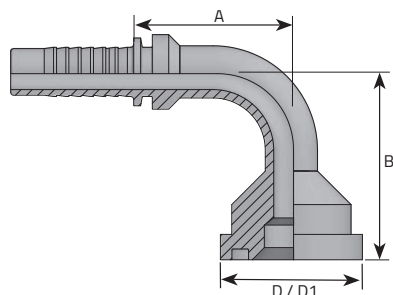


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
	Inch		mm		Inch	mm	mm	mm		
F90P0808I	-8	1/2"	12.8		1/2"	31.7	44	39	415	6019
F90P0812I	-8	1/2"	12.8		3/4"	41.3	51	39	415	6019
F90P1008I	-10	5/8"	16		1/2"	31.7	50	49	350	5076
F90P1012I	-10	5/8"	16		3/4"	41.3	59	49	350	5076
F90P1208I	-12	3/4"	19		1/2"	31.7	53	57	350	5076
F90P1212I	-12	3/4"	19		3/4"	41.3	62	57	350	5076
F90P1216I	-12	3/4"	19		1"	47.6	67	57	350	5076
F90P1612I	-16	1"	25.4		3/4"	41.3	64	77	280	4061
F90P1616I	-16	1"	25.4		1"	47.6	69	77	280	4061
F90P1620I	-16	1"	25.4		1.1/4"	54	73	77	280	4061
F90P2016I	-20	1.1/4"	31.8		1"	47.6	87	89	210	3046
F90P2020I	-20	1.1/4"	31.8		1.1/4"	54	93	89	210	3046
F90P2024I	-20	1.1/4"	31.8		1.1/2"	63.5	97	89	210	3046
F90P2424I	-24	1.1/2"	38.1		1.1/2"	63.5	111	101	185	2683
F90P2432I	-24	1.1/2"	38.1		2"	79.4	126	101	185	2683
F90P3232I	-32	2"	50.8		2"	79.4	128	144	172	2495

FLANGE CODE 62 6000 PSI - 90° ELBOW (LONG DROP)

FLANGIA A 90° INTERA SAE 6000 LONG DROP
 BRIDE 90° 6000 PSI (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS 6000 PSI – EINTEILIG
 BRIDA A 90° 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring




Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch	mm		Inch	mm	mm	mm		
F90P1212I LD	20	3/4"	12		3/4"	41.3	100	57	350	5076
F90P1216I LD	20	3/4"	12		1"	47.6	137	57	350	5076
F90P1616I LD	25	1"	16		1"	47.6	120	77	280	4061
F90P2020I LD	32	1.1/4"	20		1.1/4"	54	115	89	210	3046
F90P2424I LD	40	1.1/2"	24		1.1/2"	63.5	135	95	185	2683

FLANGE CODE 62 6000 PSI - 60° ELBOW

FLANGIA A 60° SAE J518 6000 PSI INTERA
 BRIDE 60° 6000 PSI (PIÈCE ENTIER)
 60° FLANSCHANSCHLUSS 6000 PSI – EINTEILIG
 BRIDA A60° 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

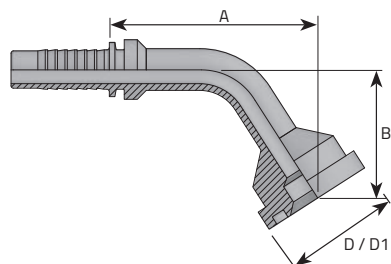


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
	Inch		mm		Inch	mm	mm	mm		
F60P0808I	-8	1/2"	12.8		1/2"	31.7	-	64	415	6019
F60P0812I	-8	1/2"	12.8		3/4"	41.3	-	69	415	6019
F60P1008I	-10	5/8"	16		1/2"	31.7	-	60	350	5076
F60P1012I	-10	5/8"	16		3/4"	41.3	-	66	350	5076
F60P1208I	-12	3/4"	19		1/2"	31.7	-	64	350	5076
F60P1212I	-12	3/4"	19		3/4"	41.3	-	70	350	5076
F60P1216I	-12	3/4"	19		1"	47.6	-	74	350	5076
F60P1612I	-16	1"	25.4		3/4"	41.3	-	86	280	4061
F60P1616I	-16	1"	25.4		1"	47.6	-	89	280	4061
F60P1620I	-16	1"	25.4		1.1/4"	54	-	94	280	4061
F60P2016I	-20	1.1/4"	31.8		1"	47.6	-	100	210	3046
F60P2020I	-20	1.1/4"	31.8		1.1/4"	54	-	104	210	3046
F60P2024I	-20	1.1/4"	31.8		1.1/2"	63.5	-	107	210	3046
F60P2424I	-24	1.1/2"	38.1		1.1/2"	63.5	-	118	185	2683
F60P2432I	-24	1.1/2"	38.1		2"	79.4	-	119	185	2683
F60P3232I	-32	2"	50.8		2"	79.4	-	153	172	2495

FLANGE CODE 62 - 6000 PSI - 45° ELBOW

FLANGIA A 45° SAE J518 6000 PSI INTERA
 BRIDE 45° 6000 PSI (PIÈCE ENTIER)
 45° FLANSCHANSCHLUSS 6000 PSI – EINTEILIG
 BRIDA A 45° 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

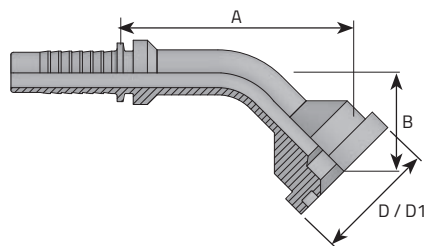


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
	Inch	mm	mm		Inch	mm	mm	mm		
F45P0808I	-8	1/2"	12.8		1/2"	31.7	23	64	415	6019
F45P0812I	-8	1/2"	12.8		3/4"	41.3	28	69	415	6019
F45P1008I	-10	5/8"	16		1/2"	31.7	26	60	350	5076
F45P1012I	-10	5/8"	16		3/4"	41.3	30	66	350	5076
F45P1208I	-12	3/4"	19		1/2"	31.7	28	64	350	5076
F45P1212I	-12	3/4"	19		3/4"	41.3	32	70	350	5076
F45P1216I	-12	3/4"	19		1"	47.6	35	74	350	5076
F45P1612I	-16	1"	25.4		3/4"	41.3	35	86	280	4061
F45P1616I	-16	1"	25.4		1"	47.6	32	89	280	4061
F45P1620I	-16	1"	25.4		1.1/4"	54	36	94	280	4061
F45P2016I	-20	1.1/4"	31.8		1"	47.6	36	100	210	3046
F45P2020I	-20	1.1/4"	31.8		1.1/4"	54	43	104	210	3046
F45P2024I	-20	1.1/4"	31.8		1.1/2"	63.5	44	107	210	3046
F45P2424I	-24	1.1/2"	38.1		1.1/2"	63.5	41	118	185	2683
F45P2432I	-24	1.1/2"	38.1		2"	79.4	52	119	185	2683
F45P3232I	-32	2"	50.8		2"	79.4	59	153	172	2495

FLANGE CODE 62 - 6000 PSI - 30° ELBOW

FLANGIA A 30° SAE J518 6000 PSI INTERA
 BRIDE 30° 6000 PSI (PIÈCE ENTIER)
 30° FLANSCHANSCHLUSS 6000 PSI – EINTEILIG
 BRIDA A 30° 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

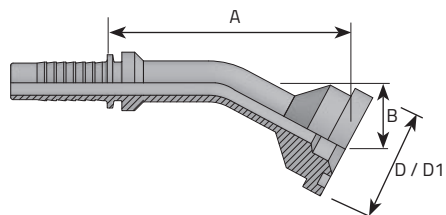


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
	Inch	mm	mm		Inch	mm	mm	mm		
F30P0808I	-8	1/2"	12.8		1/2"	31.7	-	64	415	6019
F30P0812I	-8	1/2"	12.8		3/4"	41.3	-	69	415	6019
F30P1008I	-10	5/8"	16		1/2"	31.7	-	60	350	5076
F30P1012I	-10	5/8"	16		3/4"	41.3	-	66	350	5076
F30P1208I	-12	3/4"	19		1/2"	31.7	-	64	350	5076
F30P1212I	-12	3/4"	19		3/4"	41.3	-	70	350	5076
F30P1216I	-12	3/4"	19		1"	47.6	-	74	350	5076
F30P1612I	-16	1"	25.4		3/4"	41.3	-	86	280	4061
F30P1616I	-16	1"	25.4		1"	47.6	-	89	280	4061
F30P1620I	-16	1"	25.4		1.1/4"	54	-	94	280	4061
F30P2016I	-20	1.1/4"	31.8		1"	47.6	-	100	210	3046
F30P2020I	-20	1.1/4"	31.8		1.1/4"	54	-	104	210	3046
F30P2024I	-20	1.1/4"	31.8		1.1/2"	63.5	-	107	210	3046
F30P2424I	-24	1.1/2"	38.1		1.1/2"	63.5	-	118	185	2683
F30P2432I	-24	1.1/2"	38.1		2"	79.4	-	119	185	2683
F30P3232I	-32	2"	50.8		2"	79.4	-	153	172	2495

FLANGE CODE 62 - 6000 PSI - 22.5° ELBOW

FLANGIA A 22.5° SAE J518 6000 PSI INTERA
 BRIDE 22.5° 6000 PSI (PIÈCE ENTIER)
 22.5° FLANSCHANSCHLUSS 6000 PSI – EINTEILIG
 BRIDA A 22.5° 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

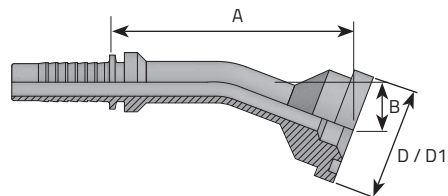


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
	Inch	mm	mm		Inch	mm	mm	mm		
F22.5P0808I	-8	1/2"	12.8		1/2"	31.7	-	64	415	6019
F22.5P0812I	-8	1/2"	12.8		3/4"	41.3	-	69	415	6019
F22.5P1008I	-10	5/8"	16		1/2"	31.7	-	60	350	5076
F22.5P1012I	-10	5/8"	16		3/4"	41.3	-	66	350	5076
F22.5P1208I	-12	3/4"	19		1/2"	31.7	-	64	350	5076
F22.5P1212I	-12	3/4"	19		3/4"	41.3	-	70	350	5076
F22.5P1216I	-12	3/4"	19		1"	47.6	-	74	350	5076
F22.5P1612I	-16	1"	25.4		3/4"	41.3	-	86	280	4061
F22.5P1616I	-16	1"	25.4		1"	47.6	-	89	280	4061
F22.5P1620I	-16	1"	25.4		1.1/4"	54	-	94	280	4061
F22.5P2016I	-20	1.1/4"	31.8		1"	47.6	-	100	210	3046
F22.5P2020I	-20	1.1/4"	31.8		1.1/4"	54	-	104	210	3046
F22.5P2024I	-20	1.1/4"	31.8		1.1/2"	63.5	-	107	210	3046
F22.5P2424I	-24	1.1/2"	38.1		1.1/2"	63.5	-	118	185	2683
F22.5P2432I	-24	1.1/2"	38.1		2"	79.4	-	119	185	2683
F22.5P3232I	-32	2"	50.8		2"	79.4	-	153	172	2495

SUPERCAT FLANGE

FLANGIA DIRITTA SUPERCAT INTERA
 EMBOUT À BRIDE SUPERCAT DROITE (PIÈCE ENTIER)
 FLANSCHANSCHLUSS SUPERCAT EINTEILIG
 BRIDA RECTA SUPERCAT (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

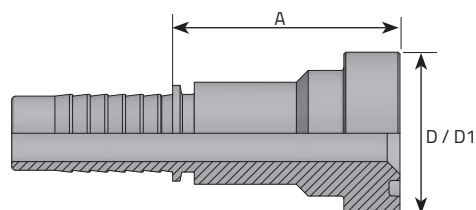


Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	D1	A	Bar	Psi
		Inch	mm		Inch	mm	mm		
FDS1212I	-12	3/4"	19		3/4"	41.3	58	350	5076
FDS1216I	-12	3/4"	19		1"	47.6	70	350	5076
FDS1616I	-16	1"	25.4		1"	47.6	72	280	4061
FDS1620I	-16	1"	25.4		1.1/4"	54	75	280	4061
FDS2020I	-20	1.1/4"	31.8		1.1/4"	54	71	210	3046
FDS2024I	-20	1.1/4"	31.8		1.1/2"	63.5	80	210	3046
FDS2424I	-24	1.1/2"	38.1		1.1/2"	63.5	80	185	2683

SUPERCAT FLANGE - 90° ELBOW

FLANGIA 90° SUPERCAT INTERA
 BRIDE 90° SUPERCAT (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS SUPERCAT EINTEILIG
 BRIDA 90° SUPERCAT (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

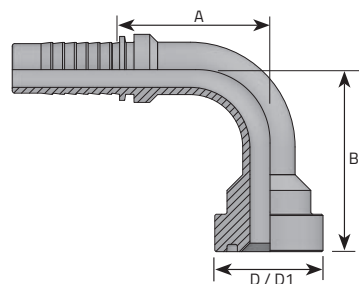


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
	Inch	mm	mm		Inch	mm	mm	mm		
F90S1212I	-12	3/4"	19		3/4"	41.3	67	57	350	5076
F90S1216I	-12	3/4"	19		1"	47.6	73	57	350	5076
F90S1616I	-16	1"	25.4		1"	47.6	75	77	280	4061
F90S1620I	-16	1"	25.4		1.1/4"	54	80	77	280	4061
F90S2020I	-20	1.1/4"	31.8		1.1/4"	54	97	89	210	3046
F90S2024I	-20	1.1/4"	31.8		1.1/2"	63.5	99	89	210	3046
F90S2424I	-24	1.1/2"	38.1		1.1/2"	63.5	113	101	185	2683

SUPERCAT FLANGE 90° ELBOW (LONG DROP)

FLANGIA 90° SUPERCAT INTERA LONG DROP
 BRIDE 90° SUPERCAT (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS SUPERCAT EINTEILIG
 BRIDA 90° SUPERCAT (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring




Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch	mm		Inch	mm	mm	mm		
F90S1212ILD	-12	3/4"	19		3/4"	41.3	105.4	57	350	5076
F90S1216ILD	-12	3/4"	19		1"	47.6	142	57	350	5076
F90S1616ILD	-16	1"	25.4		1"	47.6	124.8	77	280	4061
F90S2020ILD	-20	1.1/4"	31.8		1.1/4"	54	123	89	210	3046
F90S2424ILD	-24	1.1/2"	38.1		1.1/2"	63.5	139	101	185	2683

SUPERCAT FLANGE - 45° ELBOW

FLANGIA 45° SUPERCAT INTERA
 BRIDE 45° SUPERCAT (PIÈCE ENTIER)
 45° FLANSCHANSCHLUSS SUPERCAT EINTEILIG
 BRIDA 45° SUPERCAT (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

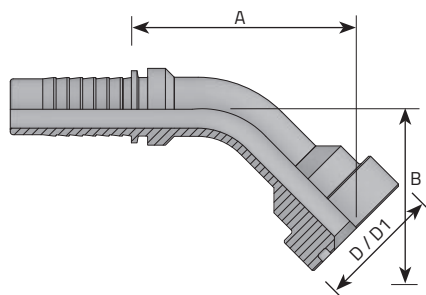


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch	mm		Inch	mm	mm	mm		
F45S1212I	-12	3/4"	19		3/4"	41.3	39	74	350	5076
F45S1216I	-12	3/4"	19		1"	47.6	43	78	350	5076
F45S1616I	-16	1"	25.4		1"	47.6	40	94	280	4061
F45S1620I	-16	1"	25.4		1.1/4"	54	43	97	280	4061
F45S2020I	-20	1.1/4"	31.8		1.1/4"	54	50	107	210	3046
F45S2024I	-20	1.1/4"	31.8		1.1/2"	63.5	51	108	210	3046
F45S2424I	-24	1.1/2"	38.1		1.1/2"	63.5	49	120	185	2683

WATERJET CLEANER FEMALE - FK TYPE

FEMMINA PER IDROPULTRICI TIPO "FK"
FEMELLE SÉRIE "FK"
DKR FÜR HOCHDRUCKREINIGER – "FK" SERIE
HEMBRA PARA HIDROLAVADORA – SERIE "FK"

* Hobby applications
Uso Hobbistico

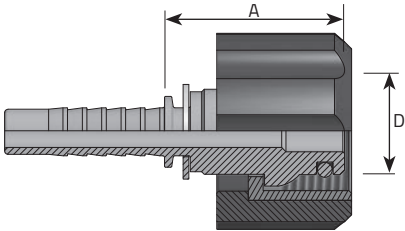

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	D	A		Bar	Psi
		Inch	mm	mm		mm	mm			
FDW0422T14	-4	1/4"	6.4	M22 x1.5		14	33		400	5801
FDW0422T15	-4	1/4"	6.4	M22 x1.5		15	33		400	5801
* FDW0422T15L	-4	1/4"	6.4	M22 x1.5		15	40		400	5801
FDW0522T14	-5	5/16"	7.9	M22 x1.5		14	33		400	5801
FDW0522T15	-5	5/16"	7.9	M22 x1.5		15	33		400	5801
* FDW0522T15L	-5	5/16"	7.9	M22 x1.5		15	40		400	5801
FDW0622T14	-6	3/8"	9.5	M22 x1.5		14	33		400	5801
FDW0622T15	-6	3/8"	9.5	M22 x1.5		15	33		400	5801


WATERJET CLEANER FEMALE 90° ELBOW- FK TYPE

FEMMINA 90° PER IDROPULTRICI TIPO "FK"

FEMELLE 90° SÉRIE "FK"

DK 90° FÜR HOCHDRUCKREINIGER – "FK" SERIE


HEMBRA 90° PARA HIDROLAVADORA – SERIE "FK"



	Code	Tube		Thread		Dimensions			Pressure		
		D.N.	Hose	Diam	T	t/1"	D	A	B		
		Inch	mm	mm		mm	mm	mm		Bar	Psi
	F90W0422T14	-4	1/4"	6.4	M22 x1.5		14	27.5	44.5	400	5801
	F90W0522T14	-5	5/16"	7.9	M22 x1.5		14	32	44.5	400	5801
	F90W0622T14	-6	3/8"	9.5	M22 x1.5		14	35	47	400	5801

PISTOL WASH CLEANER JUNCTION


ATTACCO PER PISTOLE IDROPULITRICI
JUNCTION POUR WASHCLEANER
VERBINDUNG FÜR HOCHDRUCKREINIGER
UNIÓN PARA HIDROLAVADORA



Code	Tube			Thread	Dimensions		Pressure	
	D.N.	Hose	Diam		D	A	Bar	Psi
		Inch	mm		mm	mm		
FW04D10	-4	1/4"	6.4		10	33.5		
FW04D11	-4	1/4"	6.4		11	33.5		
FW05D10	-5	5/16"	7.9		10	33.5		
FW05D11	-5	5/16"	7.9		11	33.5		

STAPLE-LOCK MALE


MASCHIO MINIERA
MÂLE STAPLE-LOCK (MINE)
STECK-O PRESSNIPPEL
MACHO FIJO PARA MINERÍA

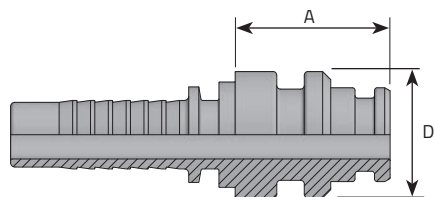

Code	Tube			Thread	Dimensions		Pressure	
	D.N.	Hose	Diam		A	D	Bar	Psi
		Inch	mm		mm	mm		
MINE0404	-4	1/4"	6.4		28.7	15		
MINE0606	-6	3/8"	9.5		28.8	20		
MINE0808	-8	1/2"	12.8		28.7	24		
MINE1212	-12	3/4"	19		28.9	29		
MINE1616	-16	1"	25.4		35.1	39		
MINE2020	-20	1.1/4"	31.8		35	46		
MINE2424	-24	1.1/2"	38.1		40	55		
MINE3232	-32	2"	50.8		40	64		

STAPLE-LOCK MALE 90° ELBOW


MASCHIO 90° MINIERA
MÂLE 90° STAPLE-LOCK (MINE)
90° STECK-O PRESSNIPPEL
MACHO 90° PARA MINERÍA



Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		A	B	D	Bar	Psi
	Inch	mm	mm		mm	mm	mm		
MINE900606	-6	3/8"	9.5		32.5	53.5	20		
MINE900808	-8	1/2"	12.8		39	58	24		

STAPLE-LOCK MALE 45° ELBOW


MASCHIO 45° MINIERA
 MÂLE 45° STAPLE-LOCK (MINE)
 45° STECK-O PRESSNIPPEL
 MACHO 45° PARA MINERÍA

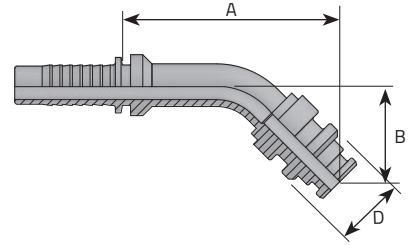

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		A	B	D	Bar	Psi
		Inch	mm		mm	mm	mm		
MINE450606	-6	3/8"	9.5		65	34	20		
MINE450808	-8	1/2"	12.8		73	35	24		

DOUBLE CONNECTOR


GIUNZIONE TUBO DIRITTA
JONCTION TUYAUX DROIT
VERBINDUNGSNIPPEL
CONECTOR DOBLE



Code	Tube			Thread	Dimensions		Pressure	
	D.N.	Hose	Diam		A		Bar	Psi
	Inch		mm		mm			
GD04	-4	1/4"	6.4		14		450	6526
GD05	-5	5/16"	7.9		14		350	5076
GD06	-6	3/8"	9.5		15		445	6454
GD08	-8	1/2"	12.8		20		415	6019
GD10	-10	5/8"	16		16		350	5076
GD12	-12	3/4"	19		18		350	5076
GD16	-16	1"	25.4		20		280	4061
GD20	-20	1.1/4"	31.8		21		210	3046

BRAZING TAIL


CODOLO A SALDARE
QUEUE À SOUDER
SCHWEISSNIPPEL
ESPIGA SOLDABLE

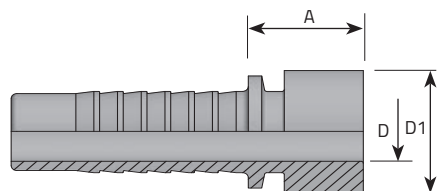

	Code	Tube			Thread	Dimensions			Pressure	
		D.N.	Hose	Diam		D	D1	A	Bar	Psi
			Inch	mm		mm	mm	mm		
	CS03	-3	3/16"	4.8		-	12	14.5		
	CS04	-4	1/4"	6.4		-	12	12.5		
	CS04T8	-4	1/4"	6.4		8	12	12.5		
	CS05	-5	5/16"	7.9		-	14	13.5		
	CS05T10	-5	5/16"	7.9		10	15	13.6		
	CS06	-6	3/8"	9.5		-	16	14.5		
	CS06T10	-6	3/8"	9.5		10	16	14.5		
	CS06T12	-6	3/8"	9.5		12	16	14.5		
	CS08	-8	1/2"	12.8		-	20	16		
	CS08T14	-8	1/2"	12.8		14	20	16		
	CS08T15	-8	1/2"	12.8		15	20	16		
	CS08T16	-8	1/2"	12.8		16	20	16		
	CS10	-10	5/8"	16		-	24	18		
	CS12	-12	3/4"	19		-	26	15.5		
	CS16	-16	1"	25.4		-	32	22		
	CS20	-20	1.1/4"	31.8		-	40	21.5		
	CS24	-24	1.1/2"	38.1		-	46	21.5		
	CS32	-32	2"	50.8		-	60	23		

WHITWORTH CO² FEMALE


FEMMINA CO₂ FILETTO WHITWORTH
FEMÂLE CO₂ WHITWORTH
PRESSARMATUR CO₂ IG 21.7 WHITWORTH
HEMBRA CO₂ WHITWORTH

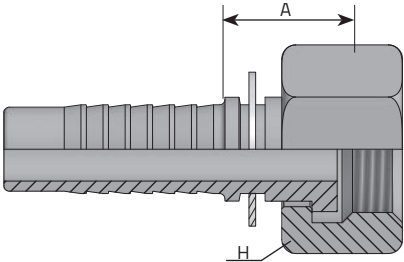

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	mm		mm	mm		
FW0621.7	-6	3/8"	9.5	21.7 W	14	27	16		
FW0821.7	-8	1/2"	12.8	21.7 W	14	27	16.5		

WHITWORTH CO² MALE

MASCHIO CO₂ FILETTO WHITWORTH
 MELLE CO₂ WHITWORTH
 PRESSARMATUR CO₂ AG 21.7 WHITWORTH
 MACHO CO₂ WHITWORTH

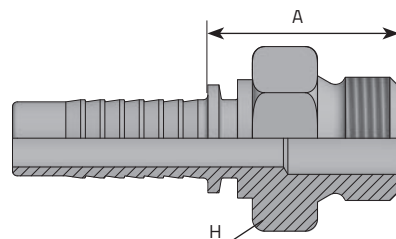

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	mm		mm	mm		
MW0621.7	-6	3/8"	9.5	21.7 W	14	24	27		
MW0821.7	-8	1/2"	12.8	21.7 W	14	24	27.5		

Interlock

INTERLOCK FERRULE FOR 4SH


BOCCOLA PER TUBO 4SH

JUPE POUR 4SH

PRESSHÜLSE 4SH

CASQUILLO PARA 4SH

Double skive - Doppia pelatura - Double dénudable -
Schweifassung - Doble pelatura



Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
KB4SH10	-10	5/8"	16		36	52	
KB4SH12	-12	3/4"	19		38	60	
KB4SH16	-16	1"	25.4		46	74.5	
KB4SH20	-20	1.1/4"	31.8		56	87.8	
KB4SH24	-24	1.1/2"	38.1		62	94.4	
KB4SH32	-32	2"	50.8		79.5	99	

INTERLOCK FERRULE FOR R13/R15


BOCCOLA PER TUBO R13/R15

JUPE POUR R13/R15

PRESSHÜLSE R13/R15

CASQUILLO PARA R13/R15


Double skive - Doppia pelatura - Double dénudable -
 Schaelfassung - Doble peladura



Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
KBH1320	-20	1.1/4"	31.8		60	87.8	
KBH1324	-24	1.1/2"	38.1		67	94.4	
KBH1332	-32	2"	50.8		84.5	99	

INTERLOCK BSPP MALE


MASCHIO BSPP SV 60°
 EMBOUT MÂLE BSPP CÔNE 60°
 AGR 60° INNENKONUS (BSPP-GEWINDE)
 MACHO BSPP CONO 60°

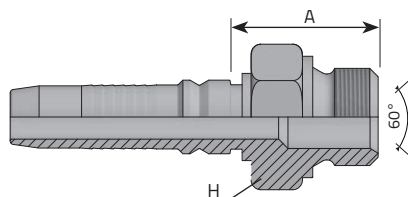

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
		Inch	mm	Inch		mm	mm			
KMG1212	-12	3/4"	19	3/4"	14	32	34.7		420	6091
KMG1616	-16	1"	25.4	1"	11	38	37.4		420	6091
KMG1620	-16	1"	25.4	1.1/4"	11	50	42.6		420	6091
KMG2020	-20	1.1/4"	31.8	1.1/4"	11	50	44.2		420	6091
KMG2424	-24	1.1/2"	38.1	1.1/2"	11	55	44.5		345	5004
KMG3232	-32	2"	50.8	2"	11	70	54		345	5004

INTERLOCK BSPT MALE


MASCHIO BSPT SV 60°
MÂLE BSPT CÔNE 60°
AGR KONISCH (BSPT)
MACHO BSPT CONO 60°

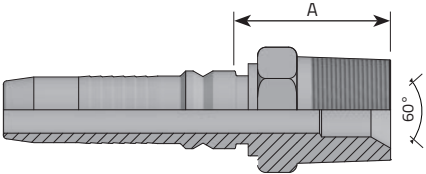

	Code	Tube			Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
			Inch	mm	Inch		mm	mm			
	KMGK1212	-12	3/4"	19	3/4"	14	27	34.7		420	6091
	KMGK1616	-16	1"	25.4	1"	11	36	43.5		420	6091
	KMGK2020	-20	1.1/4"	31.8	1.1/4"	11	46	42.0		414	6004
	KMGK2424	-24	1.1/2"	38.1	1.1/2"	11	50	46		345	5004
	KMGK3232	-32	2	50.8	2"	11	65	57		345	5004

INTERLOCK BSPP FEMALE (O-RING) - THURST-WIRE NUT


FEMMINA DIRITTA BSPP SV 60° DADO SPINATO CON O-RING
 FEMELLE DROIT AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKR MIT O-RING + GESTIFTETE ÜBERWURFMUTTER (BSPP-GEWINDE)
 HEMBRA RECTA BSPP CON O-RING CONO 60° (TUERCA CON SEGURO)

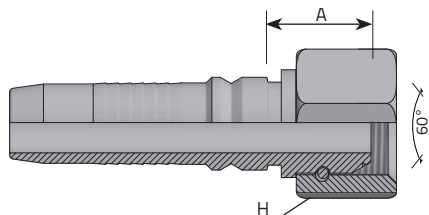

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	Inch		mm	mm		
KFDG1212	-12	3/4"	19	3/4"	14	32	22.7	420	6091
KFDG1616	-16	1"	25.4	1"	11	38	24.7	420	6091
KFDG1620	-16	1"	25.4	1.1/4"	11	50	27.5	414	6004
KFDG2020	-20	1.1/4"	31.8	1.1/4"	11	50	28.2	345	5004
KFDG2424	-24	1.1/2"	38.1	1.1/2"	11	55	30.5	345	5004
KFDG3232	-32	2"	50.8	2"	11	70	34	345	5004

INTERLOCK BSPP FEMALE 90° (O-RING) - THURST-WIRE NUT


FEMMINA 90° BSPP SV60° DADO SPINATO CON O-RING
 FEMELLE 90° AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKR 90° BOGEN MIT O-RING + GESTIFTETE ÜBERWURFMUTTER (BSPP-GEWINDE)
 HEMBRA BSPP A 90° CON O-RING CONO 60° (TUERCA CON SEGURO)

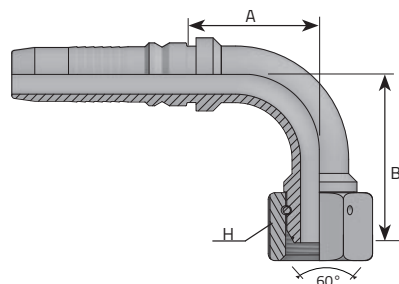

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch		mm	Inch		mm	mm	mm		
KF90G1212	-12	3/4"	19	3/4"	14	32	59	54	420	6091
KF90G1616	-16	1"	25.4	1"	11	38	72	70.5	420	6091
KF90G1620	-16	1"	25.4	1.1/4"	11	50	80	70.5	420	6091
KF90G2020	-20	1.1/4"	31.8	1.1/4"	11	50	93	87.7	420	6091
KF90G2424	-24	1.1/2"	38.1	1.1/2"	11	55	114	99.5	345	5004
KF90G3232	-32	2"	50.8	2"	11	70	136	135	345	5004

INTERLOCK BSPP FEMALE 45° (O-RING) - THURST-WIRE NUT


FEMMINA 45° BSPP SV60° DADO SPINATO CON O-RING
 FEMELLE 45° AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKR 45° BOGEN MIT O-RING + GESTIFTETE ÜBERWURFMUTTER (BSPP-GEWINDE)
 HEMBRA BSPP A 45° CON O-RING CONO 60° (TUERCA CON SEGURO)

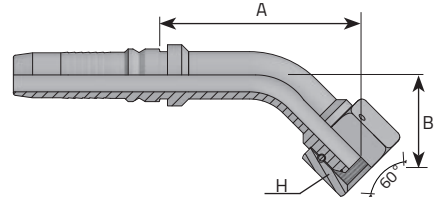

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch		mm	mm	mm			
KF45G1212	-12	3/4"	19	3/4"	14	32	29	60.7	420	6091
KF45G1616	-16	1"	25.4	1"	11	38	41	87.5	420	6091
KF45G1620	-16	1"	25.4	1.1/4"	11	50	44	90.5	420	6091
KF45G2020	-20	1.1/4"	31.8	1.1/4"	11	50	44	100.5	420	6091
KF45G2424	-24	1.1/2"	38.1	1.1/2"	11	55	45	116.5	345	5004
KF45G3232	-32	2"	50.8	2"	11	70	68	156	345	5004

INTERLOCK NPTF MALE

MASCHIO NPTF
MÂLE NPTF CÔNE 60°
AGN 60° INNENKONUS (NPTF)
MACHO NPTF CONO 60°

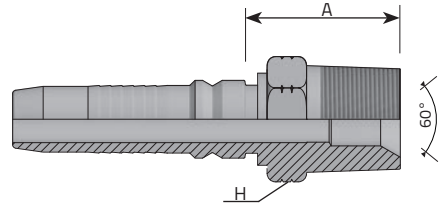

Code	Tube			Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A		Bar	Psi
		Inch	mm	Inch		mm	mm	mm			
KMNPTF1212	-12	3/4"	19	3/4"	14	27	34.5	96.5		420	6091
KMNPTF1216	-12	3/4"	19	1"	11.5	36	42.5	104.5		420	6091
KMNPTF1616	-16	1"	25.4	1"	11.5	36	43	115		420	6091
KMNPTF1620	-16	1"	25.4	1.1/4"	11.5	46	43	115		420	6091
KMNPTF2020	-20	1.1/4"	31.8	1.1/4"	11.5	46	44	137.5		420	6091
KMNPTF2024	-20	1.1/4"	31.8	1.1/2"	11.5	50	44	137.5		420	6091
KMNPTF2424	-24	1.1/2"	38.1	1.1/2"	11.5	50	45.5	139		345	5004
KMNPTF3232	-32	2"	50.8	2"	11.5	65	57	155		345	5004


INTERLOCK JIC 37° MALE

MASCHIO JIC SV 37°

MÂLE JIC CÔNE 37°

AGJ 37° JIC AUSSENKONUS (UNF- GEWINDE)


MACHO JIC CONO 37°

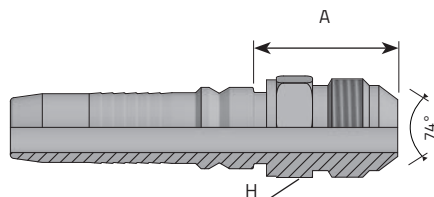

Code	Tube			Thread		Dimensions		Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm		
KMJ1212	-12	3/4"	19	1.1/16"	12	27	38	420	6091
KMJ1214	-12	3/4"	19	1.3/16"	12	32	39	420	6091
KMJ1216	-12	3/4"	19	1.5/16"	12	34	39	420	6091
KMJ1616	-16	1"	25.4	1.5/16"	12	34	40	414	6004
KMJ1620	-16	1"	25.4	1.5/8"	12	42	42.5	414	6004
KMJ2020	-20	1.1/4"	31.8	1.5/8"	12	42	44	414	6004
KMJ2024	-20	1.1/4"	31.8	1.7/8"	12	50	51	414	6004
KMJ2424	-24	1.1/2"	38.1	1.7/8"	12	50	51	345	5004
KMJ3232	-32	2"	50.8	2.1/2"	12	65	61.5	345	5004

INTERLOCK JIC 37° FEMALE


FEMMINA DIRITTA JIC SV 37° DADO SPINATO
FEMELLE DROIT JIC CÔNE 37° (ÉCROU À JONC)
DKJ 37° (UNF) + GESTIFTETE ÜBERWURFMUTTER
HEMBRA RECTA JIC ASIENTO 37° (TUERCA CON SEGURO)

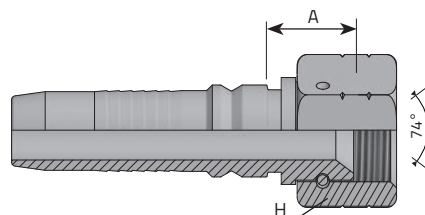

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
		Inch	mm	Inch		mm	mm			
KFDJ1212	-12	3/4"	19	1.1/16"	12	32	20.5		420	6091
KFDJ1214	-12	3/4"	19	1.3/16"	12	36	20.5		420	6091
KFDJ1216	-12	3/4"	19	1.5/16"	12	41	20.5		420	6091
KFDJ1616	-16	1"	25.4	1.5/16"	12	41	22		414	6004
KFDJ1620	-16	1"	25.4	1.5/8"	12	50	26		414	6004
KFDJ2020	-20	1.1/4"	31.8	1.5/8"	12	50	27.5		414	6004
KFDJ2024	-20	1.1/4"	31.8	1.7/8"	12	55	29.5		414	6004
KFDJ2424	-24	1.1/2"	38.1	1.7/8"	12	55	29.5		345	5004
KFDJ3232	-32	2"	50.8	2.1/2"	12	70	33		345	5004

INTERLOCK JIC 37° FEMALE 90°


FEMMINA 90° JIC SV 37° DADO SPINATO
 FEMELLE 90° JIC CÔNE 37° (ÉCROU À JONC)
 DKJ 90° BOGEN 37° DICHTKOPF (UNF) + GESTIFTETE ÜBERWURFMUTTER
 HEMBRA JIC A 90° CONO 37° (TUERCA CON SEGURO)

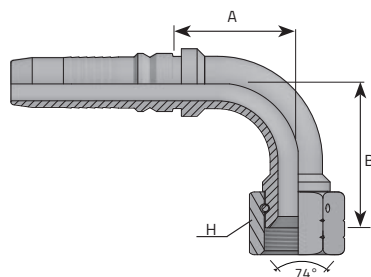

Code	Tube			Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	B		Bar	Psi
	Inch		mm	Inch		mm	mm	mm			
KF90J1212	-12	3/4"	19	1.1/16"	12	32	58	51		420	6091
KF90J1214	-12	3/4"	19	1.3/16"	12	36	61	51		420	6091
KF90J1216	-12	3/4"	19	1.5/16"	12	41	62.5	51		420	6091
KF90J1616	-16	1"	25.4	1.5/16"	12	41	69.5	70.5		414	6004
KF90J1620	-16	1"	25.4	1.5/8"	12	50	78.5	70.5		414	6004
KF90J2020	-20	1.1/4"	31.8	1.5/8"	12	50	91.5	87.5		414	6004
KF90J2024	-20	1.1/4"	31.8	1.7/8"	12	55	99	87.5		414	6004
KF90J2424	-24	1.1/2"	38.1	1.7/8"	12	55	112.5	99.5		345	5004
KF90J3232	-32	2"	50.8	2.1/2"	12	70	101	110		345	5004

INTERLOCK JIC 37° FEMALE 90° ELBOW (LONG DROP)


FEMMINA 90° JIC SV 37° DADO SPINATO LONG DROP
 FEMELLE 90° JIC CÔNE 37° (ÉCROU À JONC)
 DKJ 90° BOGEN 37° DICHTKOPF (UNF) + GESTIFTETE ÜBERWURFMUTTER
 HEMBRA JIC A 90° CONO 37° (TUERCA CON SEGURO)



Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	B	Bar	Psi
	Inch		mm	Inch		mm	mm	mm		
KF90J1212LD	-12	3/4"	19	1.1/16"	12	32	62	94.5	420	6091
KF90J1616LD	-16	1"	25.4	1.5/16"	12	41	77	110	380	5511
KF90J1620LD	-16	1"	25.4	1.5/8"	12	50	77	116	325	4713
KF90J2020LD	-20	1.1/4"	31.8	1.5/8"	12	50	89	136	325	4713
KF90J2424LD	-24	1.1/2"	38.1	1.7/8"	12	55	101	162	290	4206
KF90J3232LD	-32	2"	50.8	2.1/2"	12	70	135	220	250	3626

INTERLOCK JIC 37° FEMALE 45° ELBOW


FEMMINA 45° JIC SV 37° DADO SPINATO
 FEMELLE 45° JIC CÔNE 37° (ÉCROU À JONC)
 DKJ 45° BOGEN 37° DICHTKOPF (UNF) + GESTIFTETE ÜBERWURFMUTTER
 HEMBRA JIC A 45° CONO 37° (TUERCA CON SEGURO)

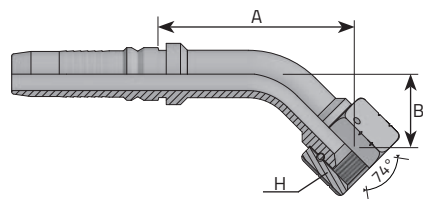

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch	mm	mm	mm	mm	mm		
KF45J1212	-12	3/4"	19	1.1/16"	12	32	29	59.5	420	6091
KF45J1214	-12	3/4"	19	1.3/16"	12	36	29	60.5	420	6091
KF45J1216	-12	3/4"	19	1.5/16"	12	41	29	60.5	420	6091
KF45J1616	-16	1"	25.4	1.5/16"	12	41	39.5	86	414	6004
KF45J1620	-16	1"	25.4	1.5/8"	12	50	38.5	87	414	6004
KF45J2020	-20	1.1/4"	31.8	1.5/8"	12	50	44	99.5	414	6004
KF45J2024	-20	1.1/4"	31.8	1.7/8"	12	55	45	101.5	414	6004
KF45J2424	-24	1.1/2"	38.1	1.7/8"	12	55	45	116.5	345	5004
KF45J3232	-32	2"	50.8	2.1/2"	12	70	65.8	156	345	5004

INTERLOCK METRIC MALE 24° CONE - S TYPE


MASCHIO METRICO 24° DKOS
 MÂLE MÉTRIQUE CÔNE 24° - SÉRIE S
 CES METRISCH 24° KONUS
 MACHO MÉTRICO CONO 24° - SERIE S

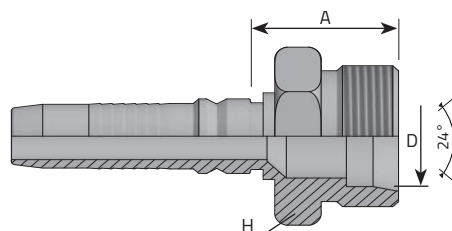

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	D	H	A	Bar	Psi
	Inch	mm	mm	mm	mm	mm	mm		
KME1230S20	-12	3/4"	19	M30 x 2	20	32	31.5	420	6091
KME1236S25	-12	3/4"	19	M36 x 2	25	38	33.5	420	6091
KME1636S25	-16	1"	25.4	M36 x 2	25	38	36	414	6004
KME1642S30	-16	1"	25.4	M42 x 2	30	46	39.5	280	4061
KME2042S30	-20	1.1/4"	31.8	M42 x 2	30	46	40.5	250	3626
KME2052S38	-20	1.1/4"	31.8	M52 x 2	38	55	44.5	250	3626
KME2452S38	-24	1.1/2"	38.1	M52 x 2	38	55	44.5	250	3626

INTERLOCK METRIC FEMALE 24° CONE - S TYPE


FEMMINA DIRITTA METRICA 24° DKOS CON O-RING
 FEMELLE DROIT MÉTRIQUE AVEC O-RING CÔNE 24° - SÉRIE S
 DKO-S INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA RECTA MÉTRICA CON O-RING CONO 24° - SERIE S

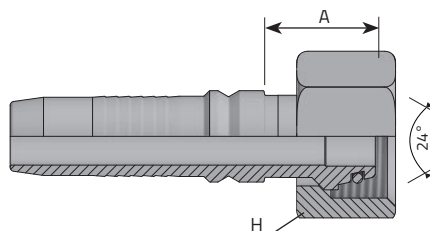

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	H	A	Bar	Psi
	Inch		mm		mm	mm	mm		
KFE1030S20	-10	5/8"	16	M30 x 2	20			420	6091
KFE1230S20	-12	3/4"	19	M30 x 2	20	36	35	420	6091
KFE1236S25	-12	3/4"	19	M36 x 2	25	46	36	420	6091
KFE1636S25	-16	1"	25.4	M36 x 2	25	46	37	414	6004
KFE1642S30	-16	1"	25.4	M42 x 2	30	50	38	280	4061
KFE2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	40	250	3626
KFE2052S38	-20	1.1/4"	31.8	M52 x 2	38	60	45.5	250	3626
KFE2452S38	-24	1.1/2"	38.1	M52 x 2	38	60	45.5	250	3626

INTERLOCK METRIC FEMALE 24° CONE 90° - S TYPE

FEMMINA 90° METRICA O-RING 24° DKOS
 FEMELLE 90° MÉTRIQUE AVEC O-RING CÔNE 24° - SÉRIE S
 DKO-S 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA A 90° CON O-RING CONO 24° - SERIE S

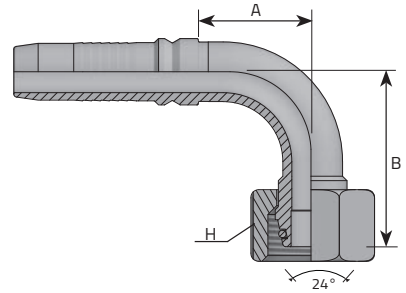

	Code	Tube			Thread	Dimensions				Pressure		
		D.N.	Hose	Diam	T	t/1"	D	H	B	A		
		Inch		mm	mm		mm	mm	mm	mm	Bar	Psi
	KF90E1030S20	-10	5/8"	16	M30 x 2		20	-	-	-	420	6091
	KF90E1230S20	-12	3/4"	19	M30 x 2		20	36	59	54	420	6091
	KF90E1236S25	-12	3/4"	19	M36 x 2		25	46	59	54	420	6091
	KF90E1636S25	-16	1"	25.4	M36 x 2		25	46	75	70.5	414	6004
	KF90E1642S30	-16	1"	25.4	M42 x 2		30	50	75	70.5	280	4061
	KF90E2042S30	-20	1.1/4"	31.8	M42 x 2		30	50	86	90.5	250	3626
	KF90E2052S38	-20	1.1/4"	31.8	M52 x 2		38	60	86	90.5	250	3626
	KF90E2452S38	-24	1.1/2"	38.1	M52 x 2		38	60	94	97.5	250	3626


INTERLOCK METRIC FEMALE 24° CONE 45° ELBOW - S TYPE

FEMMINA 90° METRICA O-RING 24° DKOS

FEMELLE 90° MÉTRIQUE AVEC O-RING CÔNE 24° - SÉRIE S

DKO-S 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS


HEMBRA MÉTRICA A 90° CON O-RING CONO 24° - SERIE S

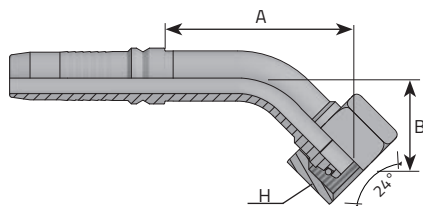

	Code	Tube		Thread		Dimensions				Pressure		
		D.N.	Hose	Diam	T	t/1"	D	H	B	A		
		Inch		mm	mm		mm	mm	mm	mm	Bar	Psi
	KF45E1030S20	-10	5/8"	16	M30 x 2		20	-	-	-	420	6091
	KF45E1230S20	-12	3/4"	19	M30 x 2		20	36	27	61.5	420	6091
	KF45E1236S25	-12	3/4"	19	M36 x 2		25	46	28	67.5	420	6091
	KF45E1636S25	-16	1"	25.4	M36 x 2		25	46	38	86	414	6004
	KF45E1642S30	-16	1"	25.4	M42 x 2		30	50	38	86.5	280	4061
	KF45E2042S30	-20	1.1/4"	31.8	M42 x 2		30	50	35	103	250	3626
	KF45E2052S38	-20	1.1/4"	31.8	M52 x 2		38	60	35	103	250	3626
	KF45E2452S38	-24	1.1/2"	38.1	M52 x 2		38	60	45	117.5	250	3626

INTERLOCK ORFS MALE


MASCHIO ORFS
 MÂLE ORFS
 AGF ORFS STIRNDICHTEND
 MACHO ORFS

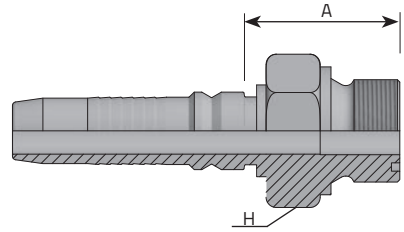

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
	Inch		mm	Inch		mm	mm			
KMORFS1215	-12	3/4"	19	1.7/16"	12	41	35.7		420	6091
KMORFS1615	-16	1"	25.4	1.7/16"	12	41	36.6		414	6004
KMORFS1621	-16	1"	25.4	1.11/16"	12	46	36.6		414	6004
KMORFS2021	-20	1.1/4"	31.8	1.11/16"	12	46	37.7		414	6004

INTERLOCK ORFS FEMALE


FEMMINA DIRITTA ORFS
FEMELLE DROIT ORFS
DK-ORFS (UNF GEWINDE)
HEMBRA RECTA ORFS

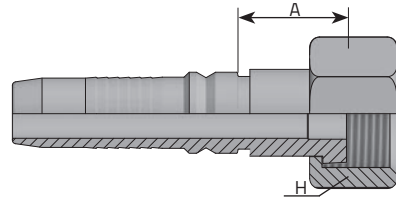

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	Inch		mm	mm		
KFORFS1014	-10	5/8"	16	1.3/16"	12	-	-	420	6091
KFORFS1214	-12	3/4"	19	1.3/16"	12	36	30.5	420	6091
KFORFS1215	-12	3/4"	19	1.7/16"	12	41	31.5	414	6004
KFORFS1615	-16	1"	25.4	1.7/16"	12	41	32.5	414	6004
KFORFS1621	-16	1"	25.4	1.11/16"	12	-	-	-	-
KFORFS2021	-20	1.1/4"	31.8	1.11/16"	12	50	34	250	3626

INTERLOCK ORFS FEMALE - 90° ELBOW


FEMMINA 90° ORFS
FEMELLE 90° ORFS
DK 90° BOGEN ORFS - UNF STIRNDICHTEND
HEMBRA ORFS CODO 90°

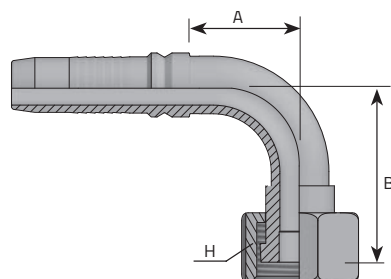

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
KF900RFS1014	-10	5/8"	16	1.3/16"	12	-	-	-	-	
KF900RFS1214	-12	3/4"	19	1.3/16"	12	36	49	53.5	420	6091
KF900RFS1215	-12	3/4"	19	1.7/16"	12	41	54	54	410	5946
KF900RFS1615	-16	1"	25.4	1.7/16"	12	41	59.5	71.5	410	5946
KF900RFS1621	-16	1"	25.4	1.11/16"	12	-	-	-	-	-
KF900RFS2021	-20	1.1/4"	31.8	1.11/16"	12	50	75.5	88.5	250	3626

INTERLOCK ORFS FEMALE 90° ELBOW (LONG DROP)


FEMMINA 90° ORFS LONG DROP
 FEMELLE 90° ORFS
 DK 90° BOGEN ORFS - UNF STIRNDICHTEND
 HEMBRA ORFS A 90°

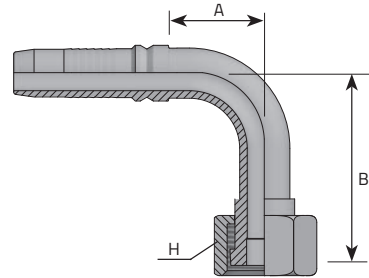

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch			mm	mm	mm		
KF90ORFS1214LD	-12	3/4"	19	1.3/16"	12	36	96	50	420	6091
KF90ORFS1615LD	-16	1"	25.4	1.7/16"	12	41	113	62	414	6004
KF90ORFS2021LD	-20	1.1/4"	31.8	1.11/16"	12	50	130	87	250	3626

INTERLOCK ORFS FEMALE 45° ELBOW

FEMMINA 45° ORFS
 FEMELLE 45° ORFS
 DK 45° BOGEN ORFS - UNF STIRNDICHTEND
 HEMBRA ORFS A 45°

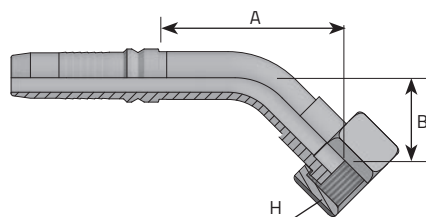


Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
KF45ORFS1014	-10	5/8"	16	1.3/16"	12	-	-	-	-	-
KF45ORFS1214	-12	3/4"	19	1.3/16"	12	36	23	55.5	420	6091
KF45ORFS1215	-12	3/4"	19	1.7/16"	12	41	27	60	410	5946
KF45ORFS1615	-16	1"	25.4	1.7/16"	12	41	26	78.5	410	5946
KF45ORFS1621	-16	1"	25.4	1.11/16"	12	-	-	-	-	-
KF45ORFS2021	-20	1.1/4"	31.8	1.11/16"	12	50	34	91.5	250	3626

INTERLOCK FLANGE CODE 61 - 3000 PSI

FLANGIA DIRITTA SAE J518 3000 PSI INTERA
 BRIDE DROIT 3000 PSI (PIÈCE ENTIER)
 FLANSCHANSCHLUSS 3000 PSI – EINTEILIG
 BRIDA RECTA 3000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

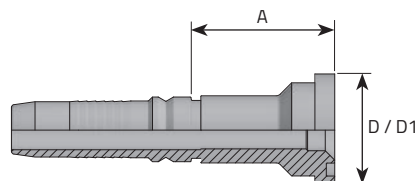


Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	D1	A	Bar	Psi
	Inch	mm	mm		Inch	mm	mm		
KFDL1212I	-12	3/4"	19		3/4"	38.1	56.7	420	6091
KFDL1216I	-12	3/4"	19		1"	44.5	48.7	420	6091
KFDL1612I	-16	1"	25.4		3/4"	38.1	47.6	415	6019
KFDL1616I	-16	1"	25.4		1"	44.5	47.6	415	6019
KFDL1620I	-16	1"	25.4		1.1/4"	50.8	64.6	415	6019
KFDL2020I	-20	1.1/4"	31.8		1.1/4"	50.8	68.7	250	3626
KFDL2024I	-20	1.1/4"	31.8		1.1/2"	60.3	78.7	250	3626
KFDL2424I	-24	1.1/2"	38.1		1.1/2"	60.3	68.5	200	2901
KFDL2432I	-24	1.1/2"	38.1		2"	71.4	70.5	200	2901
KFDL3232I	-32	2"	50.8		2"	71.4	70.5	200	2901

INTERLOCK FLANGE CODE 61 - 3000 PSI - 90° ELBOW

FLANGIA 90° SAE J518 3000 PSI INTERA
 BRIDE 90° 3000 PSI (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS 3000 PSI – EINTEILIG
 BRIDA A 90° 3000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

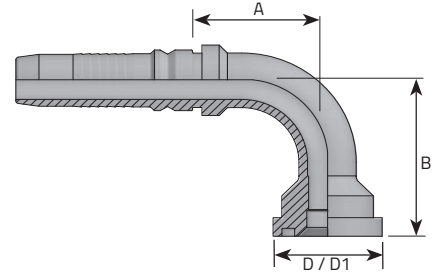


	Code	Tube			Thread	Dimensions				Pressure	
		D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch		mm		Inch	mm	mm	mm		
	KF90L1212I	-12	3/4"	19		3/4"	38.1	58	54.7	420	6091
	KF90L1216I	-12	3/4"	19		1"	44.5	62	54.7	420	6091
	KF90L1612I	-16	1"	25.4		3/4"	38.1	60	74.6	415	6019
	KF90L1616I	-16	1"	25.4		1"	44.5	68	70.6	415	6019
	KF90L1620I	-16	1"	25.4		1.1/4"	50.8	70	74.6	415	6019
	KF90L2020I	-20	1.1/4"	31.8		1.1/4"	50.8	87	87.7	250	3626
	KF90L2024I	-20	1.1/4"	31.8		1.1/2"	60.3	88	87.7	250	3626
	KF90L2424I	-24	1.1/2"	38.1		1.1/2"	60.3	102	99.5	200	2901
	KF90L2432I	-24	1.1/2"	38.1		2"	71.4	118	99.5	200	2901
	KF90L3232I	-32	2"	50.8		2"	71.4	12	144	200	2901

INTERLOCK FLANGE CODE 61 -3000 PSI -90° ELBOW (LONG DROP)

FLANGIA 90° SAE J518 3000 PSI INTERA
 BRIDE 90° 3000 PSI (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS 3000 PSI – EINTEILIG
 BRIDA A 90° 3000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring




Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch	mm		Inch	mm	mm	mm		
KF90L1212ILD	-12	3/4"	19		3/4"	38.1	96.8	54.7	420	6091
KF90L1216ILD	-12	3/4"	19		1"	44.5	135.5	54.7	420	6091
KF90L1616ILD	-16	1"	25.4		1"	44.5	115.5	70.6	415	6019
KF90L2020ILD	-20	1.1/4"	31.8		1.1/4"	50.8	115.2	87.7	250	3626
KF90L2424ILD	-24	1.1/2"	38.1		1.1/2"	60.3	131.4	99.5	200	2901

INTERLOCK FLANGE CODE 61 - 3000 PSI - 45° ELBOW

FLANGIA 45° SAE J518 3000 PSI INTERA
 BRIDE 45° 3000 PSI (PIÈCE ENTIER)
 45° FLANSCHANSCHLUSS 3000 PSI – EINTEILIG
 BRIDA A 45° 3000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

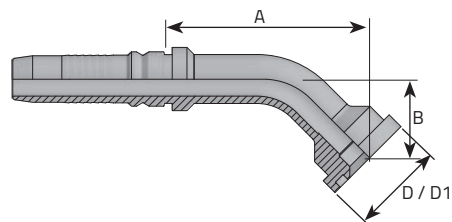

Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch	mm		Inch	mm	mm	mm		
KF45L1212I	-12	3/4"	19		3/4"	38.1	32	64.7	420	6091
KF45L1216I	-12	3/4"	19		1"	44.5	35	67.7	420	6091
KF45L1612I	-16	1"	25.4		3/4"	38.1	35	80.6	415	6019
KF45L1616I	-16	1"	25.4		1"	44.5	32	83.6	415	6019
KF45L1620I	-16	1"	25.4		1.1/4"	50.8	36	87.6	415	6019
KF45L2020I	-20	1.1/4"	31.8		1.1/4"	50.8	43	98.7	250	3626
KF45L2024I	-20	1.1/4"	31.8		1.1/2"	60.3	44	99.7	250	3626
KF45L2424I	-24	1.1/2"	38.1		1.1/2"	60.3	41	110.5	200	2901
KF45L2432I	-24	1.1/2"	38.1		2"	71.4	52	121.5	200	2901
KF45L3232I	-32	2"	50.8		2"	71.4	59	148	200	2901

INTERLOCK FLANGE CODE 62 - 6000 PSI

FLANGIA DIRITTA SAE J518 6000 PSI INTERA


BRIDE DROIT 6000 PSI (PIÈCE ENTIER)

FLANSCHANSCHLUSS 6000 PSI – EINTEILIG

BRIDA RECTA 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /

Sans O-Ring / Ohne O-Ring/ Sin O-Ring

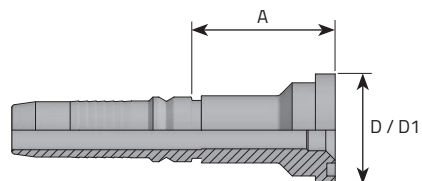


Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	D1	A	Bar	Psi
	Inch	mm	mm		Inch	mm	mm		
KFDP1212I	-12	3/4"	19		3/4"	41.3	50	420	6091
KFDP1216I	-12	3/4"	19		1"	47.6	61.7	420	6091
KFDP1612I	-16	1"	25.4		3/4"	41.3	61.6	420	6091
KFDP1616I	-16	1"	25.4		1"	47.6	63.6	420	6091
KFDP1620I	-16	1"	25.4		1.1/4"	54	68.6	420	6091
KFDP2020I	-20	1.1/4"	31.8		1.1/4"	54	68.7	420	6091
KFDP2024I	-20	1.1/4"	31.8		1.1/2"	63.5	76.7	420	6091
KFDP2424I	-24	1.1/2"	38.1		1.1/2"	63.5	76.5	420	6091
KFDP2432I	-24	1.1/2"	38.1		2"	79.4	70.5	420	6091
KFDP3232I	-32	2"	50.8		2"	79.4	73	420	6091

INTERLOCK FLANGE CODE 62 - 6000 PSI - 90° ELBOW

FLANGIA DIRITTA SAE J518 6000 PSI INTERA
 BRIDE 90° 6000 PSI (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS 6000 PSI – EINTEILIG
 BRIDA A 90° 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

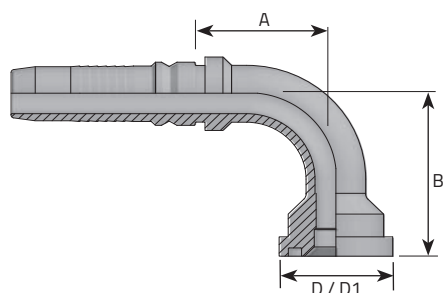


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch	mm		Inch	mm	mm	mm		
KF90P1212I	-12	3/4"	19		3/4"	41.3	62	54.7	420	6091
KF90P1216I	-12	3/4"	19		1"	47.6	67	54.7	420	6091
KF90P1612I	-16	1"	25.4		3/4"	41.3	64	74.6	415	6019
KF90P1616I	-16	1"	25.4		1"	47.6	69	70.6	415	6019
KF90P1620I	-16	1"	25.4		1.1/4"	54	76	74.6	415	6019
KF90P2020I	-20	1.1/4"	31.8		1.1/4"	54	93	87.7	415	6019
KF90P2024I	-20	1.1/4"	31.8		1.1/2"	63.5	97	87.7	415	6019
KF90P2424I	-24	1.1/2"	38.1		1.1/2"	63.5	111	99.5	345	5004
KF90P2432I	-24	1.1/2"	38.1		2"	79.4	128	110	345	5004
KF90P3232I	-32	2"	50.8		2"	79.4	128	144	345	5004

INTERLOCK FLANGE CODE 62 6000 PSI 90° ELBOW (LONG DROP)

FLANGIA DIRITTA SAE J518 6000 PSI INTERA
 BRIDE 90° 6000 PSI (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS 6000 PSI – EINTEILIG
 BRIDA A 90° 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

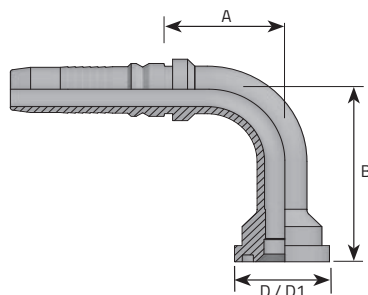


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch	mm		Inch	mm	mm	mm		
KF90P1212ILD	-12	3/4"	19		3/4"	41.3	100	54.7	420	6091
KF90P1216ILD	-12	3/4"	19		1"	47.6	137	54.7	420	6091
KF90P1616ILD	-16	1"	25.4		1"	47.6	120	70.6	415	6019
KF90P2020ILD	-20	1.1/4"	31.8		1.1/4"	54	115	87.7	415	6019
KF90P2424ILD	-24	1.1/2"	38.1		1.1/2"	63.5	135	95	415	6019

INTERLOCK FLANGE CODE 62-6000 PSI- 45° ELBOW

FLANGIA 45° SAE J5186000 PSI INTERA
 BRIDE 45° 6000 PSI (PIÈCE ENTIER)
 45° FLANSCHANSCHLUSS 6000 PSI – EINTEILIG
 BRIDA A 45° 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

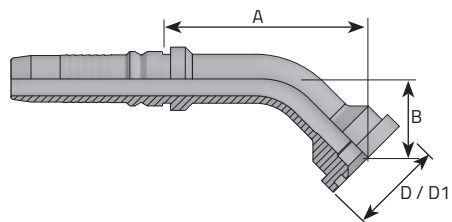


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
	Inch	mm	mm		Inch	mm	mm	mm		
KF45P1212I	-12	3/4"	19		3/4"	41.3	35	67.7	420	6091
KF45P1216I	-12	3/4"	19		1"	47.6	39	71.7	420	6091
KF45P1612I	-16	1"	25.4		3/4"	41.3	32	83.6	415	6019
KF45P1616I	-16	1"	25.4		1"	47.6	35	86.6	415	6019
KF45P1620I	-16	1"	25.4		1.1/4"	54	40	91.6	415	6019
KF45P2020I	-20	1.1/4"	31.8		1.1/4"	54	47	102.7	415	6019
KF45P2024I	-20	1.1/4"	31.8		1.1/2"	63.5	50	105.7	415	6019
KF45P2424I	-24	1.1/2"	38.1		1.1/2"	63.5	47	116.5	345	5004
KF45P2432I	-24	1.1/2"	38.1		2"	79.4	64	145	345	5004
KF45P3232I	-32	2"	50.8		2"	79.4	64	153	345	5004

INTERLOCK SUPERCAT FLANGE

FLANGIA DIRITTA SUPERCAT
BRIDE DROIT SUPERCAT (PIÈCE ENTIER)
FLANSCHANSCHLUSS SUPERCAT EINTEILIG
BRIDA RECTA SUPERCAT (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
Sans O-Ring / Ohne O-Ring/ Sin O-Ring

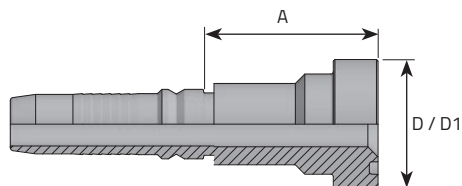


Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	D1	A	Bar	Psi
	Inch	mm	mm		Inch	mm	mm		
KFDS1212I	-12	3/4"	19		3/4"	41.3	55.7	420	6091
KFDS1216I	-12	3/4"	19		1"	47.6	67.7	420	6091
KFDS1616I	-16	1"	25.4		1"	47.6	69.6	420	6091
KFDS1620I	-16	1"	25.4		1.1/4"	54	72.6	420	6091
KFDS2020I	-20	1.1/4"	31.8		1.1/4"	54	69.7	420	6091
KFDS2024I	-20	1.1/4"	31.8		1.1/2"	63.5	78.7	420	6091
KFDS2424I	-24	1.1/2"	38.1		1.1/2"	63.5	78.5	420	6091

INTERLOCK SUPERCAT FLANGE 90°

FLANGIA 90° SUPERCAT
 BRIDE 90° SUPERCAT (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS SUPERCAT EINTEILIG
 BRIDA A 90° SUPERCAT (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

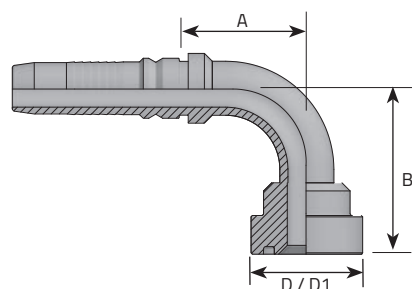


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch	mm		Inch	mm	mm	mm		
KF90S1212I	-12	3/4"	19		3/4"	41.3	67	54.7	420	6091
KF90S1216I	-12	3/4"	19		1"	47.6	73	54.7	420	6091
KF90S1616I	-16	1"	25.4		1"	47.6	75	70.6	415	6019
KF90S1620I	-16	1"	25.4		1.1/4"	54	80	74.6	415	6019
KF90S2020I	-20	1.1/4"	31.8		1.1/4"	54	97	87.7	415	6019
KF90S2024I	-20	1.1/4"	31.8		1.1/2"	63.5	99	87.7	415	6019
KF90S2424I	-24	1.1/2"	38.1		1.1/2"	63.5	113	99.5	345	5004

INTERLOCK SUPERCAT FLANGE - 90° ELBOW (LONG DROP)

FLANGIA 90° SUPERCAT
 BRIDE 90° SUPERCAT (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS SUPERCAT EINTEILIG
 BRIDA A 90° SUPERCAT (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

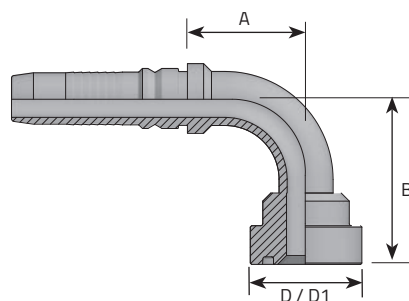


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
	Inch		mm		Inch	mm	mm	mm		
KF90S1212ILD	-12	3/4"	19		3/4"	41.3	105.4	54.7	420	6091
KF90S1216ILD	-12	3/4"	19		1"	47.6	144.8	54.7	420	6091
KF90S1616ILD	-16	1"	25.4		1"	47.6	124.8	70.6	415	6019
KF90S2020ILD	-20	1.1/4"	31.8		1.1/4"	54	124	87.7	415	6019
KF90S2424ILD	-24	1.1/2"	38.1		1.1/2"	63.5	141.7	99.5	345	5004

INTERLOCK SUPERCAT FLANGE 45° ELBOW

FLANGIA 45° SUPERCAT
 BRIDE 45° SUPERCAT (PIÈCE ENTIER)
 45° FLANSCHANSCHLUSS SUPERCAT EINTEILIG
 BRIDA A 45° SUPERCAT (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

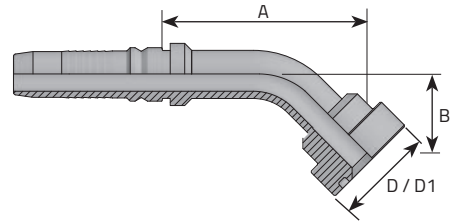


Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch	mm		Inch	mm	mm	mm		
KF45S1212I	-12	3/4"	19		3/4"	41.3	39	71.7	420	6091
KF45S1216I	-12	3/4"	19		1"	47.6	43	75.7	420	6091
KF45S1616I	-16	1"	25.4		1"	47.6	40	91.6	415	6019
KF45S1620I	-16	1"	25.4		1.1/4"	54	43	94.6	415	6019
KF45S2020I	-20	1.1/4"	31.8		1.1/4"	54	50	105.7	415	6019
KF45S2024I	-20	1.1/4"	31.8		1.1/2"	63.5	51	106.7	415	6019
KF45S2424I	-24	1.1/2"	38.1		1.1/2"	63.5	49	118.5	345	5004

Waterblast

FERRULE FOR WATERBLAST 4 SPIRAL HOSE

BOCCOLA PER TUBO WATERBLAST A 4 SPIRALI
 JUPE POUR WATERBLAST
 PRESSHÜLSE WATERBLAST
 CASQUILLO PARA WATERBLAST (4 ESPIRALES)

Double skive - Doppia pelatura - Double dénudable -
 Schaelfassung - Doble peladura




Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
WB4-06	-6	3/8"	9.5		30	57.5	
WB4-08	-8	1/2"	12.8		34	65	
WB4-12	-12	3/4"	19		45	69	
WB4-16	-16	1"	25.4		48	66.5	

FERRULE FOR WATERBLAST 6 SPIRAL HOSE

BOCCOLA PER TUBO WATERBLAST A 6 SPIRALI
 JUPE POUR WATERBLAST
 PRESSHÜLSE WATERBLAST
 CASQUILLO PARA WATERBLAST (6 ESPIRALES)


Double skive - Doppia pelatura - Double dénudable -
 Schaelfassung - Doble peladura



	Code	Tube			Thread	Dimensions		Pressure
		D.N.	Hose	Diam		D	L	
			Inch	mm		mm	mm	
	WB6-08	-8	1/2"	12.8		38	64.5	
	WB6-12	-12	3/4"	19		48	69	

INTERLOCK NPTF MALE FOR WATERBLAST HOSE


MASCHIO NPTF SV 60° SAE J516 PER TUBO WATERBLAST
 MÂLE NPTF CÔNE 60° POUR WATERBLAST
 AGN 60° INNENKONUS (NPTF) FÜR WATERBLAST
 MACHO NPTF CONO 60° PARA WATERBLAST

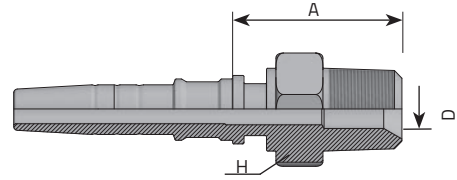

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	D	Bar	Psi
	Inch		mm	Inch		mm	mm	mm		
KMNPTF0606WB	-6	3/8"	9.5	3/8"	18	22	38	8.5		
KMNPTF0808WB	-8	1/2"	12.8	1/2"	14	27	44.6	10		
KMNPTF1212WB	-12	3/4"	19	3/4"	14	32	49.4	15		
KMNPTF1616WB	-16	1"	25.4	1"	11.5	36	44.4	20.5		

INTERLOCK METRIC FEMALE FOR WATERBLAST HOSE

FEMMINA DIRITTA METRICA SERIE PESANTE DIN 3865PER TUBO WATERBLAST
 FEMELLE DROIT MÉTRIQUE SÉRIE S POUR WATERBLAST
 DKM 24° KONUS – SERIE S FÜR WATERBLAST
 HEMBRA MÉTRICA CONO 24° SERIE S PARA WATERBLAST

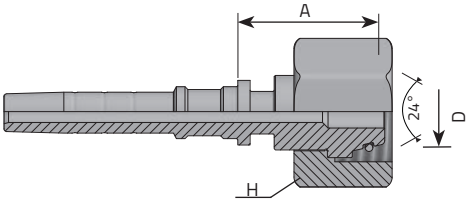


	Code	Tube		Thread		Dimensions				Pressure	
		D.N.	Hose	Diam	T	t/1"	H	A	D	Bar	Psi
		Inch		mm	mm		mm	mm	mm		
	KFE0622S14WB	-6	3/8"	9.5	M22 x 1.5	14	27	32	4.8		
	KFE0624S16WB	-6	3/8"	9.5	M24 x 1.5	16	32	34.2	6.3		
	KFE0824S16WB	-8	1/2"	12.8	M24 x 1.5	16	32	35.4	6.3		
	KFE1236S25WB	-12	3/4"	19	M36 x 2	25	46	44.7	12		
	KFE1642S30WB	-16	1"	25.4	M42 x 2	30	50	40	20.5		

HyperSpiral

FERRULE FOR SPIRAL HOSE

BOCCOLA PER TUBO SPIRALATO
JUPE POUR
PRESSHÜLSE
CASQUILLO PARA

No skive - Senza pelatura - Non-dénudable -
Nichtschaelfassung - Sin pelar




Code	Tube			Thread	Dimensions		Pressure
	D.N.	Hose	Diam		D	L	
		Inch	mm		mm	mm	
HB4NS06	-6	3/8"	9.5		33	43.9	
HB4NS08	-8	1/2"	12.8		36	45.5	
HB4NS10	-10	5/8"	16		42	50.3	
HB4NS12	-12	3/4"	19		45	55.2	
HB4NS16	-16	1"	25.4		54	68.3	
HB4NS20	-20	1.1/4"	31.8		64	75.2	
* HB6NS20	-20	1.1/4"	31.8		68	75.2	

* FOR HOSE 4SP - R13 - R15
PER TUBO 4SP - R13 - R15

BSPP MALE - 60° CONE

MASCHIO BSPP SV 60°
 MÂLE BSPP CÔNE 60°
 AGR 60° INNENKONUS (BSPP GEWINDE)
 MACHO FIJO BSPP CONO 60°

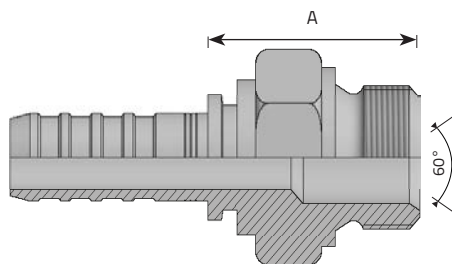


Code	Tube		Thread		Dimensions			Pressure
	D.N.	Hose	Diam	T	t/1"	H1	A	
		Inch	mm	Inch		mm	mm	
HMG0606	-6	3/8"	9.5	3/8"	19	22	33.5	
HMG0608	-6	3/8"	9.5	1/2"	14	27	36	
HMG0806	-8	1/2"	12.8	3/8"	19	27	33.5	
HMG0808	-8	1/2"	12.8	1/2"	14	27	36	
HMG0810	-8	1/2"	12.8	5/8"	14	30	38	
HMG0812	-8	1/2"	12.8	3/4"	14	32	33.5	
HMG1010	-10	5/8"	16	5/8"	14	32	39	
HMG1012	-10	5/8"	16	3/4"	14	32	39	
HMG1016	-10	5/8"	16	1"	11	38	42.5	
HMG1208	-12	3/4"	19	1/2"	14	34	37	
HMG1210	-12	3/4"	19	5/8"	14	34	39Z	
HMG1212	-12	3/4"	19	3/4"	14	34	39	
HMG1216	-12	3/4"	19	1"	11	38	42.5	
HMG1612	-16	1"	25.4	1"	11	42	41	
HMG1616	-16	1"	25.4	1"	11	42	42.5	
HMG1620	-16	1"	25.4	1.1/4"	11	50	44	
HMG2020	-20	1.1/4"	31.8	1.1/4"	11	50	50.2	
HMG2024	-20	1.1/4"	31.8	1.1/2"	11	55	51.2	

BSPP FEMALE - 60° CONE THRUST-WIRE NUT

FEMMINA DIRITTA BSPP SV 60° DADO SPINATO CON O-RING
FEMELLE DROITE BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
DKOR 60° KONUS MIT O-RING (BSPP- GEWINDE) + GESTIFTETE
ÜBERWURFMUTTER
HEMBRA GIRATORIA RECTA BSPP CON O-RING CONO 60°
(TUERCA CON SEGURO)

* : without o-ring / senza o-ring

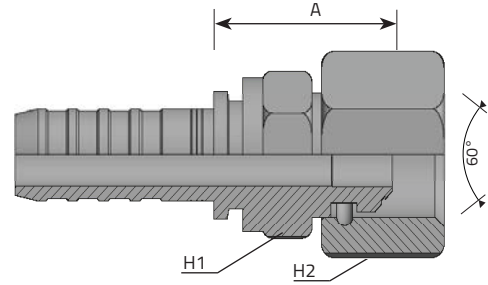


	Code	Tube		Thread		Dimensions				Pressure
		D.N.	Hose	Diam	T	t/1"	H1	H2	A	
		Inch		mm	Inch		mm	mm		
*	HFDG0606SP	-6	3/8"	9.5	3/8"	19	22	22	32	
*	HFDG0608SP	-6	3/8"	9.5	1/2"	14	22	27	33	
*	HFDG0806SP	-8	1/2"	12.8	3/8"	19	27	22	32	
*	HFDG0808SP	-8	1/2"	12.8	1/2"	14	27	27	33	
*	HFDG0810SP	-8	1/2"	12.8	5/8"	14	-	-	-	
	HFDG0812SP	-8	1/2"	12.8	3/4"	14	27	32	37	
*	HFDG1008SP	-10	5/8"	16	1/2"	14	32	27	34	
	HFDG1010SP	-10	5/8"	16	5/8"	14	-	-	-	
	HFDG1012SP	-10	5/8"	16	3/4"	14	32	32	38	
*	HFDG1208SP	-12	3/4"	19	1/2"	14	34	27	34	
	HFDG1212SP	-12	3/4"	19	3/4"	14	34	32	38	
	HFDG1216SP	-12	3/4"	19	1"	11	34	41	38	
	HFDG1612SP	-16	1"	25.4	3/4"	14	42	32	40	
	HFDG1616SP	-16	1"	25.4	1"	11	42	41	40	
	HFDG1620SP	-16	1"	25.4	1.1/4"	11	42	50	41.5	
	HFDG2020SP	-20	1.1/4"	31.8	1.1/4"	11	50	50	47.7	
	HFDG2024SP	-20	1.1/4"	31.8	1.1/2"	11	50	55	49.7	

BSPP FEMALE 90° ELBOW THRUST-WIRE NUT

FEMMINA 90° BSPP SV60° DADO SPINATO CON O-RING
FEMELLE 90° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
DKOR 90° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) +
GESTIFTETE
HEMBRA GIRATORIA A 90° BSPP CON O-RING (TUERCA CON SEGURO)

* : without o-ring / senza o-ring

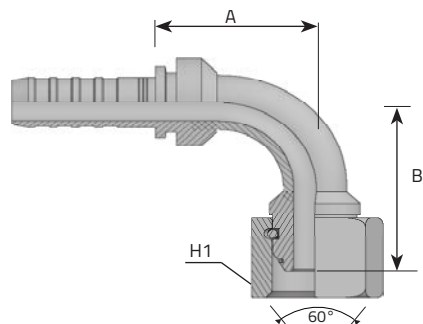


	Code	Tube		Thread		Dimensions				Pressure
		D.N.	Hose	Diam	T	t/1"	H1	B	A	
			Inch	mm	Inch		mm	mm	mm	
*	HF90G0606SP	-6	3/8"	9.5	3/8"	19	22	41,0	39,0	
*	HF90G0608SP	-6	3/8"	9.5	1/2"	14	27	42,5	39,0	
*	HF90G0806SP	-8	1/2"	12.8	3/8"	19	22	43,0	43,5	
*	HF90G0808SP	-8	1/2"	12.8	1/2"	14	27	46,0	43,5	
	HF90G0812SP	-8	1/2"	12.8	3/4"	14	27	51,5	43,5	
*	HF90G1008SP	-10	5/8"	16	1/2"	14	32	57,0	55,5	
	HF90G1012SP	-10	5/8"	16	3/4"	14	32	56,5	55,5	
*	HF90G1208SP	-12	3/4"	19	1/2"	14	27	57,0	59,0	
	HF90G1212SP	-12	3/4"	19	3/4"	14	32	61,0	59,0	
	HF90G1216SP	-12	3/4"	19	1"	11	34	66,5	59,0	
	HF90G1612SP	-16	1"	25.4	3/4"	14	42	71,5	74,0	
	HF90G1616SP	-16	1"	25.4	1"	11	42	75,0	78,5	
	HF90G1620SP	-16	1"	25.4	1.1/4"	11	42	79,5	78,5	
	HF90G2020SP	-20	1.1/4"	31.8	1.1/4"	11	50	92,5	96,7	
	HF90G2024SP	-20	1.1/4"	31.8	1.1/2"	11	55	97,5	96,7	

BSPP FEMALE 45° ELBOW THRUST-WIRE NUT

FEMMINA 45° BSPP SV60° DADO SPINATO CON O-RING
 FEMELLE 45° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 45° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) +
 GESTIFTETE
 HEMBRA GIRATORIA A 45° BSPP CON O-RING (TUERCA CON SEGURO)


* : without o-ring / senza o-ring

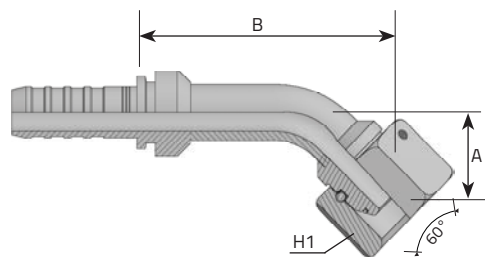

	Code	Tube		Thread		Dimensions				Pressure
		D.N.	Hose	Diam	T	t/1"	H1	A	B	
		Inch		mm	Inch		mm	mm	mm	
*	HF45G0606SP	-6	3/8"	9.5	3/8"	19	22	22,1	63,1	
*	HF45G0608SP	-6	3/8"	9.5	1/2"	14	27	24,4	65,4	
*	HF45G0806SP	-8	1/2"	12.8	3/4"	14	22	20,0	67,5	
*	HF45G0808SP	-8	1/2"	12.8	1/2"	14	27	23,7	70,2	
	HF45G0812SP	-8	1/2"	12.8	3/4"	14	27	21,4	70,9	
*	HF45G1008SP	-10	5/8"	16	1/2"	14	32	26,1	70,6	
	HF45G1012SP	-10	5/8"	16	3/4"	14	32	26,4	70,9	
*	HF45G1208SP	-12	3/4"	19	1/2"	14	27	28,7	68,2	
	HF45G1212SP	-12	3/4"	19	3/4"	14	32	30,4	69,9	
	HF45G1216SP	-12	3/4"	19	1"	11	-	32,1	71,6	
	HF45G1612SP	-16	1"	25.4	3/4"	14	42	38,6	93,1	
	HF45G1616SP	-16	1"	25.4	1"	11	42	43,1	97,6	
	HF45G1620SP	-16	1"	25.4	1.1/4"	11	42	43,6	98,1	
	HF45G2020SP	-20	1.1/4"	31.8	1.1/4"	11	50	43,6	117,3	
	HF45G2024SP	-20	1.1/4"	31.8	1.1/2"	11	55	44,3	117,0	

NPTF MALE


MASCHIO NPTF SV 60°
 MÂLE NPTF CÔNE 60°
 AGN 60° INNENKONUS (NPTF)
 MACHO NPTF CONO 60°

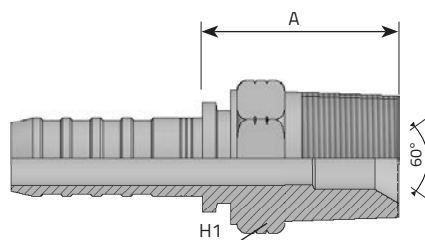

Code	Tube		Thread		Dimensions			Pressure
	D.N.	Hose	Diam	T	t/1"	H1	A	
		Inch	mm	Inch		mm	mm	
HMNPTF0606	-6	3/8"	9.5	3/8"	18	22	33.2	
HMNPTF0608	-6	3/8"	9.5	1/2"	14	22	39	
HMNPTF0808	-8	1/2"	12.8	1/2"	14	27	38	
HMNPTF0812	-8	1/2"	12.8	3/4"	14	30	38	
HMNPTF1008	-10	5/8"	16	1/2"	14	32	39	
HMNPTF1012	-10	5/8"	16	3/4"	14	32	39	
HMNPTF1212	-12	3/4"	19	3/4"	14	34	39	
HMNPTF1216	-12	3/4"	19	1"	11.5	36	45.9	
HMNPTF1612	-16	1"	25.4	3/4"	14	42	41	
HMNPTF1616	-16	1"	25.4	1"	11.5	42	49.5	
HMNPTF1620	-16	1"	25.4	1.1/4"	11.5	46	49.6	
HMNPTF2020	-20	1.1/4"	31.8	1.1/4"	11.5	50	52.8	

O-RING BOSS MALE


MASCHIO O-RING BOSS
 MÂLE O-RING BOSS
 SAE AUSSERGEWINDE O-RING BOSS
 MACHO FIJO O-RING BOSS (E)

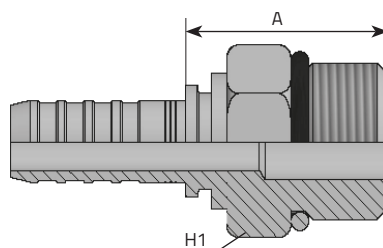

Code	Tube		Thread		Dimensions			Pressure
	D.N.	Hose	Diam	T	t/1"	H1	A	
		Inch	mm	Inch		mm	mm	
HMOB0606	-6	3/8"	9.5	9/16"	18	22	31	
HMOB0608	-6	3/8"	9.5	3/4"	16	22	33	
HMOB0610	-6	3/8"	9.5	7/8"	14	21	36	
HMOB0808	-8	1/2"	12.8	3/4"	16	27	33	
HMOB0810	-8	1/2"	12.8	7/8"	14	27	35	
HMOB0812	-8	1/2"	12.8	1.1/16"	12	32	37.5	
HMOB1008	-10	5/8"	16	3/4"	16	32	34.0	
HMOB1010	-10	5/8"	16	7/8"	14	32	36.0	
HMOB1012	-10	5/8"	16	1.1/16"	12	32	38.5	
HMOB1212	-12	3/4"	19	1.1/16"	12	34	38.5	
HMOB1216	-12	3/4"	19	1.5/16"	12	38	42.5	
HMOB1616	-16	1"	25.4	1.5/16"	12	42	40.5	
HMOB1620	-16	1"	25.4	1.5/8"	12	46	43.5	
HMOB2020	-20	1.1/4"	31.8	1.5/8"	12	50	46.7	

JIC 37° MALE


MASCHIO JIC SV 37°
 MÂLE JIC CÔNE 37°
 AGJ 37° JIC AUSSENKONUS (UNF – GEWINDE)
 MACHO JIC CONO 37°(E)

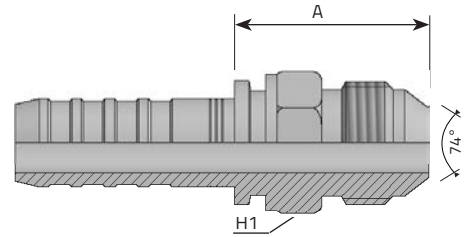

Code	Tube		Thread		Dimensions			Pressure
	D.N.	Hose	Diam	T	t/1"	H1	A	
		Inch	mm	Inch		mm	mm	
HMJ0606	-6	3/8"	9.5	9/16"	18	22	33	
HMJ0608	-6	3/8"	9.5	3/4"	16	22	35.5	
HMJ0610	-6	3/8"	9.5	7/8"	14	24	38.5	
HMJ0808	-8	1/2"	12.8	3/4"	16	27	35.5	
HMJ0810	-8	1/2"	12.8	7/8"	14	27	38.5	
HMJ1010	-10	5/8"	16	7/8"	14	32	39.5	
HMJ1012	16	5/8"	10	1.1/16"	12	32	42	
HMJ1210	20	3/4"	12	7/8"	14	34	39.5	
HMJ1212	20	3/4"	12	1.1/16"	12	34	42	
HMJ1214	20	3/4"	12	1.3/16"	12	34	43	
HMJ1216	20	3/4"	12	1.5/16"	12	34	43	
HMJ1612	25	1"	16	1.1/16"	12	42	44	
HMJ1616	25	1"	16	1.5/16"	12	42	45	
HMJ1620	25	1"	16	1.5/8"	12	42	46.5	
HMJ2020	32	1.1/4"	20	1.5/8"	12	50	52.7	
HMJ2024	40	1.1/4"	20	1.7/8"	12	50	57.2	

JIC 37° FEMALE THRUST WIRE NUT

FEMMINA DIRITTA JIC SV 37° DADO SPINATO
FEMELLE DROIT JIC CÔNE 37° (ÉCROU À JONC)
DKJ 37° JIC DICHTKOPF (UNF-GEWINDE) + GESTIFTETE ÜBERWURFMUTTER
HEMBRA GIRATORIA JIC CONO 37° (TUERCA CON SEGURO)

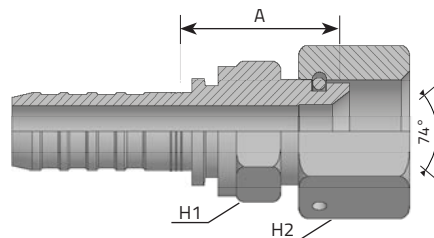

Code	Tube		Thread		Dimensions				Pressure
	D.N.	Hose	Diam	T	t/1"	H1	H2	A	
		Inch	mm	Inch		mm	mm	mm	
HFDJ0606SP	-6	3/8"	9.5	9/16"	18	22	19	29	
HFDJ0608SP	-6	3/8"	9.5	3/4"	16	22	24	30	
HFDJ0610SP	-6	3/8"	9.5	7/8"	14	22	27	33.4	
HFDJ0808SP	-8	1/2"	12.8	3/4"	16	27	24	30	
HFDJ0810SP	-8	1/2"	12.8	7/8"	14	27	27	30.4	
HFDJ0812SP	-8	1/2"	12.8	1.1/16"	12	27	32	33	
HFDJ1010SP	-10	5/8"	16	7/8"	14	32	27	31.4	
HFDJ1012SP	-10	5/8"	16	1.1/16"	12	32	32	34	
HFDJ1210SP	-12	3/4"	19	7/8"	14	34	27	31.4	
HFDJ1212SP	-12	3/4"	19	1.1/16"	12	34	32	34	
HFDJ1214SP	-12	3/4"	19	1.3/16"	12	-	-	-	
HFDJ1216SP	-12	3/4"	19	1.5/16"	12	34	41	34	
HFDJ1612SP	-16	1"	25.4	1.1/16"	12	42	32	36	
HFDJ1614SP	-16	1"	25.4	1.3/16"	12	-	-	-	
HFDJ1616SP	-16	1"	25.4	1.5/16"	12	42	41	36	
HFDJ1620SP	-16	1"	25.4	1.5/8"	12	42	50	40	
HFDJ2016SP	-20	1.1/4"	31.8	1.5/16"	12	50	41	41.2	
HFDJ2020SP	-20	1.1/4"	31.8	1.5/8"	12	50	50	46.2	
HFDJ2024SP	-20	1.1/4"	31.8	1.7/8"	12	50	55	48.2	


JIC 37° FEMALE - 90° ELBOW THRUST WIRE NUT

FEMMINA 90° JIC SV 37° CON DADO SPINATO

FEMELLE 90° JIC CÔNE 37° (ÉCROU À JONC)

DKJ 90° BOGEN 37° JIC DICHTKOPF (UNF) + GESTIFTETE ÜBERWURFMUTTER


HEMBRA GIRATORIA JIC CODO 90° CONO 37° (TUERCA CON SEGURO)

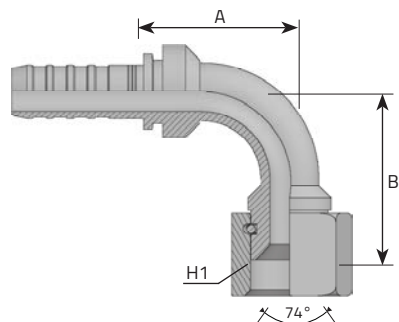

Code	Tube		Thread		Dimensions				Pressure
	D.N.	Hose	Diam	T	t/1"	H1	B	A	
		Inch	mm	Inch		mm	mm	mm	
HF90J0606SP	-6	3/8"	9.5	9/16"	18	19	37,0	39,0	
HF90J0608SP	-6	3/8"	9.5	3/4"	16	24	37,5	39,0	
HF90J0610SP	-6	3/8"	9.5	7/8"	14	27	47,0	39,0	
HF90J0808SP	-8	1/2"	12.8	3/4"	16	24	41,5	43,5	
HF90J0810SP	-8	1/2"	12.8	7/8"	14	27	43,0	43,5	
HF90J0812SP	-8	1/2"	12.8	1.1/16"	12	32	50,0	43,5	
HF90J1010SP	-10	5/8"	16	7/8"	14	27	50,5	55,5	
HF90J1012SP	-10	5/8"	16	1.1/16"	12	32	56,0	55,5	
HF90J1210SP	-12	3/4"	19	7/8"	14	27	63,6	59,0	
HF90J1212SP	-12	3/4"	19	1.1/16"	12	32	60,5	59,0	
HF90J1216SP	-12	3/4"	19	1.5/16"	12	41	65,0	59,0	
HF90J1612SP	-16	1"	25.4	1.1/16"	12	32	79,5	74,5	
HF90J1616SP	-16	1"	25.4	1.5/16"	12	41	69,0	78,5	
HF90J1620SP	-20	1"	31.8	1.5/8"	12	50	77,5	78,5	
HF90J2020SP	-20	1.1/4"	31.8	1.5/8"	12	50	90,5	96,7	
HF90J2024SP	-20	1.1/4"	31.8	1.7/8"	12	55	98,0	96,7	

JIC 37° FEMALE - 45° ELBOW THRUST WIRE NUT


FEMMINA 45° JIC SV 37° CON DADO SPINATO
FEMELLE 45° JIC CÔNE 37° (ÉCROU À JONC)
DKJ 45° BOGEN 37° JIC DICHTKOPF (UNF) + GESTIFTETE
ÜBERWURFMUTTER
HEMBRA GIRATORIA JIC CODO 45° CONO 37° (TUERCA CON SEGURO)

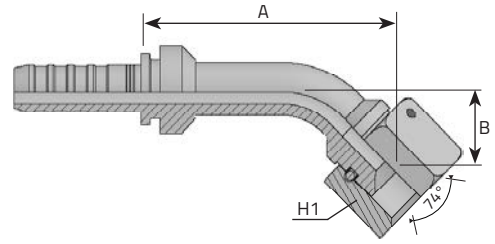

Code	Tube		Thread		Dimensions				Pressure
	D.N.	Hose	Diam	T	t/1"	H1	B	A	
		Inch	mm	Inch		mm	mm	mm	
HF45J0606SP	-6	3/8"	9.5	9/16"	18	19	19,4	60,4	
HF34J0608SP	-6	3/8"	9.5	3/4"	16	24	19,7	60,7	
HF45J0610SP	-6	3/8"	9.5	7/8"	14	27	26,3	67,3	
HF45J0808SP	-8	1/2"	12.8	3/4"	16	24	20,4	66,9	
HF45J0810SP	-8	1/2"	12.8	7/8"	14	27	21,4	67,9	
HF45J0812SP	-8	1/2"	12.8	1.1/16"	12	32	22,0	68,5	
HF45J1010SP	-10	5/8"	16	7/8"	14	27	22,4	66,9	
HF45J1012SP	-10	5/8"	16	1.1/16"	12	32	25,7	70,2	
HF45J1210SP	-12	3/4"	19	7/8"	14	27	33,0	71,5	
HF45J1212SP	-12	3/4"	19	1.1/16"	12	32	30,8	69,3	
HF45J1216SP	-12	3/4"	19	1.5/16"	12	41	30,8	70,3	
HF45J1612SP	-16	1"	25.4	1.1/16"	12	32	39,1	105,1	
HF45J1616SP	-16	1"	25.4	1.5/16"	12	41	39,1	93,6	
HF45J1620SP	-20	1"	31.8	1.5/8"	12	50	37,8	94,3	
HF45J2020SP	-20	1.1/4"	31.8	1.5/8"	12	50	43,3	108,0	
HF45J2024SP	-20	1.1/4"	31.8	1.7/8"	12	55	44,3	110,0	

METRIC MALE 24° CONE - L TYPE


MASCHIO METRICO 24° DKOL
 MÂLE MÉTRIQUE CÔNE 24° - SÉRIE L
 CEL 24° KONUS METRISCH
 MACHO MÉTRICO CONO 24° - SERIE L

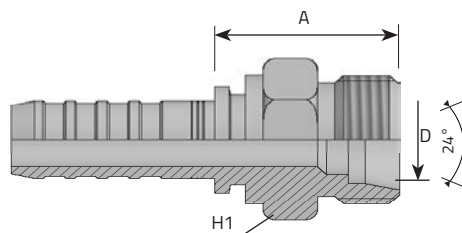

Code	Tube		Thread		Dimensions			Pressure
	D.N.	Hose	Diam	T	D	H1	A	
	Inch		mm	mm	mm	mm	mm	
HME0616L10	-6	3/8"	9.5	M16 x 1.5	10	22	30.2	
HME0618L12	-6	3/8"	9.5	M18 x 1.5	12	22	30.2	
HME0622L15	-6	3/8"	9.5	M22 x 1.5	15	24	32	
HME0818L12	-8	1/2"	12.8	M18 x 1.5	12	27	30	
HME0822L15	-8	1/2"	12.8	M22 x 1.5	15	27	31	
HME0826L18	-8	1/2"	12.8	M26 x 1.5	18	27	31	
HME1026L18	-10	5/8"	16	M26 x 1.5	18	32	32	
HME1030L22	-10	5/8"	16	M30 x 2	22	32	33.5	
HME1226L18	-12	3/4"	19	M26 x 1.5	18	34	32.0	
HME1230L22	-12	3/4"	19	M30 x 2	22	34	33.5	
HME1636L28	-16	1"	25.4	M36 x 2	28	42	36.0	
HME2045L35	-20	1.1/4"	31.8	M45 x 2	35	50	44.2	

METRIC FEMALE 24° CONE - L TYPE


FEMMINA 90° METRICA DKOL CON O-RING 24°
 FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L
 DKO-L 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA GIRATORIA MÉTRICA CON O-RING CONO 24° - SERIE L

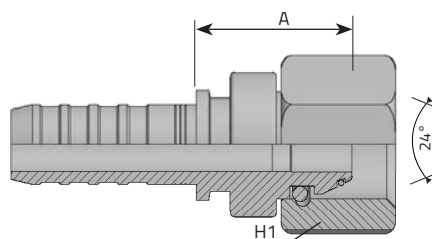

Code	Tube		Thread		Dimensions			Pressure
	D.N.	Hose	Diam	T	D	H1	A	
	Inch	mm	mm	mm	mm	mm	mm	
HFE0616L10	-6	3/8"	9.5	M16 x 1.5	10	22	36.2	
HFE0618L12	-6	3/8"	9.5	M18 x 1.5	12	22	36.5	
HFE0622L15	-6	3/8"	9.5	M18 x 1.5	15	27	39.9	
HFE0818L12	-8	1/2"	12.8	M18 x 1.5	12	27	36.5	
HFE0822L15	-8	1/2"	12.8	M22 x 1.5	15	27	39.9	
HFE0826L18	-8	1/2"	12.8	M26 x 1.5	18	27	38.7	
HFE1026L18	-10	5/8"	16	M26 x 1.5	18	32	39.7	
HFE1030L22	-10	5/8"	16	M30 x 2	22	32	42.6	
HFE1226L18	-12	3/4"	19	M26 x 1.5	18	34	39.7	
HFE1230L22	-12	3/4"	19	M30 x 2	22	34	42.6	
HFE1236L28	-12	3/4"	19	M36 x 2	28	34	46	
HFE1636L28	-16	1"	25.4	M36 x 2	28	42	46	
HFE2045L35	-20	1.1/4"	31.8	M45 x 2	35	50	54.3	

METRIC FEMALE 24° CONE - 90° ELBOW L TYPE


FEMMINA 90° METRICA DKOL CON O-RING 24°
FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L
DKO-L 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
HEMBRA GIRATORIA A 90° MÉTRICA CON O-RING CONO 24° - SERIE L

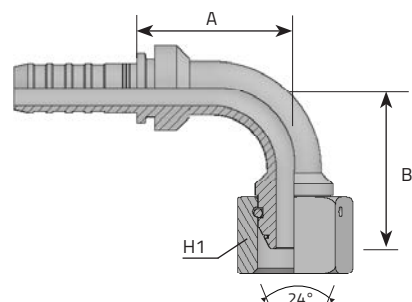

Code	Tube		Thread		Dimensions				Pressure
	D.N.	Hose	Diam	T	D	H1	B	A	
		Inch	mm	mm	mm	mm	mm	mm	
HF90E0616L10	-6	3/8"	9.5	M16 x 1.5	10	22	39,2	39,0	
HF90E0618L12	-6	3/8"	9.5	M18 x 1.5	12	22	44,3	41,8	
HF90E0622L15	-6	3/8"	9.5	M22 x 1.5	15	22	49,5	40,3	
HF90E0818L12	-8	1/2"	12.8	M18 x 1.5	12	27	50,0	43,5	
HF90E0822L15	-8	1/2"	12.8	M22 x 1.5	15	27	52,0	45,1	
HF90E0826L18	-8	1/2"	12.8	M26 x 1.5	18	27	52,8	44,7	
HF90E1026L18	-10	5/8"	16	M26 x 1.5	18	32	56,8	56,1	
HF90E1030L22	-10	5/8"	16	M30 x 2	22	32	61,7	55,4	
HF90E1226L18	-12	3/4"	19	M26 x 1.5	18	34	63,4	59,0	
HF90E1230L22	-12	3/4"	19	M30 x 2	22	34	65,2	62,1	
HF90E1236L28	-12	3/4"	19	M36 x 2	28	34	66,6	62,1	
HF90E1636L28	-16	1"	25.4	M36 x 2	28	42	84,1	76,6	
HF90E2045L35	-20	1.1/4"	31.8	M45 x 2	35	50	97,7	100,3	

METRIC FEMALE 24° CONE -45° ELBOW L TYPE


FEMMINA 45° METRICA O-RING 24° DKOL CON O-RING
FEMELLE 45° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L
DKO-L 45° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
HEMBRA MÉTRICA A 45° CON O-RING CONO 24° - SERIE L

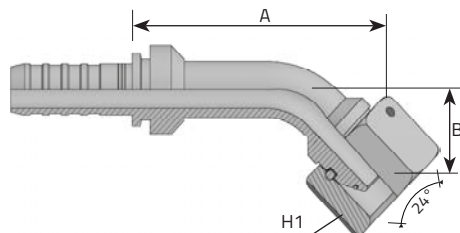

Code	Tube			Thread	Dimensions				Pressure
	D.N.	Hose	Diam		D	H1	B	A	
	Inch		mm		mm	mm	mm	mm	
HF45E0616L10	-6	3/8"	9.5	M16x 1.5	10	22	20,8	61,8	
HF45E0618L12	-6	3/8"	9.5	M18 x 1.5	12	22	21,8	68,1	
HF45E0622L15	-6	3/8"	9.5	M22 x 1.5	15	22	24,3	70,6	
HF45E0818L12	-8	1/2"	12.8	M18 x 1.5	12	27	27,7	70,2	
HF45E0822L15	-8	1/2"	12.8	M22 x 1.5	15	27	27,6	75,2	
HF45E0826L18	-8	1/2"	12.8	M26 x 1.5	18	27	30,4	74,6	
HF45E1026L18	-10	5/8"	16	M26 x 1.5	18	32	32,4	73,5	
HF45E1030L22	-10	5/8"	16	M30 x 2	22	32	36,2	76,5	
HF45E1226L18	-12	3/4"	19	M26 x 1.5	18	34	33,4	68,4	
HF45E1230L22	-12	3/4"	19	M30 x 2	22	34	33,9	75,5	
HF45E1236L28	-12	3/4"	19	M36 x 2	28	34	34,8	97,9	
HF45E1636L28	-16	1"	25.4	M36 x 2	28	42	46,7	97,3	
HF45E2045L35	-20	1.1/4"	31.8	M45 x 2	35	50	42,9	120,7	

METRIC MALE 24° CONE S TYPE

MASCHIO METRICO 24° DKOS
MÂLE MÉTRIQUE CÔNE 24° - SÉRIE S
CES METRISCH 24° KONUS
MACHO MÉTRICO CONO 24° - SERIE S

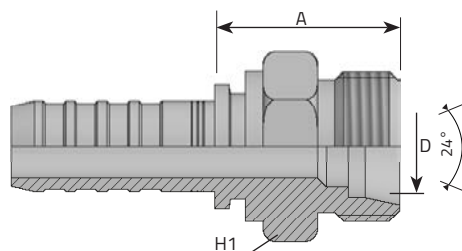

Code	Tube		Thread		Dimensions			Pressure
	D.N.	Hose	Diam	T	D	H1	A	
	Inch		mm	mm	mm	mm	mm	
HME0618S10	-6	3/8"	9.5	M18 x 1.5	10	22	30.2	
HME0620S12	-6	3/8"	9.5	M20 x 1.5	12	22	31	
HME0622S14	-6	3/8"	9.5	M22 x 1.5	14	24	34.5	
HME0822S16	-8	1/2"	12.8	M22 x 1.5	16	27	33.5	
HME0824S16	-8	1/2"	12.8	M24 x 1.5	16	27	33.5	
HME1030S20	-10	5/8"	16	M30 x 2	20	32	35.5	
HME1230S20	-12	3/4"	19	M30 x 2	20	34	36	
HME1236S25	-12	3/4"	19	M36 x 2	25	38	40	
HME1242S30	-12	3/4"	19	M42 x 2	30	46	45.0	
HME1636S25	-16	1"	25.4	M36 x 2	25	42	40	
HME1642S30	-16	1"	25.4	M42 x 2	30	46	45	
HME2052S38	-20	1.1/4"	31.8	M52 x 2	38	55	49.2	


METRIC FEMALE 24° CONE S TYPE

FEMMINA DIRITTA METRICA O-RING 24° DKOS

FEMELLE DROIT MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S

DKO-S INNENGEWINDE MIT O-RING 24° KONUS

HEMBRA MÉTRICA CONO 24° CON O-RING - SERIE S

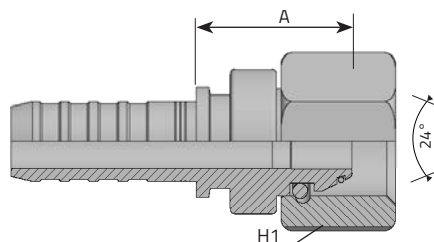

Code	Tube		Thread		Dimensions			Pressure
	D.N.	Hose	Diam	T	D	H1	A	
	Inch	mm	mm	mm	mm	mm	mm	
HFE0618S10	-6	3/8"	9.5	M18 x 1.5	10	22	36.5	
HFE0620S12	-6	3/8"	9.5	M20 x 1.5	12	22	38.5	
HFE0622S14	-6	3/8"	9.5	M22 x 1.5	14	22	39.2	
HFE0822S14	-8	1/2"	12.8	M22 x 1.5	14	27	39.2	
HFE0824S16	-8	1/2"	12.8	M24 x 1.5	16	27	39.7	
HFE0830S20	-8	1/2"	12.8	M30 x 2	20	27	41.5	
HFE1030S20	-10	5/8"	16	M30 x 2	20	32	42.5	
HFE1036S25	-10	5/8"	16	M36 x 2	25	32	44.7	
HFE1230S20	-12	3/4"	9.5	M30 x 2	20	34	42.5	
HFE1236S25	-12	3/4"	19	M36 x 2	25	34	44.7	
HFE1242S30	-12	3/4"	19	M42 x 2	30	42	49	
HFE1636S25	-16	1"	25.4	M36 x 2	25	42	46.7	
HFE1642S30	-16	1"	25.4	M42 x 2	30	42	49	
HFE2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	55.2	
HFE2052S38	-20	1.1/4"	31.8	M52 x 2	38	60	59.2	


METRIC FEMALE 24° CONE - 90° ELBOW - S TYPE

FEMMINA 90° METRICA O-RING 24° DKOS

FEMELLE 90° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S

DKO-S 90° BOGEN INNENGEWINDE MIT O-RING 24° KONUS

HEMBRA MÉTRICA A 90° CON O-RING CONO 24° - SERIE S

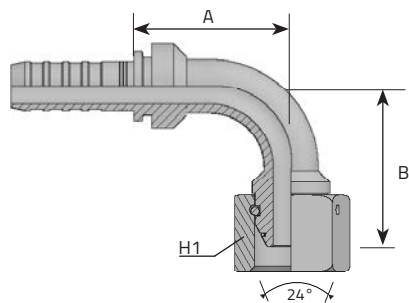

Code	Tube		Thread		Dimensions				Pressure
	D.N.	Hose	Diam	T	D	H1	B	A	
		Inch	mm	mm	mm	mm	mm	mm	
HF90E0618S10	-6	3/8"	9.5	M18 x 1.5	10	22	39,2	40,3	
HF90E0620S12	-6	3/8"	9.5	M20 x 1.5	12	22	46,3	41,8	
HF90E0622S14	-6	3/8"	9.5	M22 x 1.5	14	22	49,0	40,3	
HF90E0822S14	-8	1/2"	12.8	M22 x 1.5	14	27	49,8	44,6	
HF90E0824S16	-8	1/2"	12.8	M24 x 1.5	16	27	52,9	44,2	
HF90E0830S20	-8	1/2"	12.8	M30 x 2	20	27	57,0	44,2	
HF90E1030S20	-10	5/8"	16	M30 x 2	20	32	63,6	55,4	
HF90E1036S25	-10	5/8"	16	M36 x 2	25	32	68,8	55,4	
HF90E1230S20	-12	3/4"	19	M30 x 2	20	34	67,6	62,1	
HF90E1236S25	-12	3/4"	19	M36 x 2	25	34	69,3	62,1	
HF90E1636S25	-16	1"	25.4	M36 x 2	25	42	81,2	78,6	
HF90E1642S30	-16	1"	25.4	M42 x 2	30	42	89,6	78,6	
HF90E2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	96,1	100,3	
HF90E2052S38	-20	1.1/4"	31.8	M52 x 2	38	50	98,9	100,2	


METRIC FEMALE 24° CONE - 45° ELBOW - S TYPE

FEMMINA 45° METRICA O-RING 24° DKOS

FEMELLE 45° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S

DKO-S 45° BOGEN INNENGEWINDE MIT O-RING 24° KONUS


HEMBRA MÉTRICA A 45° CON O-RING CONO 24° - SERIE S

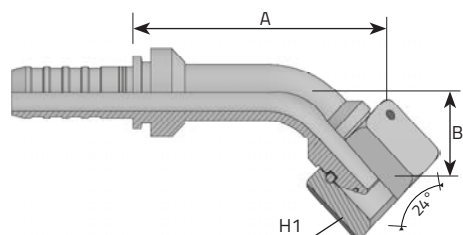

Code	Tube		Thread		Dimensions				Pressure
	D.N.	Hose	Diam	T	D	H1	B	A	
		Inch	mm	mm	mm	mm	mm	mm	
HF45E0618S10	-6	3/8"	9.5	M18 x 1.5	10	22	20,8	63,1	
HF45E0620S12	-6	3/8"	9.5	M20 x 1.5	12	22	23,2	69,5	
HF45E0622S14	-6	3/8"	9.5	M22 x 1.5	14	22	23,9	70,2	
HF45E0822S14	-8	1/2"	12.8	M22 x 1.5	14	27	26,1	74,1	
HF45E0824S16	-8	1/2"	12.8	M24 x 1.5	16	27	27,5	76,7	
HF45E0830S20	-8	1/2"	12.8	M30 x 2	20	27	27,4	75,1	
HF45E1030S20	-10	5/8"	16	M30 x 2	20	32	31,4	76,7	
HF45E1036S25	-10	5/8"	16	M36 x 2	25	32	32,9	79,7	
HF45E1230S20	-12	3/4"	19	M30 x 2	20	34	33,1	75,7	
HF45E1236S25	-12	3/4"	19	M36 x 2	25	34	35,2	82,8	
HF45E1636S25	-16	1"	25.4	M36 x 2	25	42	42,4	98,5	
HF45E1642S30	-16	1"	25.4	M42 x 2	30	42	48,3	104,9	
HF45E2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	42,1	119,9	
HF45E2052S38	-20	1.1/4"	31.8	M52 x 2	38	50	44,1	121,8	

ORFS MALE

MASCHIO ORFS
 MÂLE ORFS
 AGF ORFS STIRNDICHTEND
 MACHO ORFS

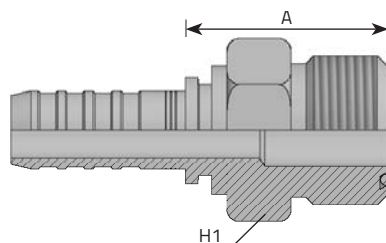

Code	Tube		Thread	Dimensions				Pressure
	D.N.	Hose	Diam	T	t/1"	H1	A	
		Inch	mm	Inch		mm	mm	
HMORFS0609	-6	3/8"	9.5	11/16"	16	22	31.5	
HMORFS0611	-6	3/8"	9.5	13/16"	16	22	32.5	
HMORFS0613	-6	3/8"	9.5	1"	14	27	36.5	
HMORFS0811	-8	1/2"	12.8	13/16"	16	27	32.5	
HMORFS0813	-8	1/2"	12.8	1"	16	27	35.5	
HMORFS0814	-8	1/2"	12.8	1.3/16"	16	32	37.0	
HMORFS1013	-10	5/8"	16	1"	14	32	36.5	
HMORFS1014	-10	5/8"	16	1.3/16"	16	32	38.0	
HMORFS1214	-12	3/4"	19	1.3/16"	16	34	38.0	
HMORFS1215	-12	3/4"	19	1.7/16"	12	41	41.5	
HMORFS1615	-16	1"	25.4	1.7/16"	12	42	41.5	
HMORFS2021	-20	1.1/4"	31.8	1.11/16"	12	50	45.7	


ORFS FEMALE (DOUBLE HEXAGON)

FEMMINA DIRITTA ORFS DOPPIO ESAGONO

FEMELLE DROIT ORFS

ORFS – UNF GEWINDE


HEMBRA GIRATORIA RECTA ORFS - DOBLE HEXAGONO

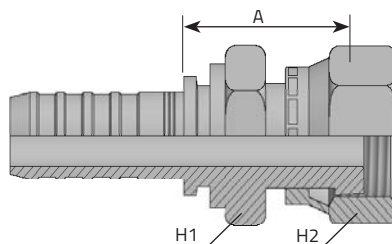

Code	Tube		Thread		Dimensions				Pressure
	D.N.	Hose	Diam	T	t/1"	H1	H2	A	
	Inch	mm	Inch			mm	mm	mm	
HFORFS0606GIR	-6	3/8"	9.5	9/16"	18	22	17	36.5	
HFORFS0609GIR	-6	3/8"	9.5	11/16"	16	22	22	39	
HFORFS0611GIR	-6	3/8"	9.5	13/16"	16	22	24	44.5	
HFORFS0809GIR	-8	1/2"	12.8	11/16"	16	27	22	39	
HFORFS0811GIR	-8	1/2"	12.8	13/16"	16	27	24	44	
HFORFS0813GIR	-8	1/2"	12.8	1"	14	27	30	44	
HFORFS0814GIR	-8	1/2"	12.8	1.3/16"	16	30	36	45.5	
HFORFS1013GIR	-10	5/8"	16	1"	14	32	30	45	
HFORFS1014GIR	-10	5/8"	16	1.3/16"	16	32	36	46.5	
HFORFS1213GIR	-12	3/4"	19	1"	14	34	30	45	
HFORFS1214GIR	-12	3/4"	19	1.3/16"	16	34	36	46.5	
HFORFS1215GIR	-12	3/4"	19	1.7/16"	12	36	41	47	
HFORFS1221GIR	-12	3/4"	19	1.11/16"	12	41	50	51	
HFORFS1614GIR	-16	1"	25.4	1.3/16"	16	42	36	48.5	
HFORFS1615GIR	-16	1"	25.4	1.7/16"	12	42	41	49	
HFORFS1621GIR	-16	1"	25.4	1.11/16"	12	42	50	51	
HFORFS2021GIR	-20	1.1/4"	31.8	1.11/16"	12	50	50	57.2	
HFORFS2032GIR	-20	1.1/4"	31.8	2"	12	50	60	57.2	

ORFS FEMALE SWIVEL 90° ELBOW


FEMMINA 90° ORFS
FEMELLE 90° ORFS
DK 90° BOGEN ORFS UNF STIRNDICHTEND
HEMBRA GIRATORIA A 90° ORFS

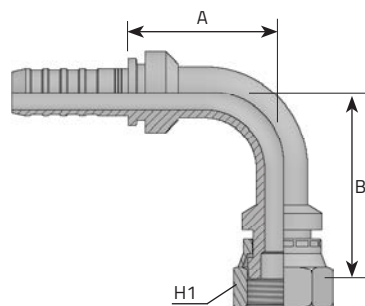

Code	Tube		Thread		Dimensions				Pressure
	D.N.	Hose	Diam	T	t/1"	H1	B	A	
		Inch	mm	Inch		mm	mm	mm	
HF900RFS0606	-6	3/8"	9.5	9/16"	18	22	46,5	38,5	
HF900RFS0609	-6	3/8"	9.5	11/16"	16	22	47,8	42,3	
HF900RFS0611	-6	3/8"	9.5	13/16"	16	27	52,6	40,3	
HF900RFS0809	-8	1/2"	12.8	11/16"	16	27	50,0	45,0	
HF900RFS0811	-8	1/2"	12.8	13/16"	16	27	58,1	42,6	
HF900RFS0813	-8	1/2"	12.8	1"	14	27	54,7	44,1	
HF900RFS0814	-8	1/2"	12.8	1.3/16"	16	30	58,1	43,1	
HF900RFS1013	-10	5/8"	16	1"	14	32	65,2	59,1	
HF900RFS1014	-10	5/8"	16	1.3/16"	16	32	64,6	54,1	
HF900RFS1213	-12	3/4"	19	1"	14	34	72,2	60,6	
HF900RFS1214	-12	3/4"	19	1.3/16"	16	34	73,6	61,6	
HF900RFS1215	-12	3/4"	19	1.7/16"	12	36	77,5	62,1	
HF900RFS1221	-12	3/4"	19	1.11/16"	12	41	83,9	97,6	
HF900RFS1614	-16	1"	25.4	1.3/16"	16	42	86,5	75,5	
HF900RFS1615	-16	1"	25.4	1.7/16"	12	42	85,6	79,6	
HF900RFS1621	-16	1"	25.4	1.11/16"	12	42	99,4	97,5	
HF900RFS2021	-20	1.1/4"	31.8	1.11/16"	12	41	99,9	98,1	
HF900RFS2032	-20	1.1/4"	31.8	2"	12	50	90,6	103,1	

ORFS FEMALE SWIVEL 45° ELBOW

FEMMINA 45° ORFS
 FEMELLE 45° ORFS
 DK 45° BOGEN ORFS UNF STIRNDICHTEND
 HEMBRA GIRATORIA A 45° ORFS

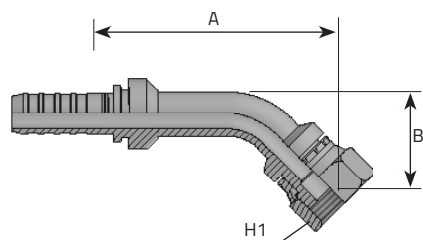

Code	Tube		Thread		Dimensions				Pressure
	D.N.	Hose	Diam	T	t/1"	H1	B	A	
	Inch		mm	Inch		mm	mm	mm	
HF45ORFS0606	-6	3/8"	9.5	9/16"	18	22	25,8	62,8	
HF45ORFS0609	-6	3/8"	9.5	11/16"	16	22	26,3	70,6	
HF45ORFS0611	-6	3/8"	9.5	13/16"	16	27	31,5	72,8	
HF45ORFS0809	-8	1/2"	12.8	11/16"	16	27	25,3	75,8	
HF45ORFS0811	-8	1/2"	12.8	13/16"	16	27	33,6	78,6	
HF45ORFS0813	-8	1/2"	12.8	1"	14	27	31,1	77,1	
HF45ORFS0814	-8	1/2"	12.8	1.3/16"	16	30	36,1	79,1	
HF45ORFS1013	-10	5/8"	16	1"	14	32	35,3	77,9	
HF45ORFS1014	-10	5/8"	16	1.3/16"	16	32	32,7	76,3	
HF45ORFS1213	-12	3/4"	19	1"	14	34	39,4	79,5	
HF45ORFS1214	-12	3/4"	19	1.3/16"	16	34	40,4	81,0	
HF45ORFS1215	-12	3/4"	19	1.7/16"	12	36	43,6	84,7	
HF45ORFS1221	-12	3/4"	19	1.11/16"	12	41	46,9	112,5	
HF45ORFS1614	-16	1"	25.4	1.3/16"	16	42	44,1	103,1	
HF45ORFS1615	-16	1"	25.4	1.7/16"	12	42	44,4	105,0	
HF45ORFS1621	-16	1"	25.4	1.11/16"	12	42	43,3	112,8	
HF45ORFS2021	-20	1.1/4"	31.8	1.11/16"	12	41	51,3	118,4	
HF45ORFS2032	-20	1.1/4"	31.8	2"	12	50	45,3	116,4	

FLANGE CODE 61 - 3000 PSI


FLANGIA 3000 PSI

BRIDE DROIT 3000 PSI (PIÈCE ENTIER)

FLANSCHANSCHLUSS 3000 PSI – EINTEILIG

BRIDA RECTA 3000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

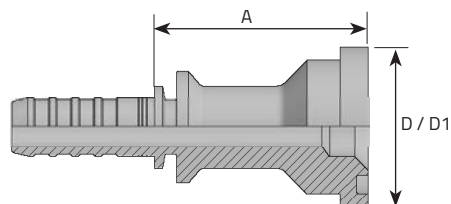


Code	Tube			Thread	Dimensions			Pressure
	D.N.	Hose	Diam		D	D1	A	
		Inch	mm		Inch	mm	mm	
HFDL0808I	-8	1/2"	12.8		1/2"	30.2	56.2	
HFDL0810I	-8	1/2"	12.8		5/8"	34	58.05	
HFDL0812I	-8	1/2"	12.8		3/4"	38.1	62.3	
HFDL1010I	-10	5/8"	16		5/8"	34	58.8	
HFDL1012I	-10	5/8"	16		3/4"	38.1	60.3	
HFDL1208I	-12	3/4"	19		1/2"	30.2	63.2	
HFDL1212I	-12	3/4"	19		3/4"	38.1	61.3	
HFDL1216I	-12	3/4"	19		1"	44.5	65	
HFDL1612I	-16	1"	25.4		3/4"	38.1	59	
HFDL1616I	-16	1"	25.4		1"	44.5	68	
HFDL1620I	-16	1"	25.4		1.1/4"	50.8	74	
HFDL2016I	-20	1.1/4"	31.8		1"	44.5	67.7	
HFDL2020I	-20	1.1/4"	31.8		1.1/4"	50.8	85.2	
HFDL2024I	-20	1.1/4"	31.8		1.1/2"	60.3	90.2	

FLANGE CODE 61 - 3000 PSI - 90° ELBOW

FLANGIA 90° SAE J518 3000 PSI INTERA
 BRIDE 90° 3000 PSI (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS 3000 PSI – EINTEILIG
 BRIDA A 90° 3000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compresso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

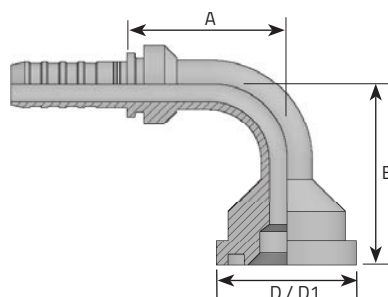

Code	Tube			Thread	Dimensions				Pressure
	D.N.	Hose	Diam		D	D1	B	A	
		Inch	mm		Inch	mm	mm	mm	
HF90L0808I	-8	1/2"	12.8		1/2"	30.2	43,0	43,5	
HF90L0810I	-8	1/2"	12.8		5/8"	34	47,0	43,5	
HF90L0812I	-8	1/2"	12.8		3/4"	38.1	50,0	43,5	
HF90L1010I	-10	5/8"	16		5/8"	34	52,0	55,5	
HF90L1012I	-10	5/8"	16		3/4"	38.1	55,0	55,5	
HF90L1208I	-12	3/4"	19		1/2"	30.2	52,0	62,5	
HF90L1212I	-12	3/4"	19		3/4"	38.1	58,0	62,5	
HF90L1216I	-12	3/4"	19		1"	44.5	62,0	62,5	
HF90L1612I	-16	1"	25.4		3/4"	38.1	59,5	82,5	
HF90L1616I	-16	1"	25.4		1"	44.5	63,5	82,5	
HF90L1620I	-16	1"	25.4		1.1/4"	50.8	69,5	82,5	
HF90L2020I	-20	1.1/4"	31.8		1.1/4"	50.8	86,0	96,7	
HF90L2024I	-20	1.1/4"	31.8		1.1/2"	60.3	87,0	96,7	

FLANGE CODE 61 - 3000 PSI - 45° ELBOW

FLANGIA 45° SAE J518 3000 PSI INTERA


BRIDE 45° 3000 PSI (PIÈCE ENTIER)

45° FLANSCHANSCHLUSS 3000 PSI – EINTEILIG

BRIDA A 45° 3000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /

Sans O-Ring / Ohne O-Ring/ Sin O-Ring

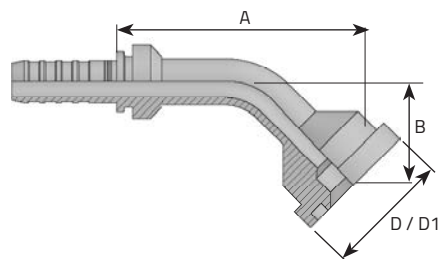

Code	Tube		Thread	Dimensions				Pressure
	D.N.	Hose	Diam	D	D1	B	A	
		Inch	mm	Inch	mm	mm	mm	
HF45L0808I	-8	1/2"	12.8	1/2"	30.2	23,0	67,5	
HF45L0810I	-8	1/2"	12.8	5/8"	34	25,0	72,5	
HF45L0812I	-8	1/2"	12.8	3/4"	38.1	28,0	72,5	
HF45L1010I	-10	5/8"	16	5/8"	34	30,0	69,5	
HF45L1012I	-10	5/8"	16	3/4"	38.1	30,0	69,5	
HF45L1208I	-12	3/4"	19	1/2"	30.2	28,0	68,5	
HF45L1212I	-12	3/4"	19	3/4"	38.1	32,0	72,5	
HF45L1216I	-12	3/4"	19	1"	44.5	35,0	75,5	
HF45L1612I	-16	1"	25.4	3/4"	38.1	34,6	88,1	
HF45L1616I	-16	1"	25.4	1"	44.5	31,6	91,1	
HF45L1620I	-16	1"	25.4	1.1/4"	50.8	35,6	95,1	
HF45L2020I	-20	1.1/4"	31.8	1.1/4"	50.8	42,3	107,0	
HF45L2024I	-20	1.1/4"	31.8	1.1/2"	60.3	43,3	108,0	


FLANGE CODE 62 - 6000 PSI

FLANGIA DIRITTA SAE J518 6000 PSI INTERA

BRIDE DROIT 6000 PSI (PIÈCE ENTIER)

FLANSCHANSCHLUSS 6000 PSI – EINTEILIG

BRIDA RECTA 6000 PSI (PIEZA UNICA)

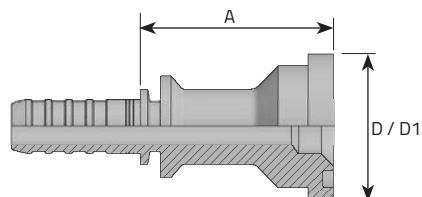

Do Not Include O-Ring / O-Ring Non Compreso /
Sans O-Ring / Ohne O-Ring/ Sin O-Ring

Code	Tube			Thread	Dimensions			Pressure
	D.N.	Hose	Diam		D	D1	A	
	Inch	mm	mm		Inch	mm	mm	
HFDP0808I	-8	1/2"	12.8		1/2"	31.7	61.2	
HFDP0812I	-8	1/2"	12.8		3/4"	41.3	64.5	
HFDP1008I	-10	5/8"	16		1/2"	31.7	65.2	
HFDP1012I	-10	5/8"	16		3/4"	41.3	63.5	
HFDP1212I	-12	3/4"	19		3/4"	41.3	66.5	
HFDP1216I	-12	3/4"	19		1"	47.6	75.03	
HFDP1612I	-16	1"	25.4		3/4"	41.3	78.5	
HFDP1616I	-16	1"	25.4		1"	47.6	82.03	
HFDP1620I	-16	1"	25.4		1.1/4"	54	87.3	
HFDP2020I	-20	1.1/4"	31.8		1.1/4"	54	87	
HFDP2024I	-20	1.1/4"	31.8		1.1/2"	63.5	98.8	

FLANGE CODE 62 - 6000 PSI - 90° ELBOW

FLANGIA A 90° SAE J518 6000 PSI INTERA


BRIDE 90° 6000 PSI (PIÈCE ENTIER)

90° FLANSCHANSCHLUSS 6000 PSI – EINTEILIG

BRIDA A 90° 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /

Sans O-Ring / Ohne O-Ring/ Sin O-Ring

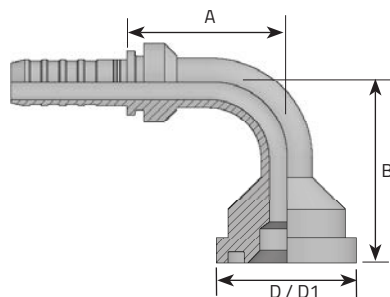


Code	Tube		Thread	Dimensions				Pressure
	D.N.	Hose	Diam	D	D1	B	A	
		Inch	mm	Inch	mm	mm	mm	
HF90P0808I	-8	1/2"	12.8	1/2"	31.7	44,0	43,5	
HF90P0812I	-8	1/2"	12.8	3/4"	41.3	51,0	43,5	
HF90P1008I	-10	5/8"	16	1/2"	31.7	50,0	55,5	
HF90P1012I	-10	5/8"	16	3/4"	41.3	59,0	56,5	
HF90P1212I	-12	3/4"	19	3/4"	41.3	62,0	62,5	
HF90P1216I	-12	3/4"	19	1"	47.6	67,0	62,5	
HF90P1612I	-16	1"	25.4	3/4"	41.3	63,5	82,5	
HF90P1616I	-16	1"	25.4	1"	47.6	68,5	82,5	
HF90P1620I	-16	1"	25.4	1.1/4"	54	72,5	82,5	
HF90P2020I	-20	1.1/4"	31.8	1.1/4"	54	92,0	96,7	
HF90P2024I	-20	1.1/4"	31.8	1.1/2"	63.5	96,0	96,7	

FLANGE CODE 62 - 6000 PSI - 45° ELBOW

FLANGIA A 45° SAE J518 6000 PSI INTERA
BRIDE 45° 6000 PSI (PIÈCE ENTIER)
45° FLANSCHANSCHLUSS 6000 PSI – EINTEILIG
BRIDA A 45° 6000 PSI (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
Sans O-Ring / Ohne O-Ring/ Sin O-Ring

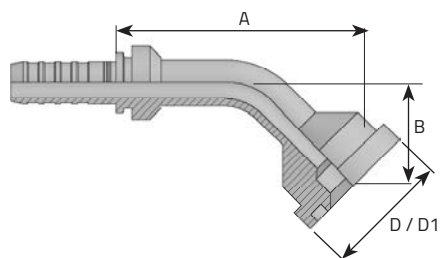


Code	Tube			Thread	Dimensions				Pressure
	D.N.	Hose	Diam		D	D1	B	A	
		Inch	mm		Inch	mm	mm	mm	
HF45P0808I	-8	1/2"	12.8		1/2"	31.7	23,0	68,5	
HF45P0812I	-8	1/2"	12.8		3/4"	41.3	28,0	73,5	
HF45P1008I	-10	5/8"	16		1/2"	31.7	26,0	66,5	
HF45P1012I	-10	5/8"	16		3/4"	41.3	30,0	73,5	
HF45P1212I	-12	3/4"	19		3/4"	41.3	32,0	75,5	
HF45P1216I	-12	3/4"	19		1"	47.6	35,0	79,5	
HF45P1612I	-16	1"	25.4		3/4"	41.3	34,6	91,1	
HF45P1616I	-16	1"	25.4		1"	47.6	31,6	94,1	
HF45P1620I	-16	1"	25.4		1.1/4"	54	35,6	99,1	
HF45P2020I	-20	1.1/4"	31.8		1.1/4"	54	42,3	111,0	
HF45P2024I	-20	1.1/4"	31.8		1.1/2"	63.5	43,3	114,0	

SUPERCAT FLANGE

FLANGIA DIRITTA SUPERCAT INTERA
 EMBOUT À BRIDE SUPERCAT DROITE (PIÈCE ENTIER)
 FLANSCHANSCHLUSS SUPERCAT EINTEILIG
 BRIDA RECTA SUPERCAT (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

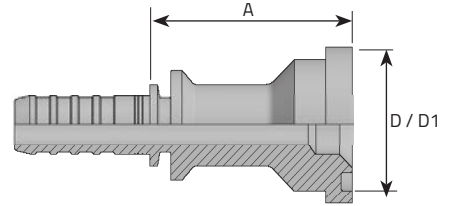


Code	Tube			Thread	Dimensions			Pressure
	D.N.	Hose	Diam		D	D1	A	
		Inch	mm		Inch	mm	mm	
HFDS1212I	-12	3/4"	19		3/4"	41.3	71.9	
HFDS1216I	-12	3/4"	19		1"	47.6	79.8	
HFDS1616I	-16	1"	25.4		1"	47.6	86.8	
HFDS1620I	-16	1"	25.4		1.1/4"	54	91.3	
HFDS2020I	-20	1.1/4"	31.8		1.1/4"	54	91.7	
HFDS2024I	-20	1.1/4"	31.8		1.1/2"	63.5	100.5	

SUPERCAT FLANGE - 90° ELBOW

FLANGIA 90° SUPERCAT INTERA
 BRIDE 90° SUPERCAT (PIÈCE ENTIER)
 90° FLANSCHANSCHLUSS SUPERCAT EINTEILIG
 BRIDA 90° SUPERCAT (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

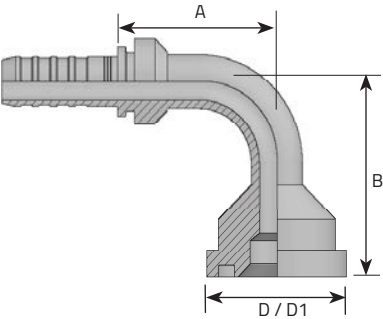


Code	Tube			Thread	Dimensions				Pressure
	D.N.	Hose	Diam		D	D1	B	A	
		Inch	mm		Inch	mm	mm	mm	
HF90S1212I	-12	3/4"	19		3/4"	41.3	67,0	62,5	
HF90S1216I	-12	3/4"	19		1"	47.6	73,0	62,5	
HF90S1616I	-16	1"	25.4		1"	47.6	74,5	82,5	
HF90S1620I	-16	1"	25.4		1.1/4"	54	80,0	82,5	
HF90S2020I	-20	1.1/4"	31.8		1.1/4"	54	96,0	96,7	
HF90S2024I	-20	1.1/4"	31.8		1.1/2"	63.5	98,0	96,7	

SUPERCAT FLANGE - 45° ELBOW

FLANGIA 45° SUPERCAT INTERA
BRIDE 45° SUPERCAT (PIÈCE ENTIER)
45° FLANSCHANSCHLUSS SUPERCAT EINTEILIG
BRIDA 45° SUPERCAT (PIEZA UNICA)

Do Not Include O-Ring / O-Ring Non Compreso /
Sans O-Ring / Ohne O-Ring/ Sin O-Ring

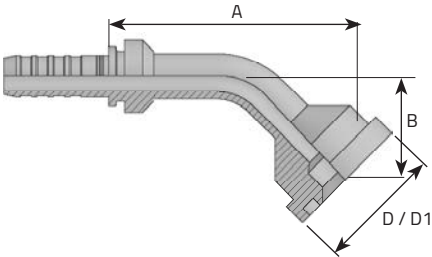

Code	Tube			Thread	Dimensions				Pressure
	D.N.	Hose	Diam		D	D1	B	A	
	Inch		mm		Inch	mm	mm	mm	
HF45S1212I	-12	3/4"	19		3/4"	41.3	39,0	79,5	
HF45S1216I	-12	3/4"	19		1"	47.6	43,0	83,5	
HF45S1616I	-16	1"	25.4		1"	47.6	39,6	99,1	
HF45S1620I	-16	1"	25.4		1.1/4"	54	42,6	102,1	
HF45S2020I	-20	1.1/4"	31.8		1.1/4"	54	49,3	114,0	
HF45S2024I	-20	1.1/4"	31.8		1.1/2"	63.5	50,3	115,0	

Press Fittings Catalogue a-2020 EU

Data reported in this catalogue are not binding.

Vitillo S.p.a. reserves the right to change specifications without notice.

I dati riportati nella seguente pubblicazione non sono vincolanti.

Vitillo S.p.a. si riserva di apportare modifiche senza preavviso.

Les données exposées dans ce catalogue ne sont pas contraignantes.

Vitillo s.p.a. se réserve le droit d'apporter des modifications sans aucun préavis.

Die vorliegenden Angaben sind nicht bindend.

Vitillo S.p.a. behält sich technische Änderungen vor ohne Mitteilung.

Los datos referidos en la presente publicación son indicativos.

Vitillo S.p.a. se reserva el derecho de modificar las especificaciones sin aviso previo.